
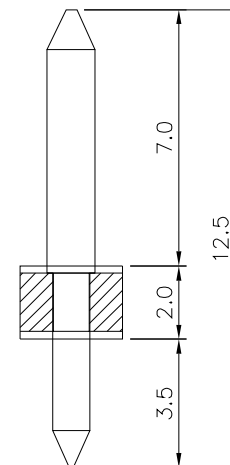
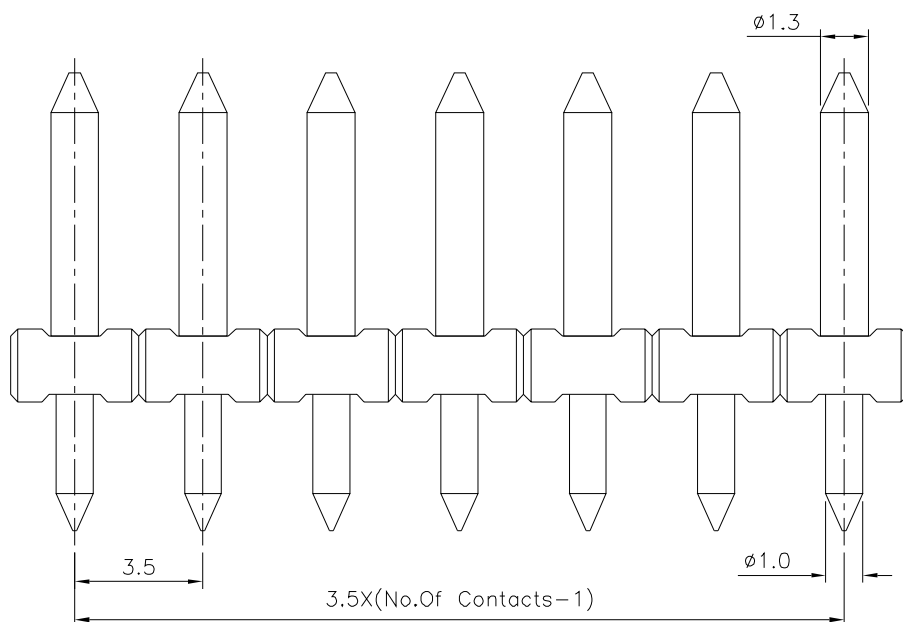


SPECIFICATION

Voltage Rating:300V AC
 Current Rating:10 Amps/Way Max.
 Withstanding Voltage:2500V AC(1Minute) Test
 Time=60 Sec/1 PCS
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:
 Test Temperature=250°C±10°C/5 Seconds Max.
 Solder Pin:Copper Alloy,Tin Plated
 Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Black
 RoHS Compliant

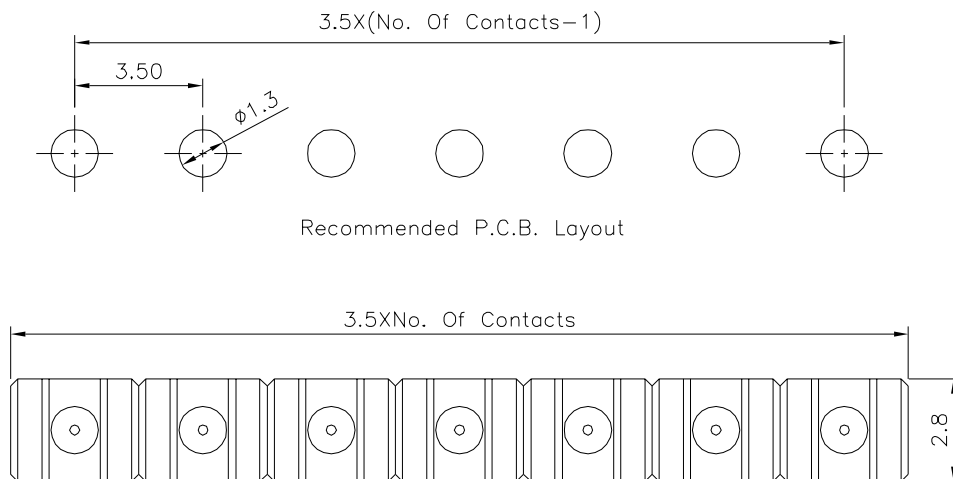

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22928

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 ANG. ±1°

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ A0

NEW RELEASE

HZF

06/05/2012