

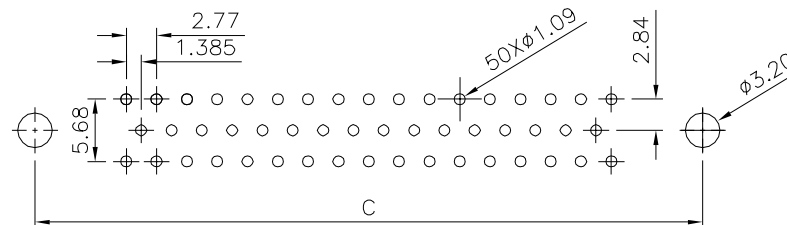

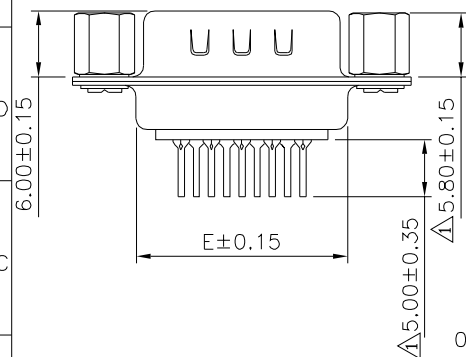


Recommended P.C.B. Layout


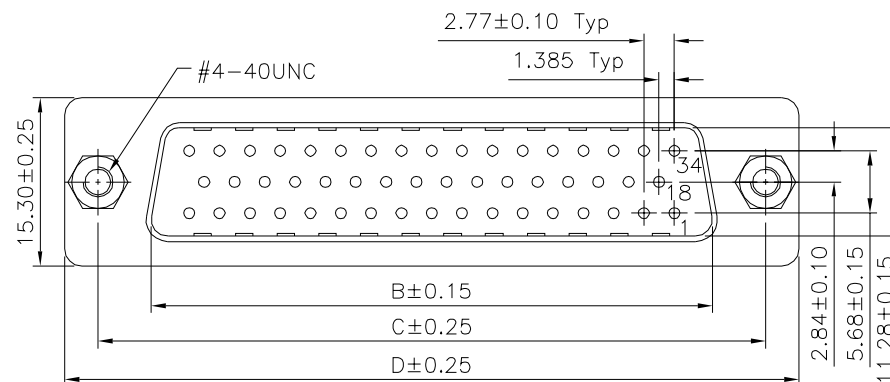


Recommended P.C.B. Layout

△ SPECIFICATION
 Current Rating:1A
 Withstanding Voltage:500V(One Minute)
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Contact Resistance:30 Milliohms Max.
 Operation Temperature:-40°C~+85°C
△ Insulator:PBT(UL94V-0),White
 Contact:Brass
 Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 Shell:Steel,Front:Nickel Plated,Rear:Tin Plated
 Nut:Brass,Nickel Plated
 RoHS Compliant

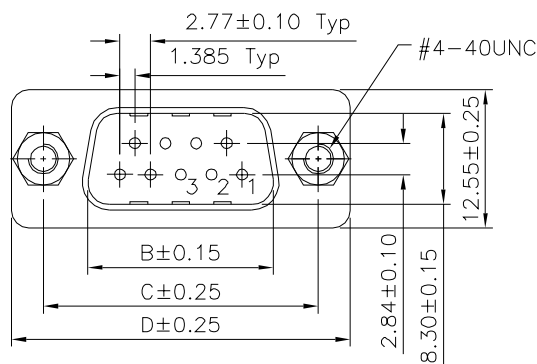

09,15,25,37 Pin

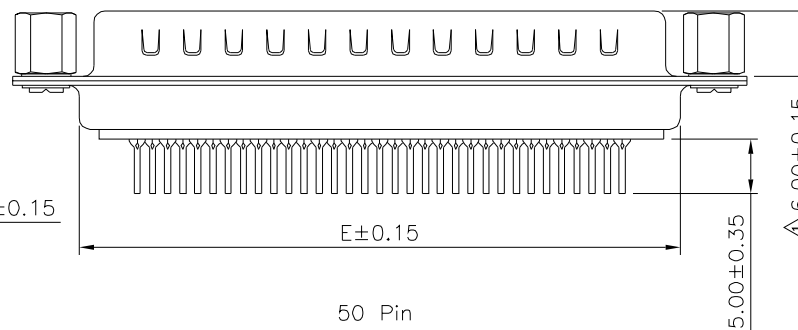

Pin	B	C	D	E
09	16.92	24.99	30.81	19.20
15	25.25	33.32	39.20	27.70
25	38.96	47.04	53.04	41.10
37	55.42	63.50	69.40	57.30
50	52.81	61.00	67.00	55.10

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22929

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

WSS

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38 .X* ±3*

.XX ±0.25 .XX* ±1*

.XXX ±0.05 .XXX* ±0.5*

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	08/16/2025
△A1		Modify Data	HZF	11/09/2020
△A0		NEW RELEASE	HZF	05/28/2011