
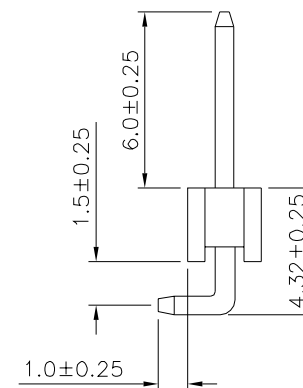
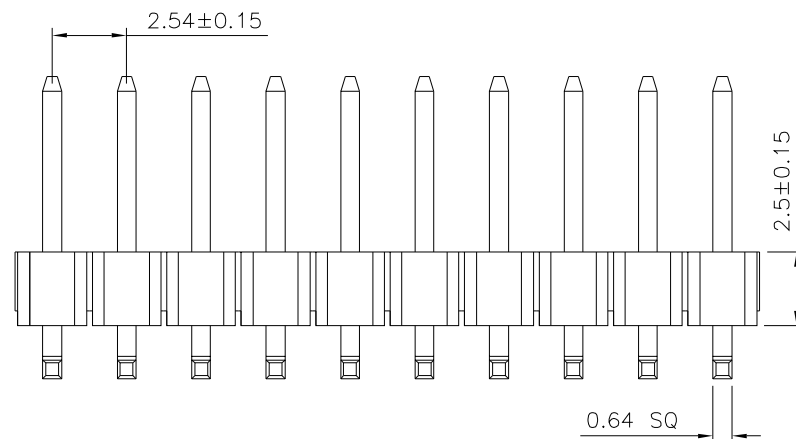


Recommended P.C.B. Board Layout

PCB Tolerance: ± 0.05 (Top View)

SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Housing:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

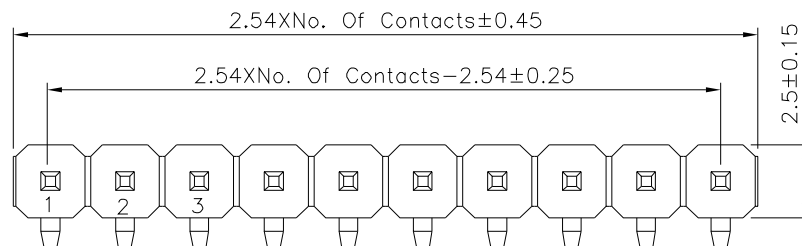

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

22931

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LSM


RFV.	
------	--

40

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.30	X. [*] $\pm 2^{\circ}$
.X ± 0.25	.X [*] $\pm 1.5^{\circ}$
.XX ± 0.20	.XX [*] $\pm 1^{\circ}$
.XXX ± 0.15	.XXX [*] $\pm 0.5^{\circ}$

	UNIT mm
--	------------



0	A0
NO.REV.	

NEW RELEASE

REVISIONS

HZF

07/08/2025

CHK

DATE