
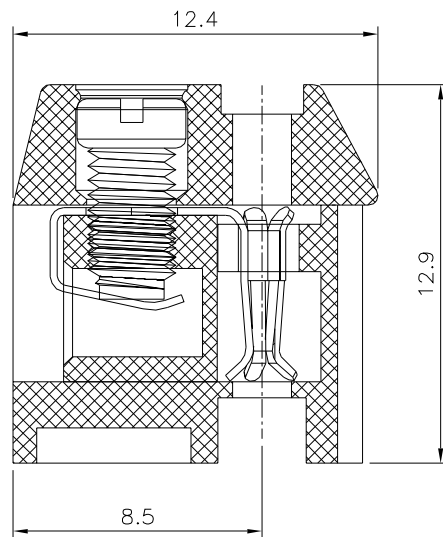
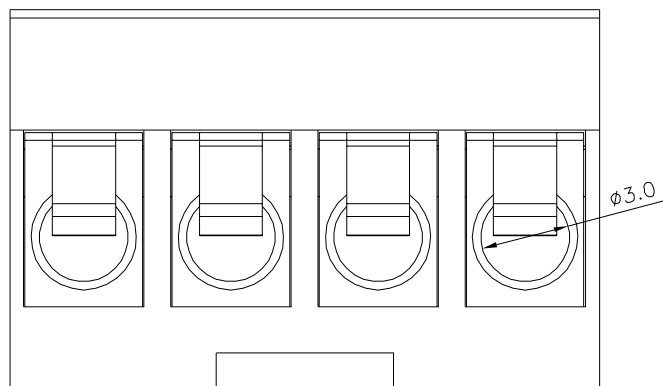


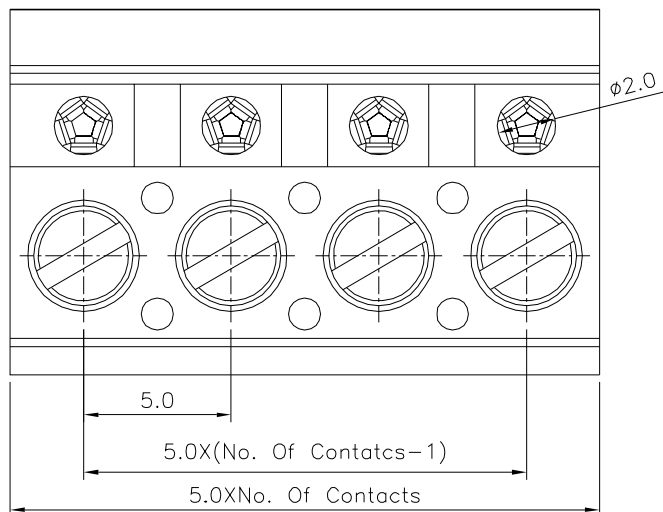

SPECIFICATION

Current Rating:10A/Way Max.
 Voltage Rating:300V AC
 Contact Resistance:20 Milliohms Max.
 Withstanding Voltage:2500V AC/Minute
 Wire Range:14~22 AWG
 Operating Temperature:-40°C~+105°C
 Torque:3.0 Kgf.cm/M4.0
 Terminal Screw:Steel,Galvanized With Cr3+ Plated
 Contact:Copper Alloy,Nickel Plated
 Wire Guard:Copper Alloy,Tin Plated
 Insulator:Polyamide(UL94V-0),Black
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 1

22935

SCALE

NONE

REV.

A2

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ± 0.50
 .X ± 0.30
 .XX ± 0.20
 ANG. $\pm 1^\circ$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
2	A2	Modify Data	HZF	03/11/2025
1	A1	Modify Data	HZF	02/18/2019
0	A0	NEW RELEASE	HZF	04/28/2014