
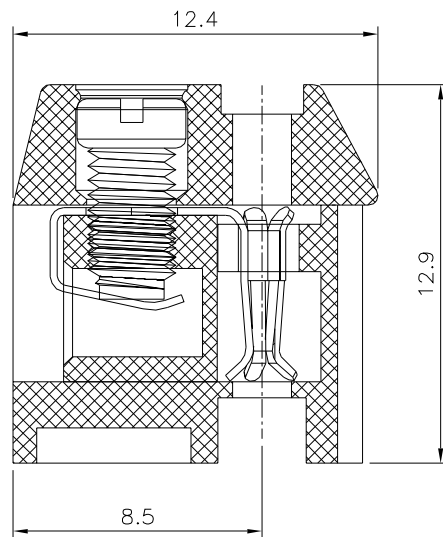
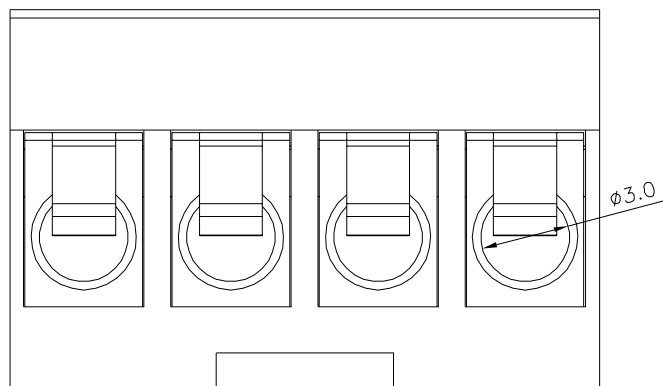


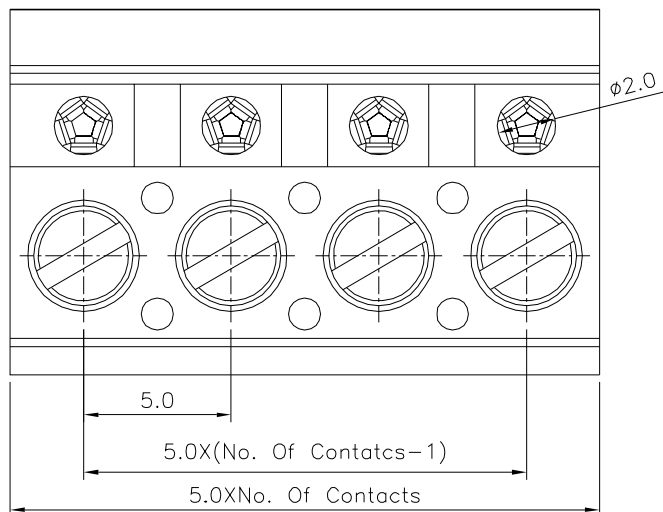

△ SPECIFICATION

Current Rating:10A/Way Max.
Voltage Rating:300V AC
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC/Minute
Wire Range:14~22 AWG
Operating Temperature:−40°C~+105°C
Torque:3.0 Kgf.cm/M4.0
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Contact:Copper Alloy,Nickel Plated
Wire Guard:Copper Alloy,Tin Plated
△ Insulator:Polyamide(UL94V−0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

22936

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE


NONE

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	03/11/2025
△1	A1	Modify Data	HZF	02/18/2019
△0	A0	NEW RELEASE	HZF	04/28/2014