
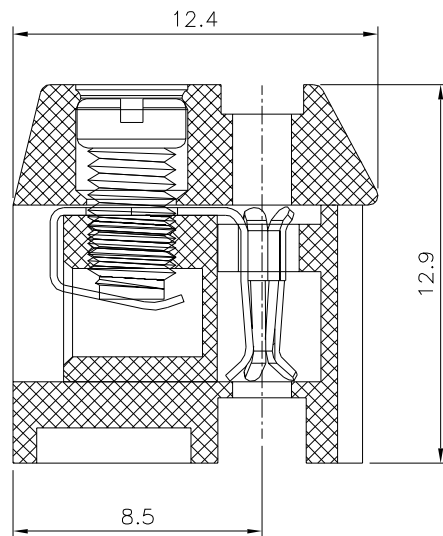
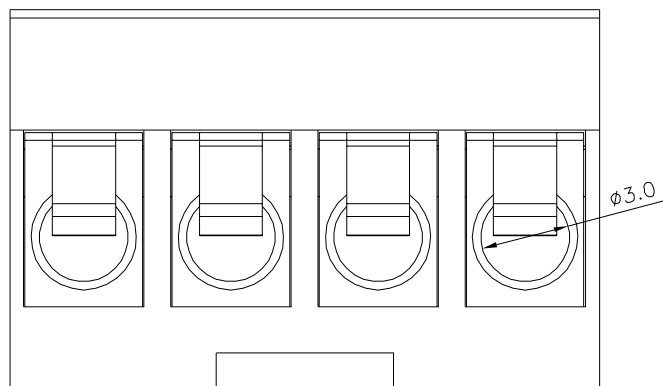


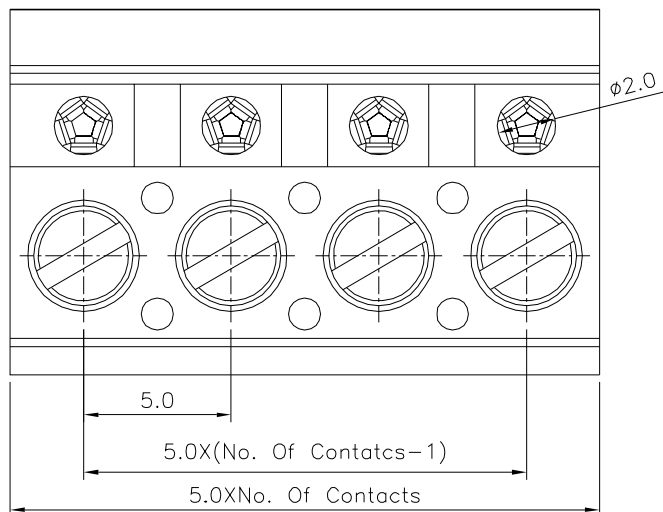

# SPECIFICATION

Current Rating:10A/Way Max.  
 Voltage Rating:300V AC  
 Contact Resistance:20 Milliohms Max.  
 Withstanding Voltage:2500V AC/Minute  
 Wire Range:14~22 AWG  
 Operating Temperature:-40°C~+105°C  
 Torque:3.0 Kgf.cm/M4.0  
 Terminal Screw:Steel,Galvanized With Cr3+ Plated  
 Contact:Copper Alloy,Nickel Plated  
 Wire Guard:Copper Alloy,Tin Plated  
 Insulator:Polyamide(UL94V-0),Black  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 1

22938

SCALE

NONE

REV.

A2

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 X.  $\pm 0.50$   
 .X  $\pm 0.30$   
 .XX  $\pm 0.20$   
 ANG.  $\pm 1^\circ$

UNIT

mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| 2   | A2   | Modify Data | HZF | 03/11/2025 |
| 1   | A1   | Modify Data | HZF | 02/18/2019 |
| 0   | A0   | NEW RELEASE | HZF | 04/28/2014 |