


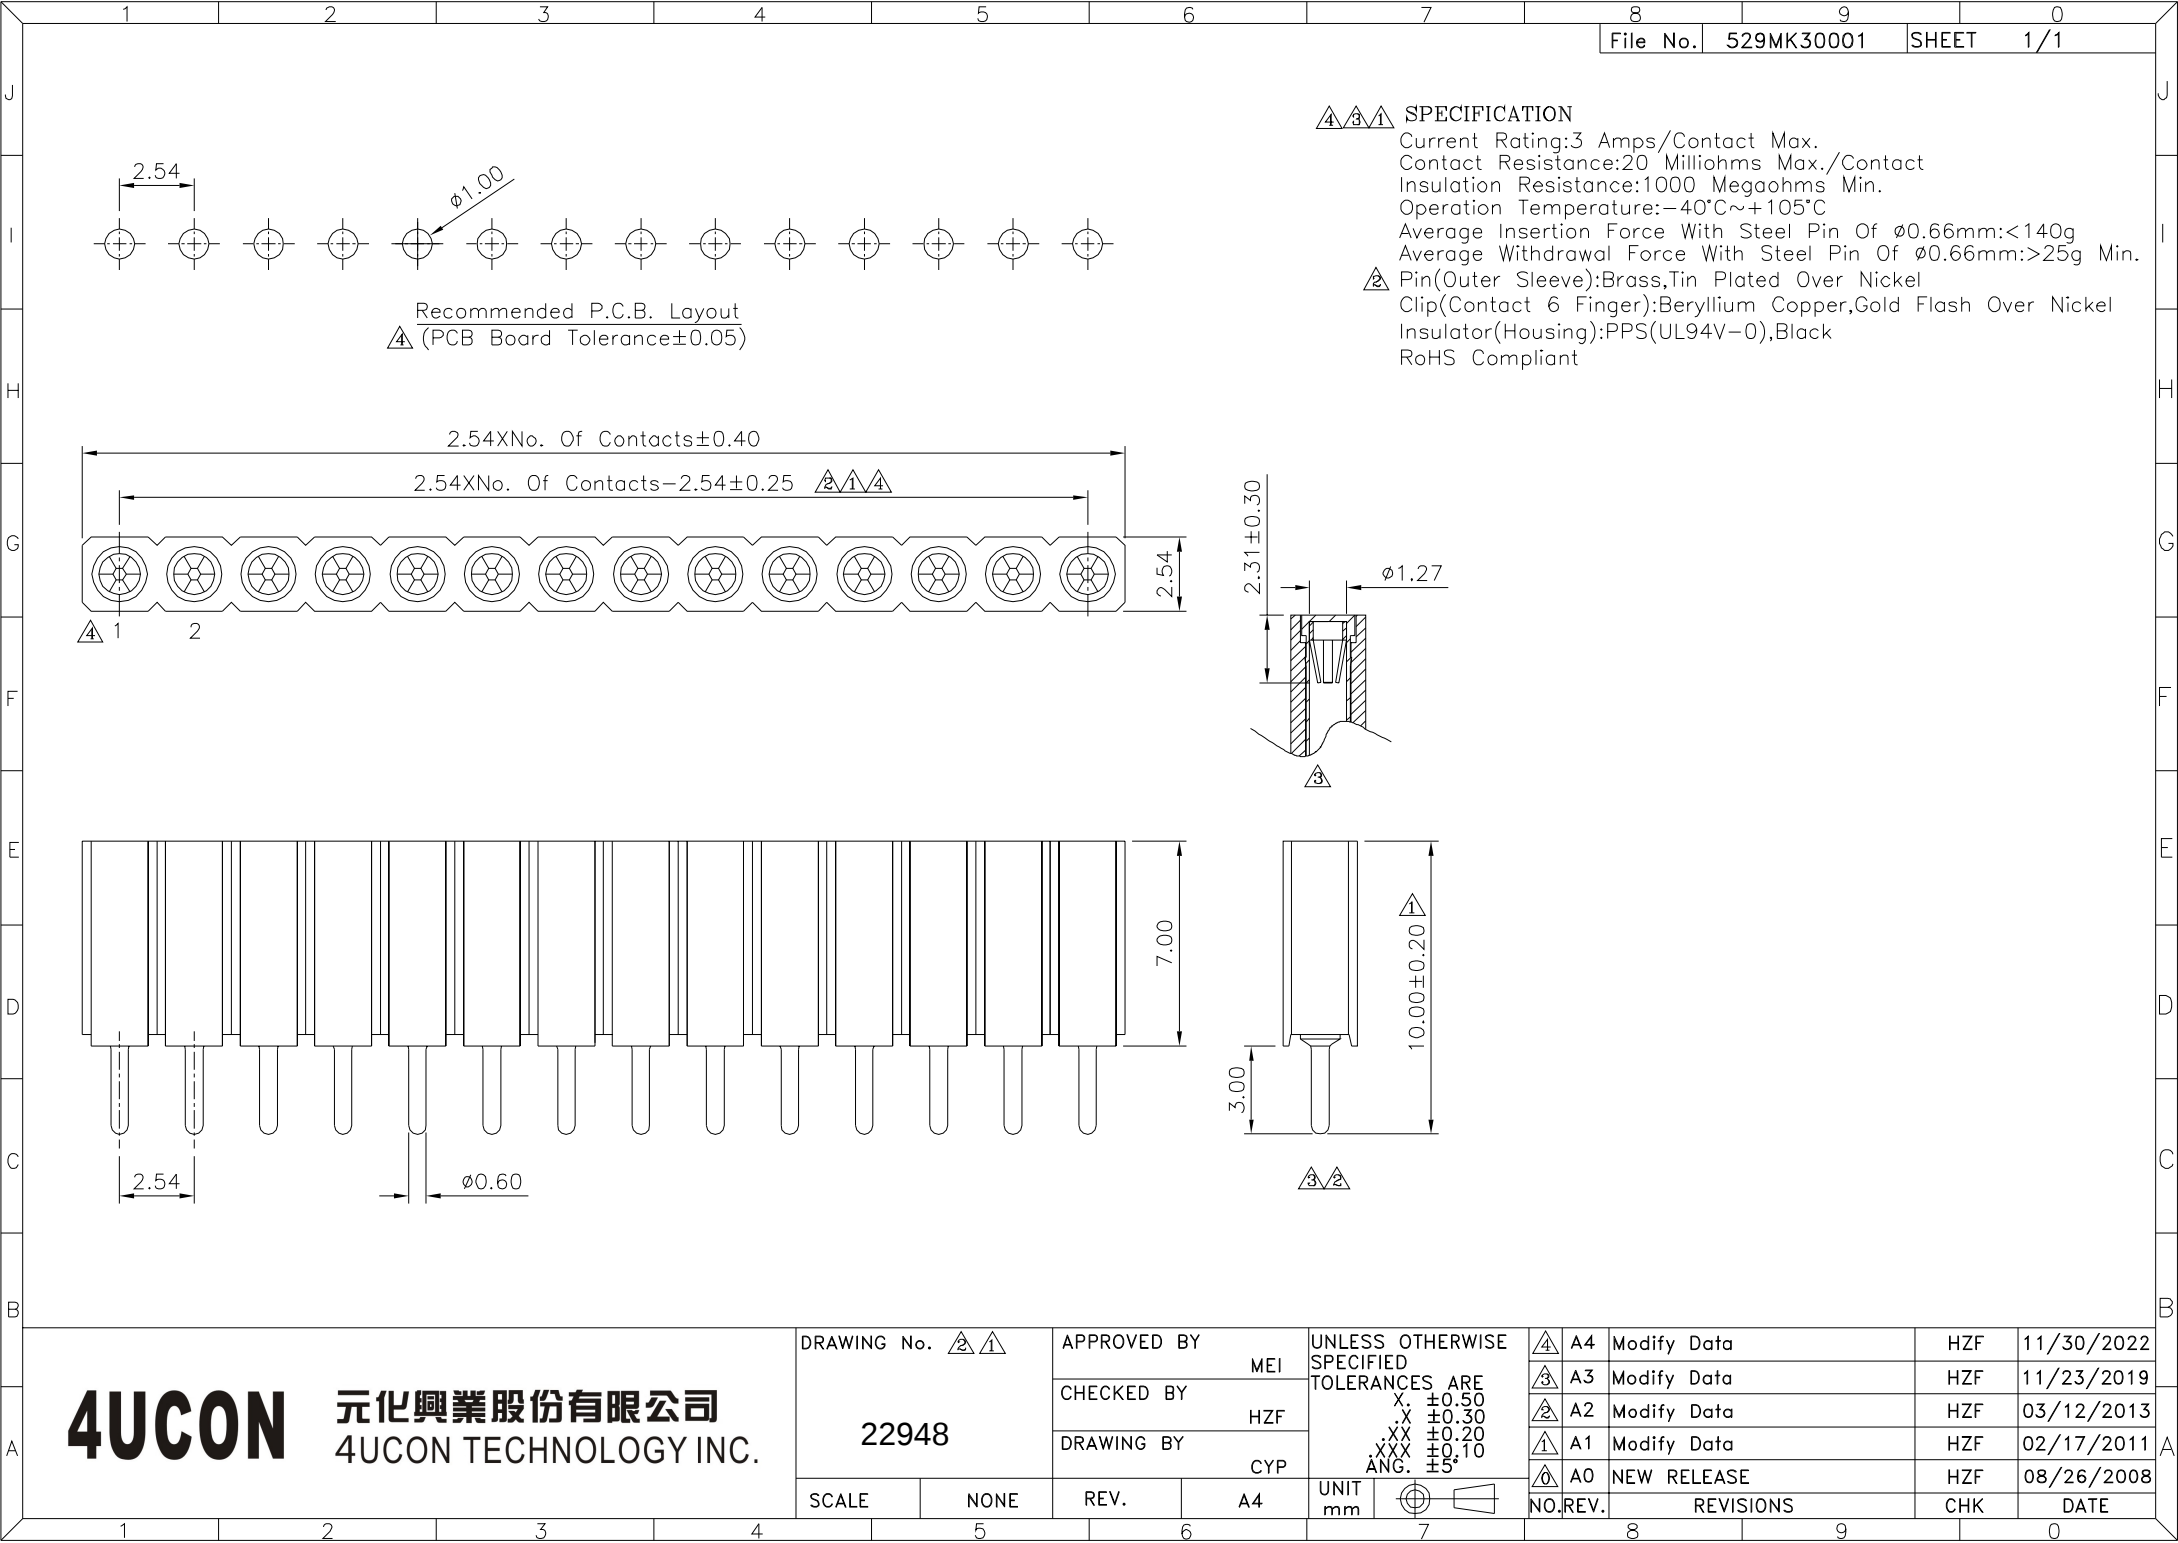

SPECIFICATION

Current Rating:3 Amps/Contact Max.
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Average Insertion Force With Steel Pin Of $\phi 0.66$ mm:<140g
Average Withdrawal Force With Steel Pin Of $\phi 0.66$ mm:>25g Min.

Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
Clip(Contact 6 Finger):Beryllium Copper,Gold Flash Over Nickel
Insulator(Housing):PPS(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 22948		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ± 0.50 .X ± 0.30 .XX ± 0.20 XXX ± 0.10 ANG. $\pm 5^\circ$		A4	Modify Data	HZF	11/30/2022
		MEI				A3	Modify Data	HZF	11/23/2019
		CHECKED BY				A2	Modify Data	HZF	03/12/2013
		HZF				A1	Modify Data	HZF	02/17/2011
SCALE		REV.		A4	UNIT mm	A0	NEW RELEASE	HZF	08/26/2008
		NONE				NO.REV.	REVISIONS	CHK	DATE