
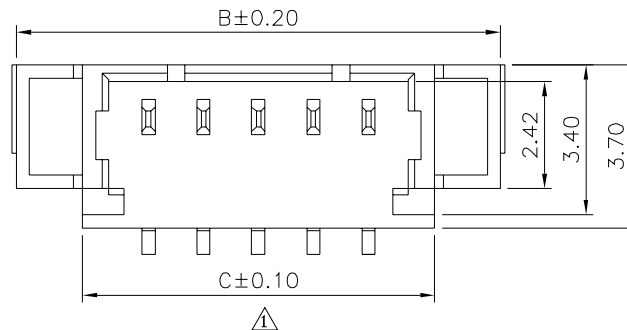
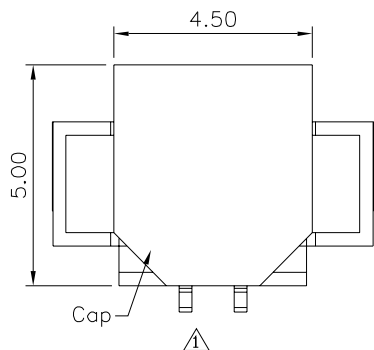
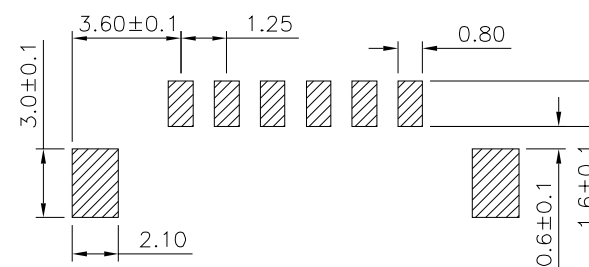
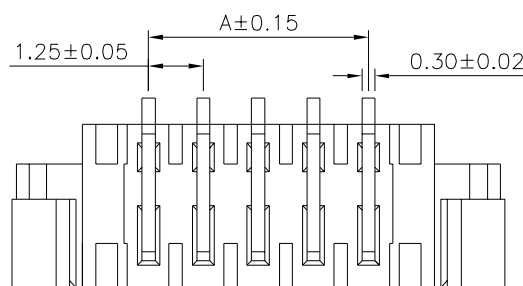
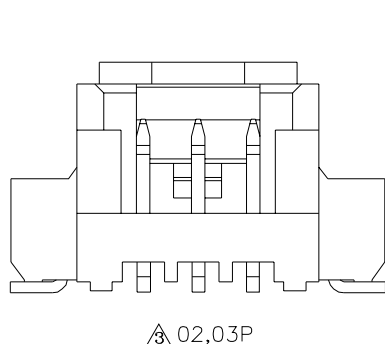
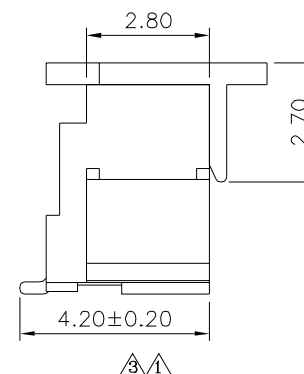


Section A-A

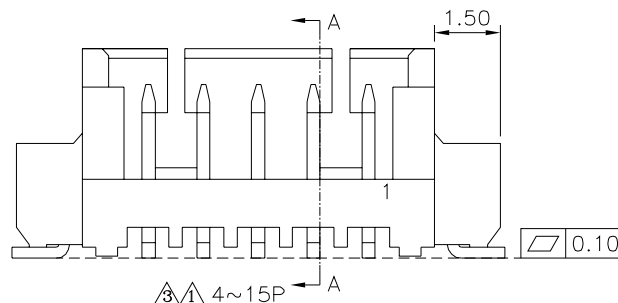

Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ±0.05)

SPECIFICATION

Current Rating: 1.0A AC/DC
Voltage Rating: 125V AC/DC
Contact Resistance: 20 Milliohms Max.
Withstanding Voltage: 250V AC/Minute
Insulation Resistance: 100 Megaohms Min.
Temperature Range: -25°C ~ +85°C
Insulator: PA46 (UL94V-0), Nature
Pin: Phosphor Bronze, Tin Plated Over Nickel
Solder Tab: Brass, Tin Plated Over Nickel
RoHS Compliant

Pin	A	B	C
02	1.25	7.25	4.25
03	2.50	8.50	5.50
04	3.75	9.75	6.75
05	5.00	11.00	8.00
06	6.25	12.25	9.25
07	7.50	13.50	10.50
08	8.75	14.75	11.75
09	10.00	16.00	13.00
10	11.25	17.25	14.25
11	12.50	18.50	15.50
12	13.75	19.75	16.75
13	15.00	21.00	18.00
14	16.25	22.25	19.25
15	17.50	23.50	20.50

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22955

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A3

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

X. ±0.30




.X ±0.25

.XX ±0.20

.XXX ±0.05

ANG. ±1°

UNIT mm



NO. REV.

REVISIONS

CHK

DATE

A3

Modify Data

HZF

07/22/2023

A2

Modify Data

HZF

10/13/2020

A1

Modify Data

HZF

03/20/2020

A0

NEW RELEASE

HZF

12/30/2015