


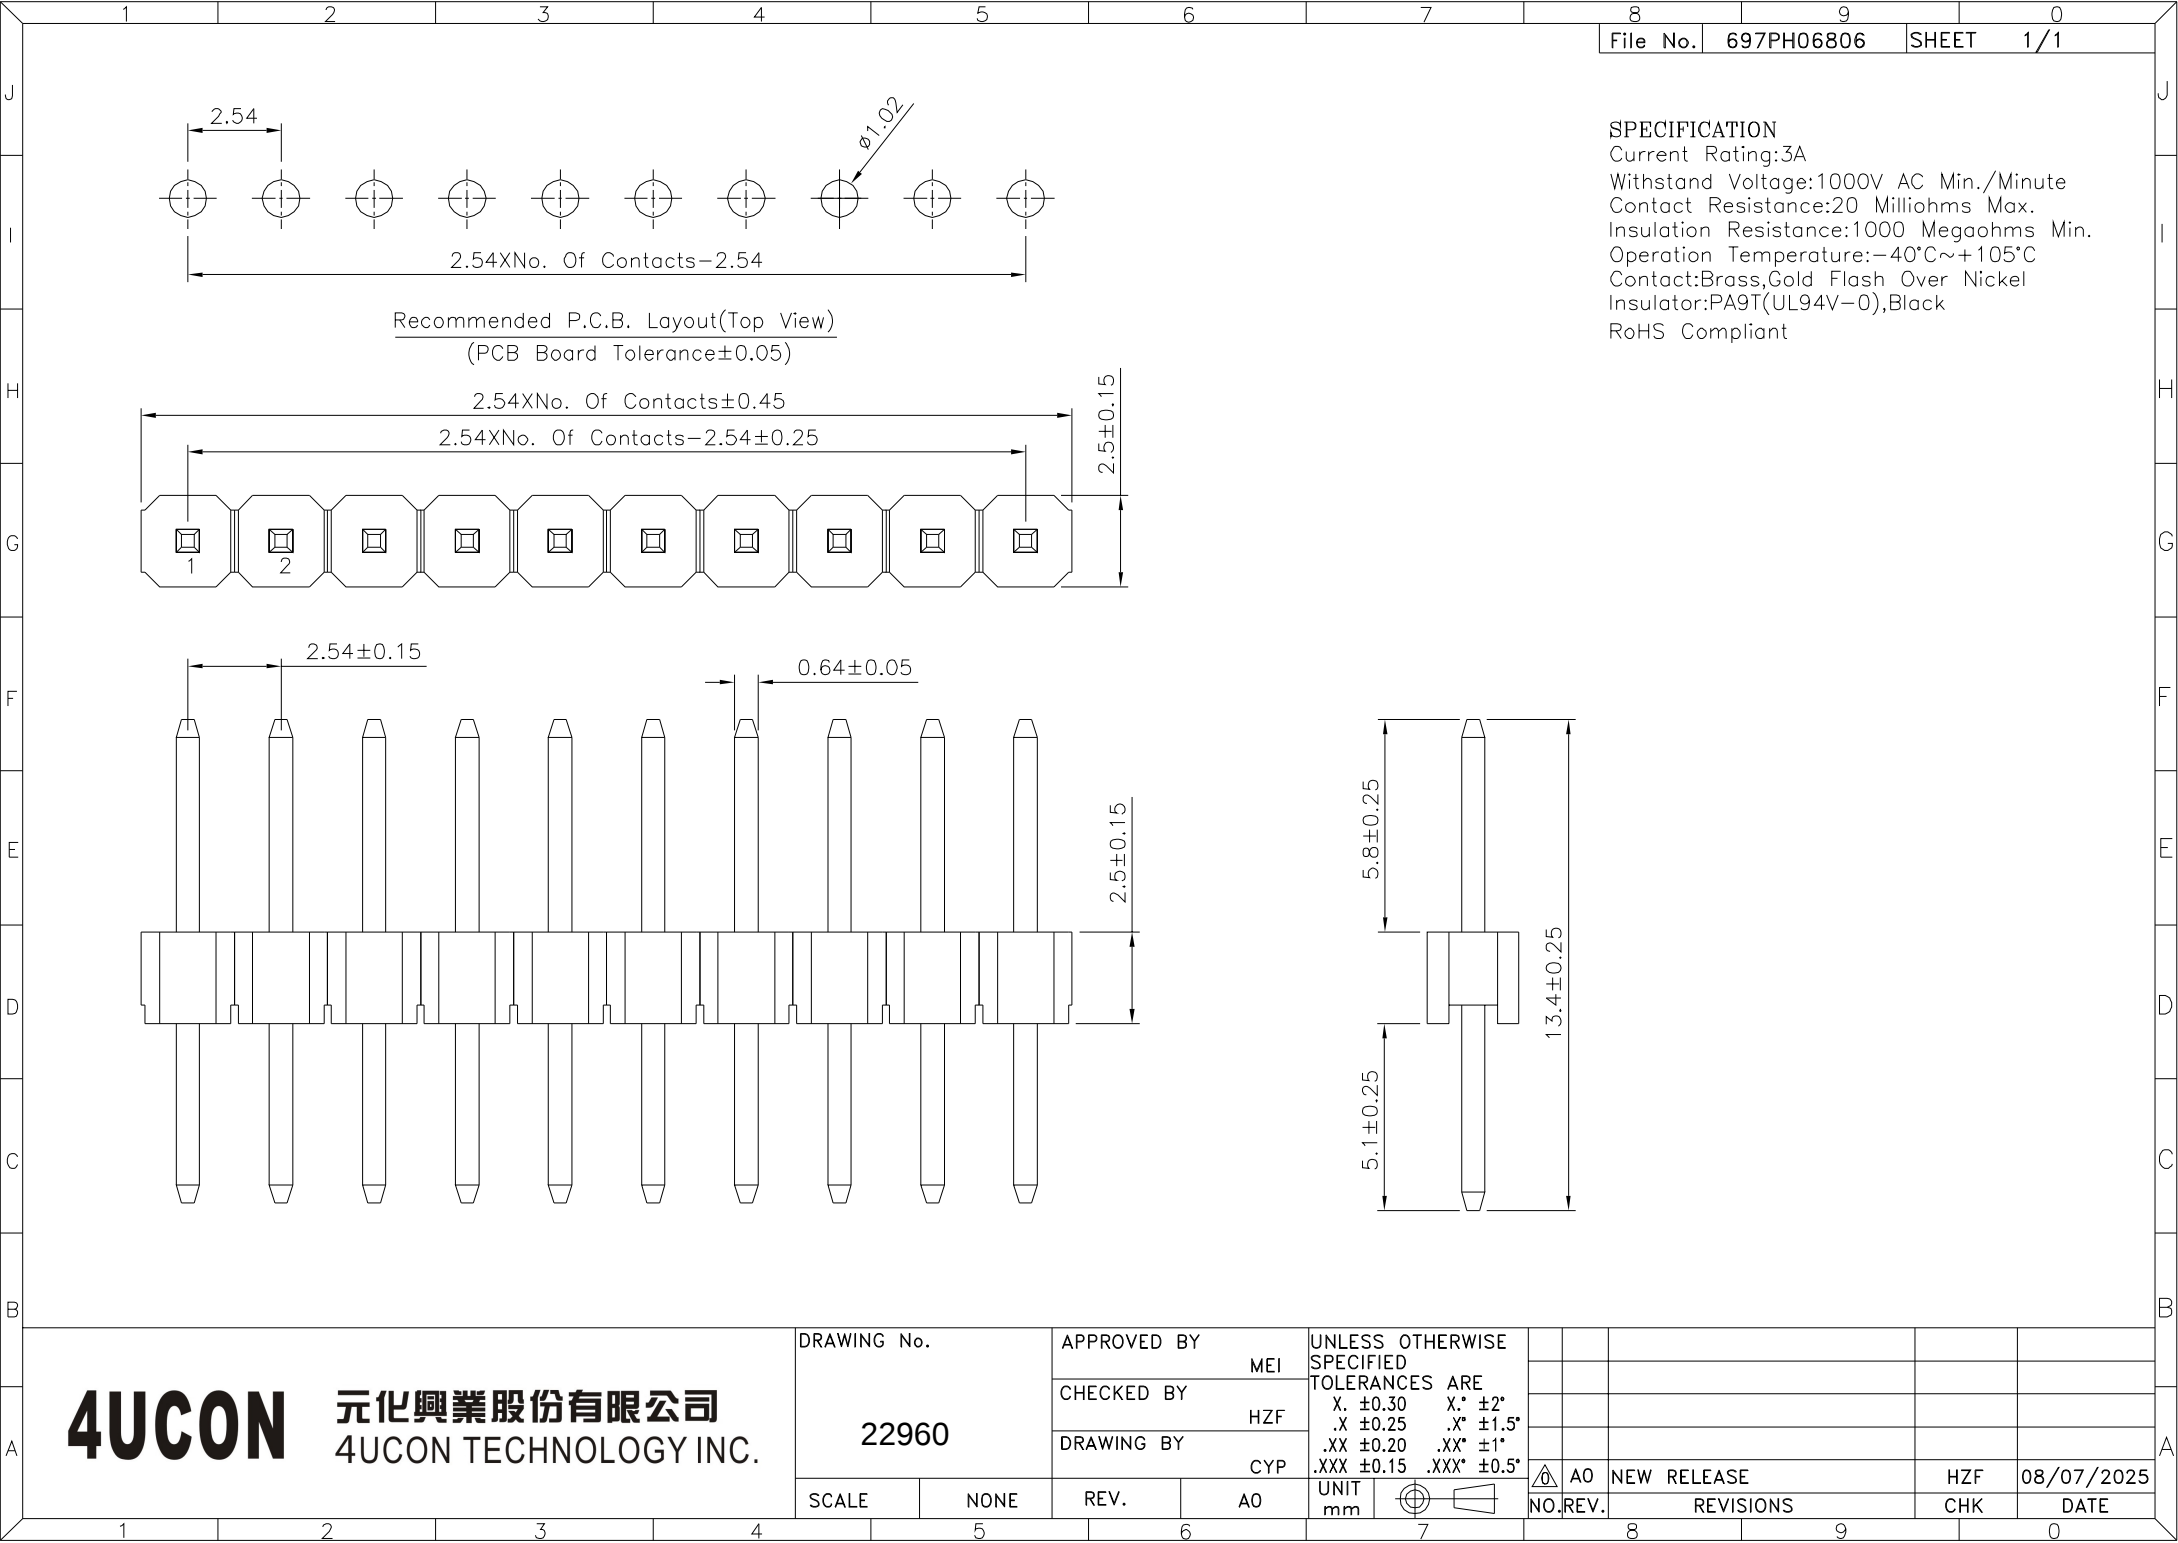

SPECIFICATION
Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA9T(UL94V-0),Black
RoHS Compliant

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22960

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE

NONE


REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.30 X.* ±2°
.X ±0.25 .X* ±1.5°
.XX ±0.20 .XX* ±1°
.XXX ±0.15 .XXX* ±0.5°

UNIT
mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

08/07/2025

DATE