

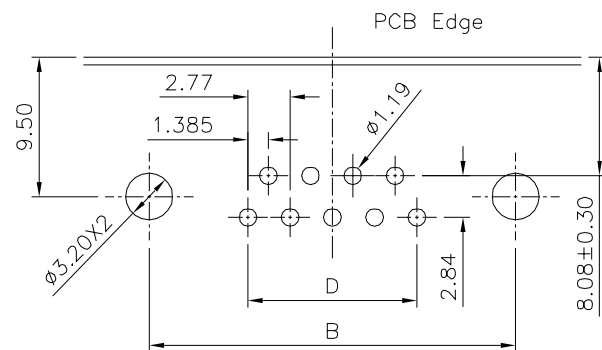
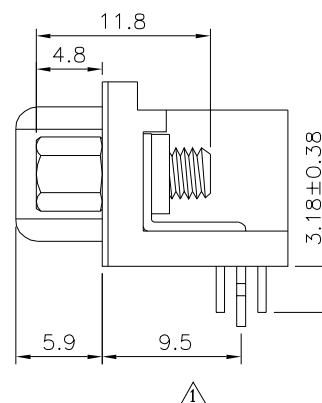


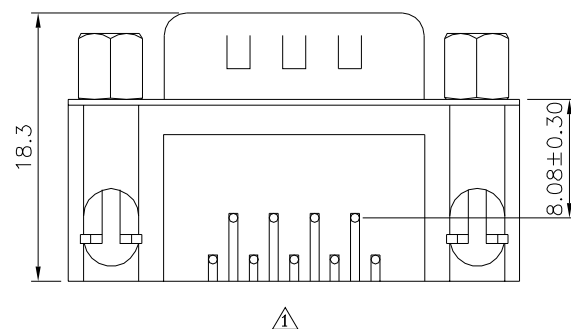

△ Recommended P.C.B. Layout

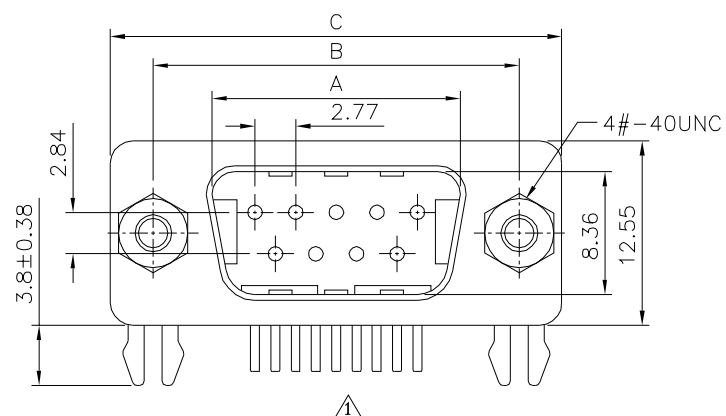

△ SPECIFICATION

Current Rating:1.5A Max.
Voltage Rating:500V AC/DC
Insulation Resistance:1000 Megohms Min. At 500V DC
For 1 Minute
Dielectric Withstanding Voltage:500V AC/Minute
Contact Resistance:30 Milliohms Max.At 20mV Max. 50mA
Operating Temperature:-55°C~+105°C
Insulator:PBT+30%G.F.(UL94V-0),Black
Contact:Brass,Gold Plated On Contact Area,Tin
Plated On Solder Tails,Over Nickel
Shell:SPCC,Nickel Plated Over All
Rivet:SPCC,Tin Plated On Solder Tails,Over Nickel
Screw:Brass,Nickel Plated Over All
RoHS Compliant

Pin	A $\pm$ 0.20	B $\pm$ 0.25	C $\pm$ 0.38	D
9	16.92	24.99	30.80	11.08
15	25.25	33.32	39.10	19.39
25	38.96	47.04	53.00	33.24
37	55.42	63.50	69.32	49.86

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22966

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X	±0.25
.XX	±0.15
.XXX	±0.05
ANG	±2°

UNIT	mm
------	----



	1	

A1

Modify Data

HZF

03/27/2018

	0	

ΔΩ

NEW RELEASE

H7F

10/16/2006

NO.	REV.
-----	------

REVISIONS

CHK

10/10/2	DATE
---------	------