
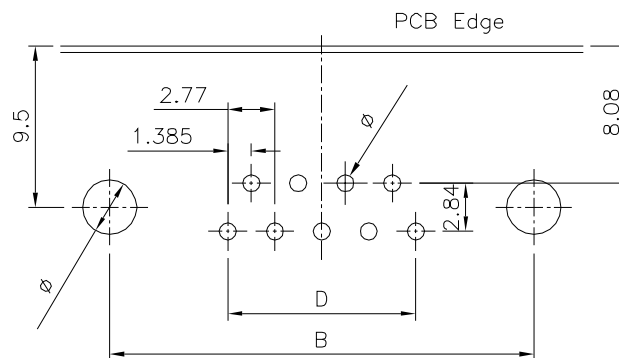
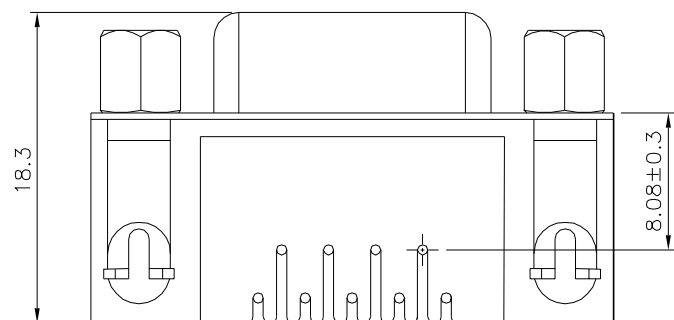



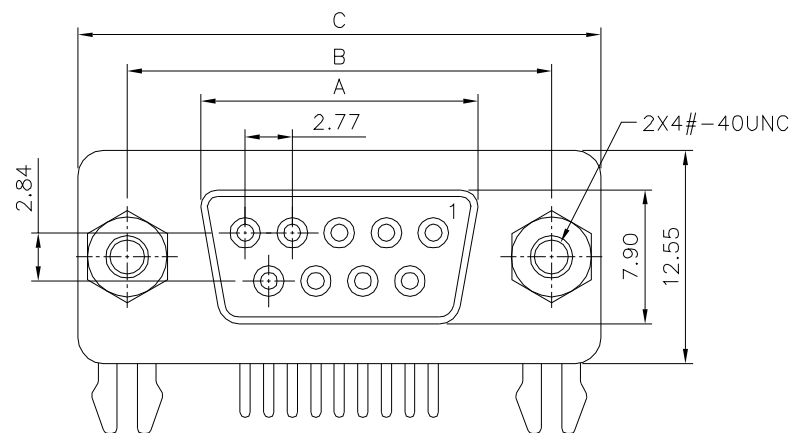

△ SPECIFICATION

Current Rating:5 Amp
 Dielectric Withstanding Voltage:1000V AC Per Minute
 Insulation Resistance:1000 Megaohms Min. At 500V DC
 Contact Resistance:30 Milliohms Max. 10 Sec.
 Operation Temperature:-55°C~+105°C
 Insulator:PBT+25%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 Shell:SPCC,Nickel Plated
 Grounding Bracket:SPCC,Tin Plated
 Riveted Insert:Brass,Tin Plated
 Jack Screws:SPCC,Nickel Plated
 RoHS Compliant

Pin	A±0.20	B±0.25	C±0.38	D
9	16.33	24.99	30.80	11.08
15	24.66	33.32	39.10	19.39
25	38.38	47.04	53.00	33.24
37	54.84	63.50	69.32	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △

22968

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 △ .X ±0.38
 .XX ±0.30
 .XXX ±0.05
 ANG ±1°

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	12/05/2019
△ A0		NEW RELEASE	SHIN	02/20/2007