
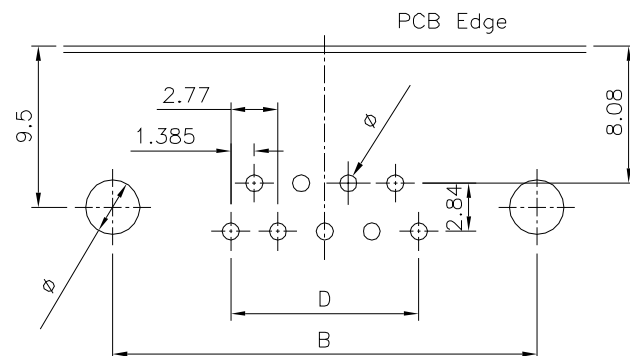
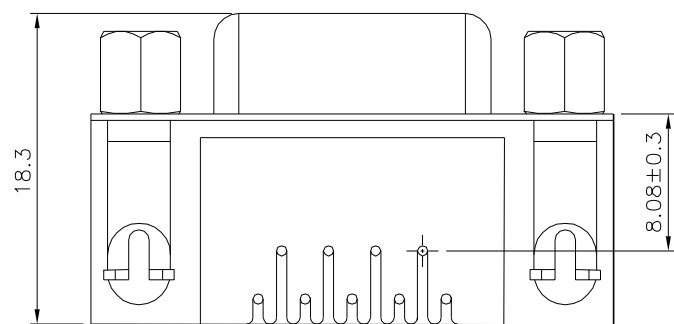
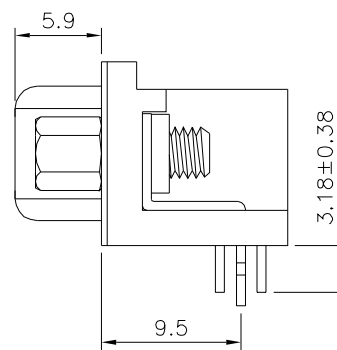


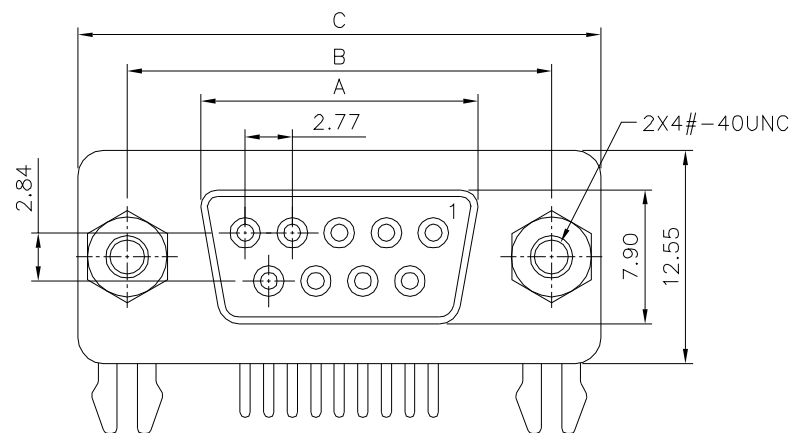

# △ SPECIFICATION

Current Rating:5 Amp  
 Dielectric Withstanding Voltage:1000V AC Per Minute  
 Insulation Resistance:1000 Megaohms Min. At 500V DC  
 Contact Resistance:30 Milliohms Max. 10 Sec.  
 Operation Temperature:-55°C~+105°C  
 Insulator:PBT+25%G.F.(UL94V-0),Black  
 Contact:Brass,Gold Flash On Contact Area,Tin  
 Plated On Solder Tails,Over Nickel  
 Shell:SPCC,Nickel Plated  
 Grounding Bracket:SPCC,Tin Plated  
 Riveted Insert:Brass,Tin Plated  
 Jack Screws:SPCC,Nickel Plated  
 RoHS Compliant

| Pin | A±0.20 | B±0.25 | C±0.38 | D     |
|-----|--------|--------|--------|-------|
| 9   | 16.33  | 24.99  | 30.80  | 11.08 |
| 15  | 24.66  | 33.32  | 39.10  | 19.39 |
| 25  | 38.38  | 47.04  | 53.00  | 33.24 |
| 37  | 54.84  | 63.50  | 69.32  | 49.86 |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △

22970

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 △ .X ±0.38  
 .XX ±0.30  
 .XXX ±0.05  
 ANG ±1°


SCALE

NONE

REV.

A1

UNIT  
 mm



| NO.  | REV.        | REVISIONS | CHK        | DATE |
|------|-------------|-----------|------------|------|
| △ A1 | Modify Data | HZF       | 12/05/2019 |      |
| △ A0 | NEW RELEASE | SHIN      | 02/20/2007 |      |