


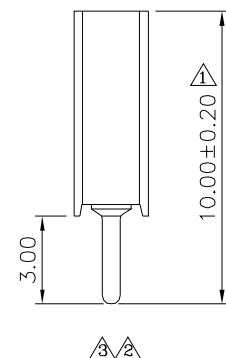
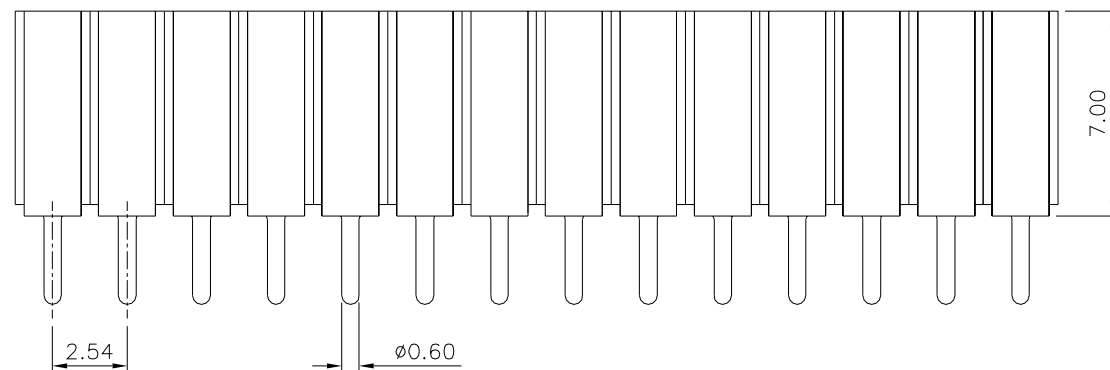


△△△ SPECIFICATION

Current Rating:3 Amps/Contact Max.
 Contact Resistance:20 Milliohms Max./Contact
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Average Insertion Force With Steel Pin Of $\phi 0.66\text{mm}$:<140g
 Average Withdrawal Force With Steel Pin Of $\phi 0.66\text{mm}$:>25g Min.
 △ Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
 Clip(Contact 6 Finger):Beryllium Copper,Gold Flash Over Nickel
 Insulator(Housing):PPS(UL94V-0),Black
 RoHS Compliant



Recommended P.C.B. Layout
 △ (PCB Board Tolerance ± 0.05)

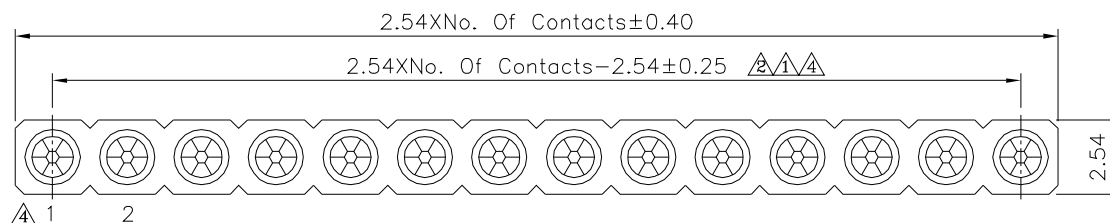

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △△

22993

APPROVED BY
 MEI

CHECKED BY
 HZF

DRAWING BY
 CYP

SCALE

NONE

REV.

A4

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X: ± 0.50
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG. $\pm 5^\circ$

UNIT
 mm



△ A4	Modify Data	HZF	11/30/2022
△ A3	Modify Data	HZF	11/23/2019
△ A2	Modify Data	HZF	03/12/2013
△ A1	Modify Data	HZF	02/17/2011
△ A0	NEW RELEASE	HZF	08/26/2008
NO. REV.	REVISIONS	CHK	DATE