

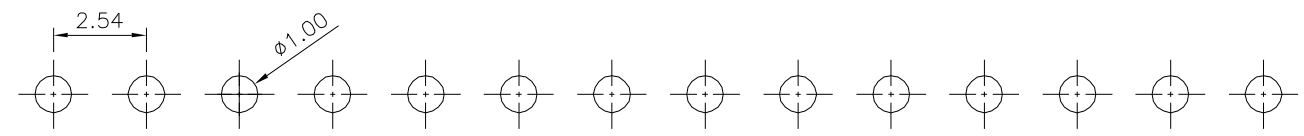



△ SPECIFICATION
 Current Rating:3A/Contact Max.
 Contact Resistance:20 Milliohms/Contact Max.
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operating Voltage:60V AC/DC
 Operating Temperature:-40°C~+105°C
 Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
 Clip(Contact 6 Finger):Beryllium Copper
 Gold Flash Over Nickel
 Insulator(Housing):PPS(UL94V-0),Black
 RoHS Compliant

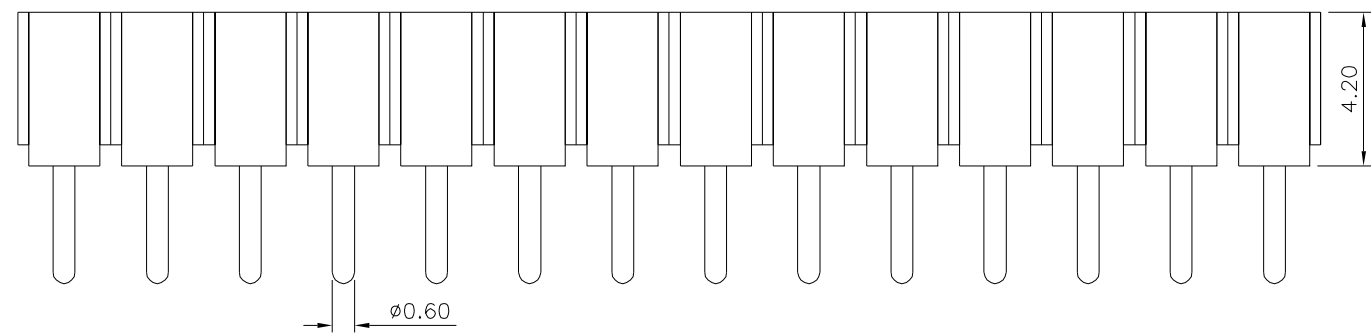

Recommended P.C.B. Layout
 △ Tolerance ±0.05

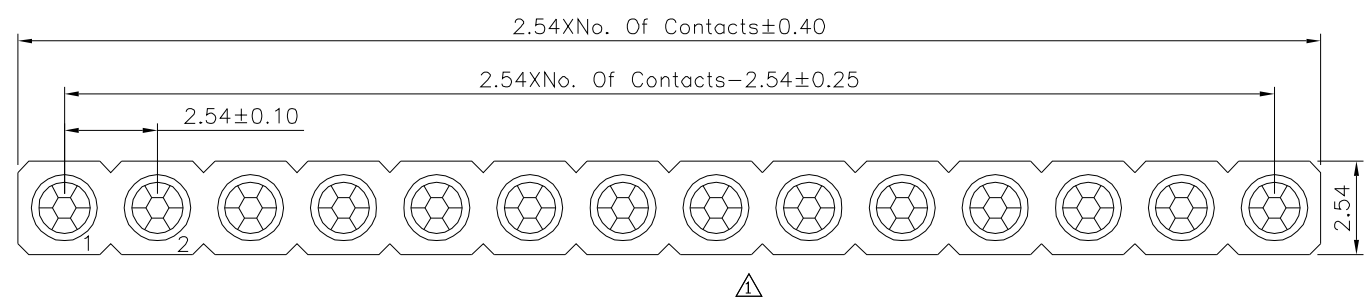

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 XX ±0.30 XXX ±0.20 .XXX ±0.10 ANG. ±5°
22994		Jason Wu		
		CHECKED BY		
		Leo Han		
		DRAWING BY		UNIT
		Michelle Lee		
SCALE	NONE	REV.	A1	

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	04/15/2026
△ A0		NEW RELEASE	HZF	01/20/2016