
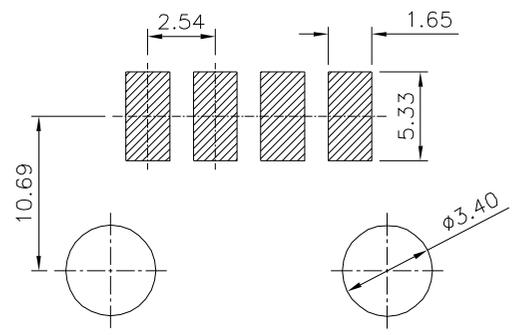
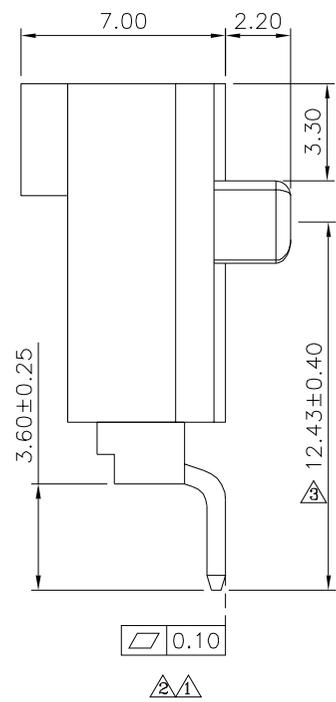
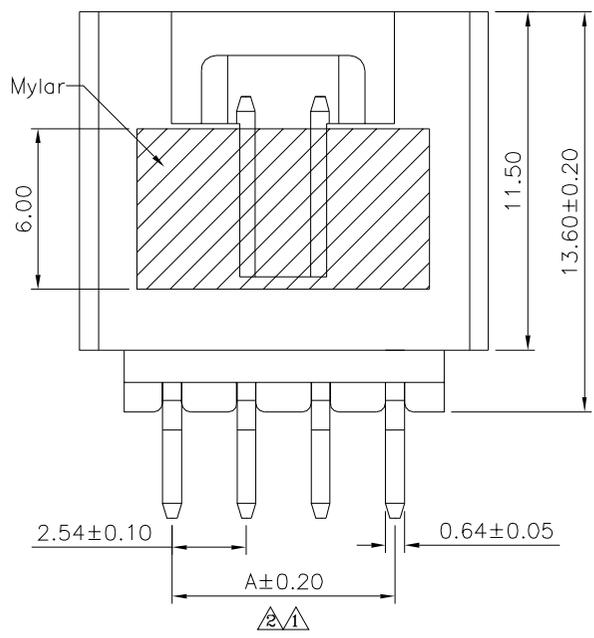




SPECIFICATION

Current Rating: 3A AC/DC
 Voltage Rating: 250V AC/DC
 Withstanding Voltage: 1500V AC/Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Temperature Range: -25°C ~ +85°C
 Insulator: PA9T(UL94V-0), Black
 Contact: Brass, Gold Flash Over All, Over Nickel
 RoHS Compliant

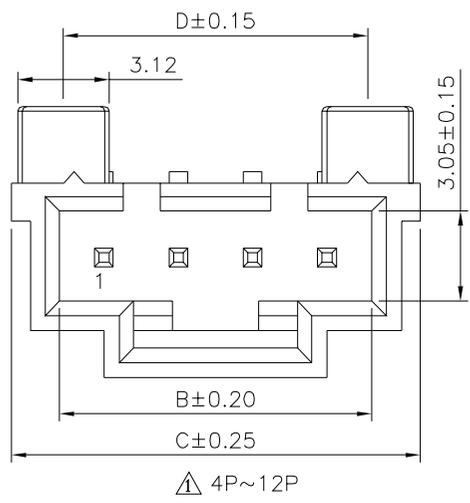

Recommended P.C.B. Layout

Pin	A	B	C	D
2	2.54	5.58	8.89	5.33
3	5.08	8.13	11.43	7.87
4	7.62	10.67	13.97	10.41
5	10.16	13.21	16.51	12.95
6	12.70	15.75	19.05	15.49
7	15.24	18.29	21.59	18.03
8	17.78	20.83	24.13	20.57
9	20.32	23.37	26.67	23.11
10	22.86	25.91	29.21	25.65
11	25.40	28.45	31.75	28.19
12	27.94	30.99	34.29	30.73

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 23004

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.30
 .X ±0.25
 .XX ±0.20
 .XXX ±0.05
 ANG. ±1°

SCALE NONE

REV. A3

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
A3		Modify Data	HZF	11/05/2025
A2		Modify Data	HZF	10/13/2023
A1		Modify Data	HZF	06/27/2016
A0		NEW RELEASE	HZF	05/09/2012