
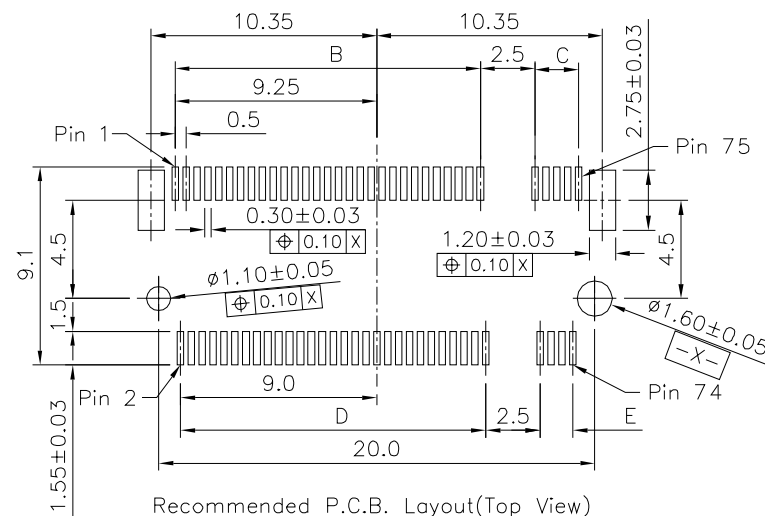

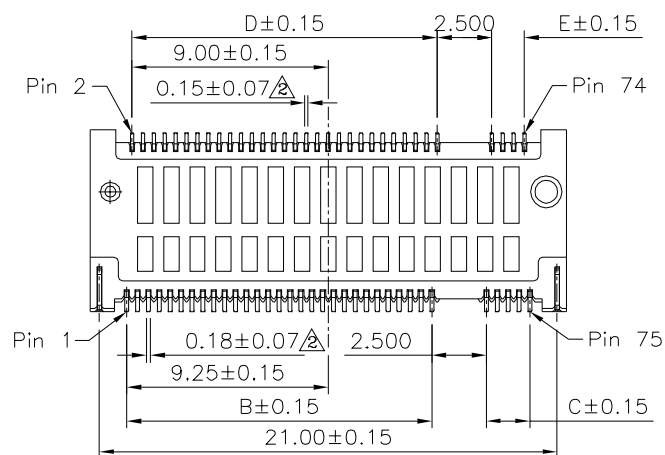
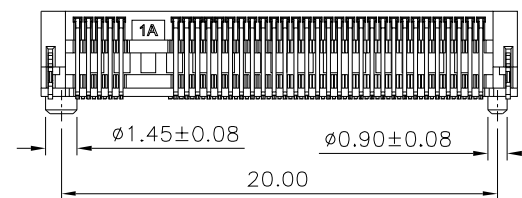

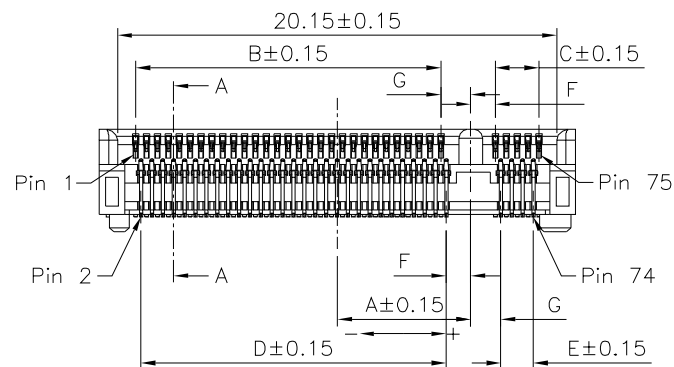
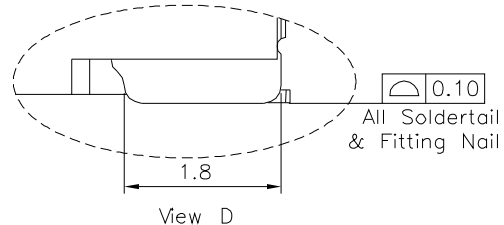


Current:0.5A/Pin
Voltage:50V AC/Pin
Withstanding Voltage:300V AC Min. For 1 Minute
Insulator Resistance:500 Megaohms Min.
Contact Resistance:Initial:55 Milliohms Max./Pin
Final:20 Milliohms Max.
Operating Temperature:-40°C~+80°C
Housing:LCP(UL94V-0),Black
Contact:Phosphor Bronze,Gold Plated On Contact Area,
Gold Flash On Solder Tails,Over Nickel
Fitting Nail:Brass,Tin Plated On Solder Area,Over Nickel
RoHS Compliant

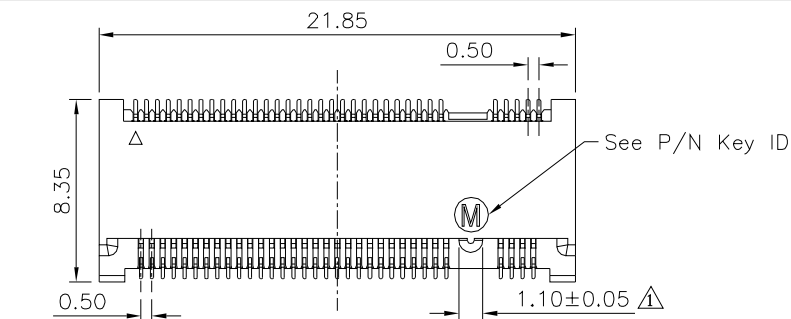

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

23016

MEI

HZF


LSM

NONE

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.40
.X	± 0.30
.XX	± 0.20
.XXX	± 0.10



△U	AS
NO	REV

REVISIONS


	114
	CH

05/14/2	DATE
---------	------


2	A2	Modify Data	HZF	07/07/2025
---	----	-------------	-----	------------

⬆	A1	Modify Data	HZF	10/11/2024
---	----	-------------	-----	------------


0	A0	NEW RELEASE	HZF	03/14/2024
---	----	-------------	-----	------------

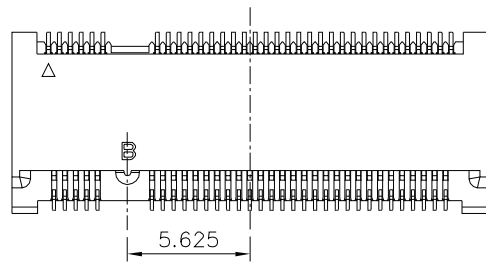

B TYPE



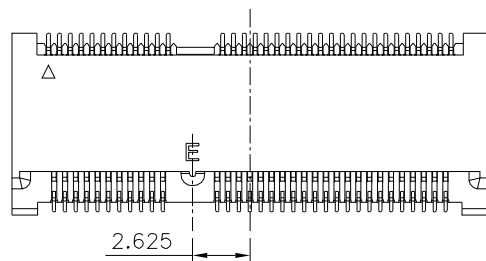


E TYPE

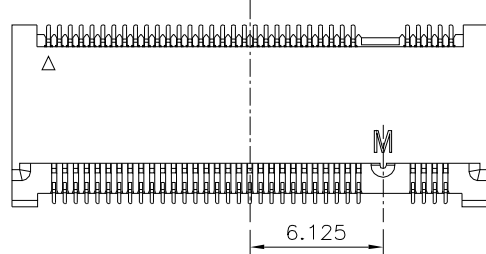

M TYPE

Item No.	Key ID	A	B	C	D	E	F	G
--	B	-5.625	2.5	13.5	2.0	13.5	1.375	1.125
22759	E	-2.625	5.5	10.5	5.0	10.5	1.375	1.125
23016	M	6.125	14.0	2.0	14.0	1.5	1.125	1.375

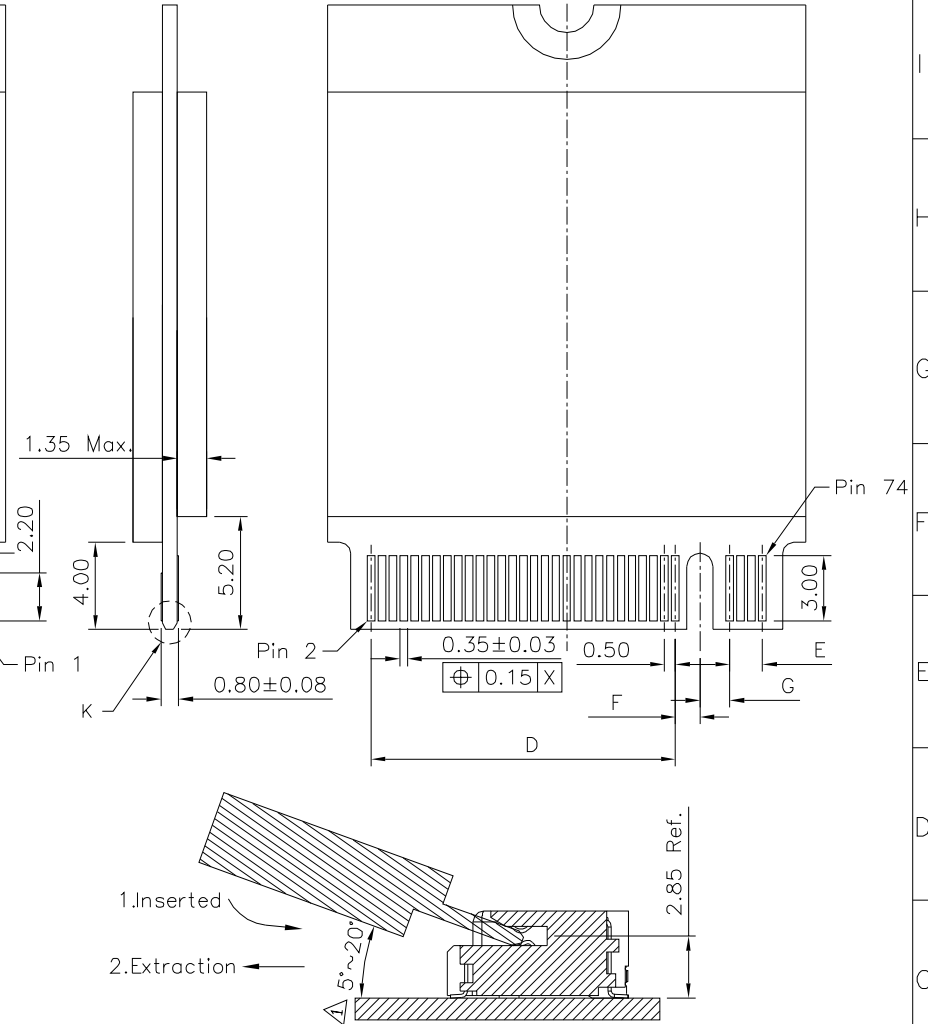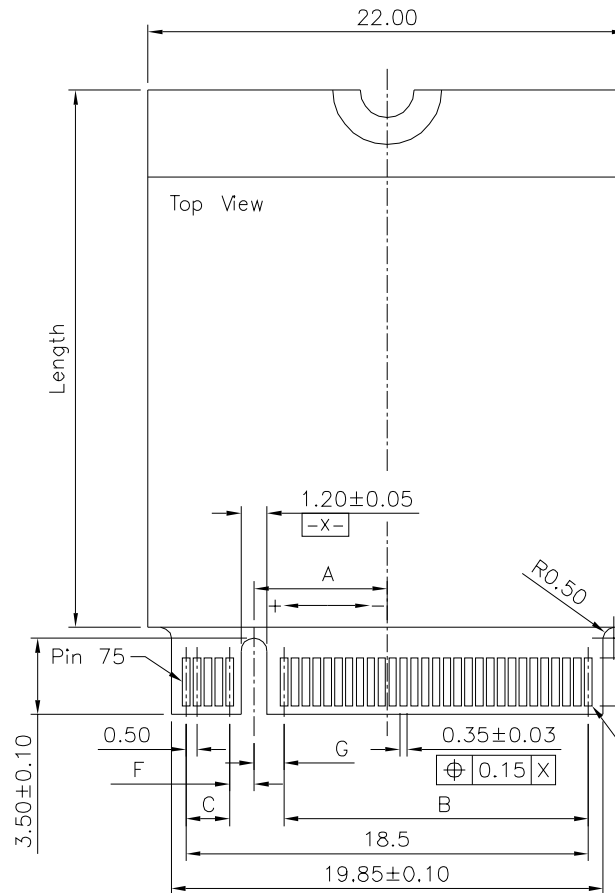

Recommended Operating Flow:
Mate:1
Unmate:2

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

23016

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LSM

REV.

A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	X. ± 0.40
	.X ± 0.30
	.XX ± 0.20
	.XXX ± 0.10

UNIT	mm
------	----



NO.	REV.
-----	------

REVISIONS

FILE	
CHK	

DATE _____

$\triangle 2$	A2
---------------	----

Modify Data

HZF

07/07/2025

$\triangle$	
$\triangle_1$	A1

Modify Data	
-------------	--

H7F

10/11/2024	Δ
------------	---

	A1
	A0

RELEASE

1121
475

10/11/2024	P
03/11/2024	