
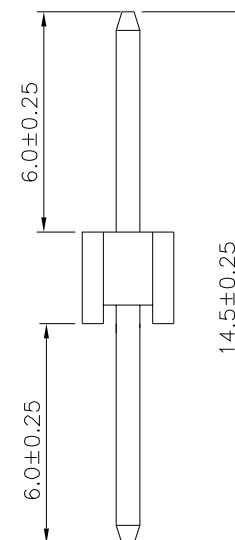
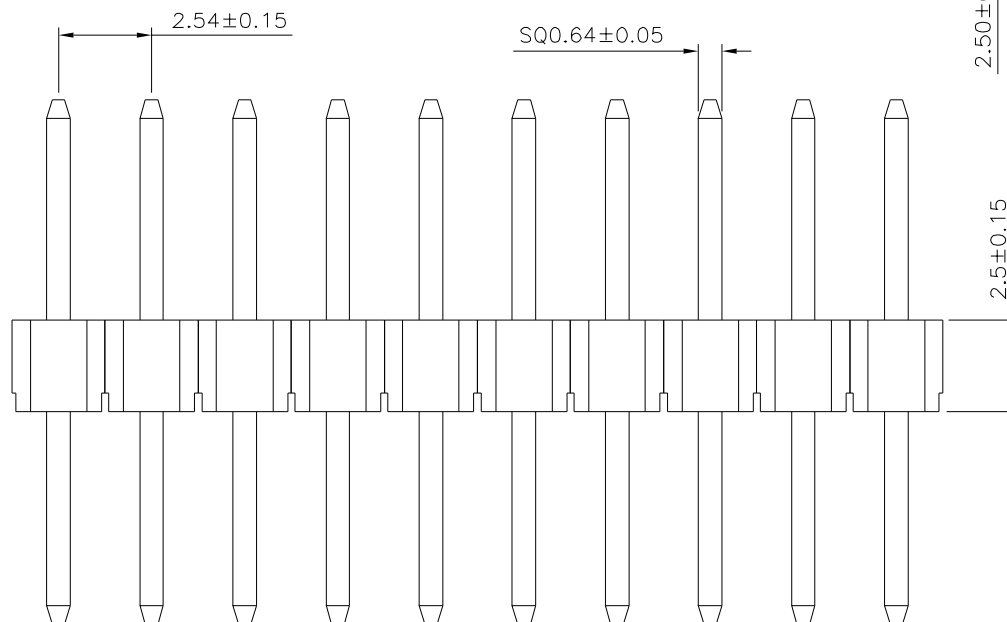


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

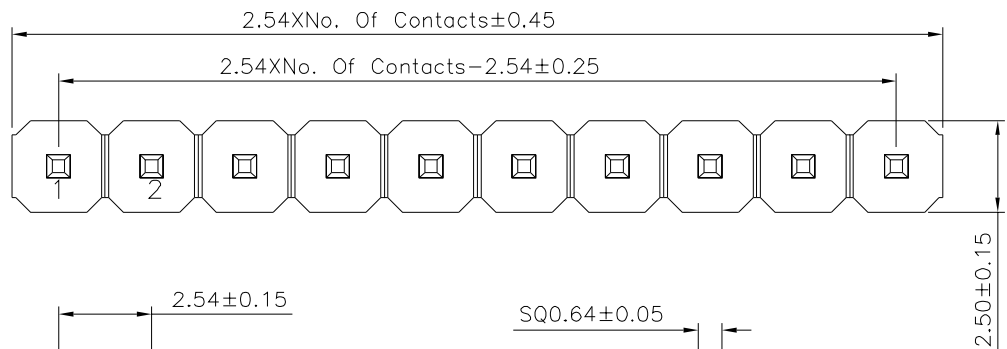

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

23029

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY	
------------	--

HZF

DRAWING BY

GAC


REV.

AO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	±0.30	X.*	±2°
.X	±0.25	.X*	±1.5°
.XX	±0.20	.XX*	±1.0°
.XXX	±0.15	.XXX*	±0.5°

UNIT	mm
------	----



5°		AO
----	---	----

AO

NEW RELEASE

RELEASE

HZF

	10/07/2025
--	------------

NO.	REV.
-----	------

REVISIONS

CHK

DATE