

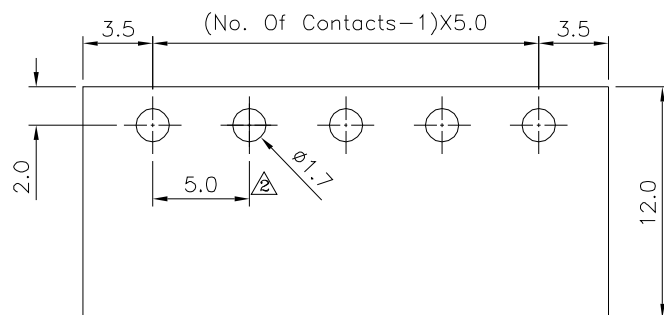
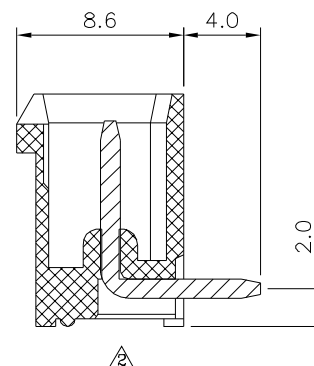


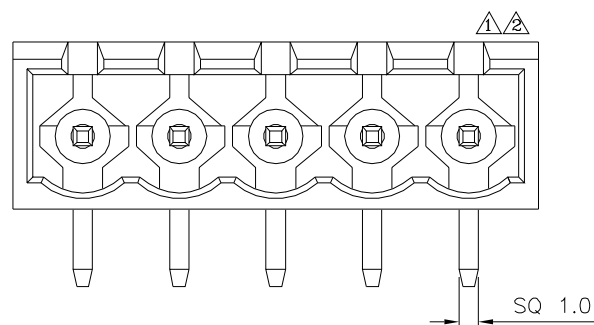

Recommended P.C.B. Layout

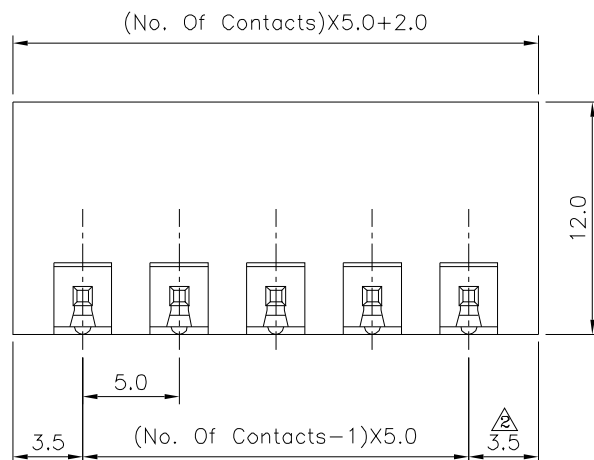

△ SPECIFICATION

Current Rating:16A
 Voltage Rating:300V AC
 Withstanding Voltage:2500V AC(1 Minute)
 Using Temperature Range:−40°C~+105°C
 Soldering Temperature:+250°C,5Seconds Max.
 Solder Pin:Copper Alloy,Tin Plated
 △ Insulator Body(Housing):Polyamide+G.F.(UL94V−0),Green
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △△

23096

SCALE NONE

APPROVED BY
 Jason Wu

CHECKED BY
 Leo Han

DRAWING BY
 Michelle Lee

REV. A2

UNLESS OTHERWISE
 SPECIFIED

TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 X° ±1°

UNIT
 mm

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	03/12/2015
△1	A1	Modify Data	HZF	07/30/2010
△0	A0	NEW RELEASE	HZF	05/13/2009