
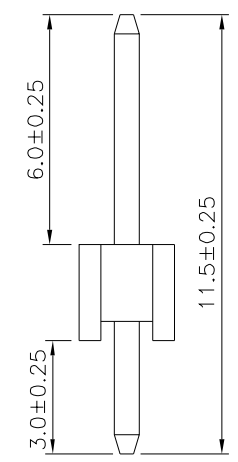
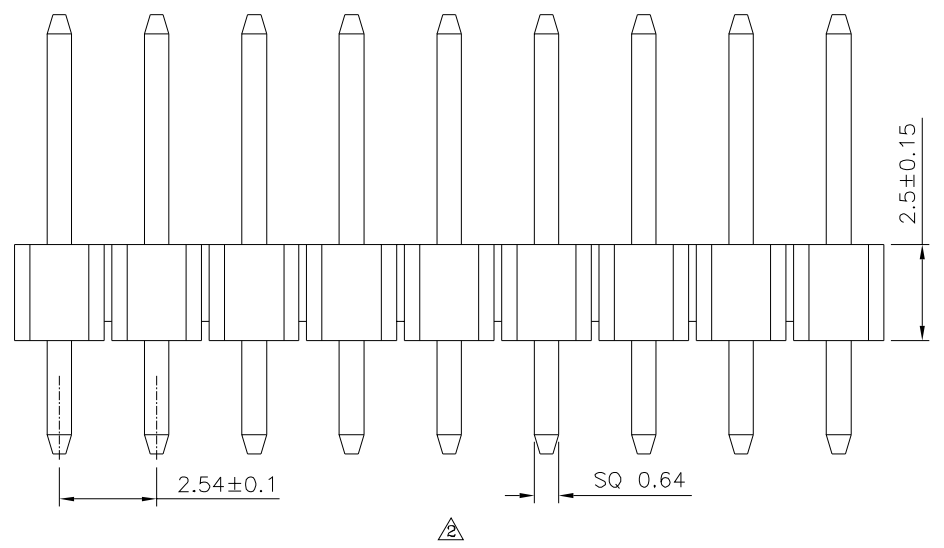


△ Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance±0.05)

- △ SPECIFICATION
- Current Rating:3A
  - △ Withstanding Voltage:1000V AC Min./Minute
  - Contact Resistance:20 Milliohms Max.
  - Insulation Resistance:1000 Megohms Min.
  - Operation Temperature:-40°C~+105°C
  - Housing:PA9T(UL94V-0),Black
  - △ Contact:Brass,Gold Flash Over All,Over Nickel
  - RoHS Compliant

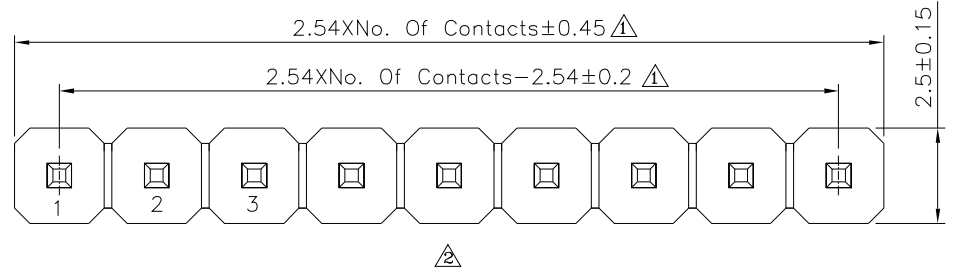

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY	
23100		MEI	
		CHECKED BY	
		HZF	
DRAWING BY		YBL	
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
X.	±0.25	X.*	±2°		
.X	±0.20	.X*	±1.5°		
.XX	±0.15	.XX*	±1°		
.XXX	±0.10	.XXX*	±0.5°		
UNIT	mm				
NO.	REV.	REVISIONS	CHK	DATE	
△	A3	Modify Data	HZF	03/08/2024	
△	A2	Modify Data	HZF	06/29/2023	
△	A1	Modify Data	HZF	01/04/2017	
△	A0	NEW RELEASE	HZF	05/18/2013	