

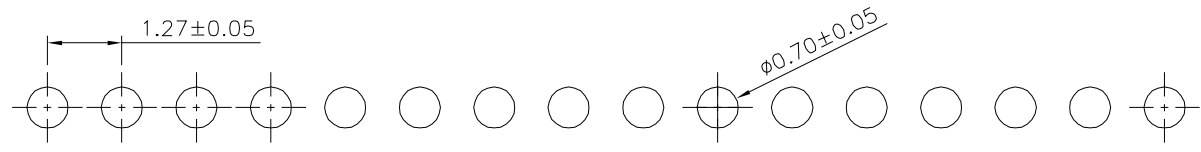
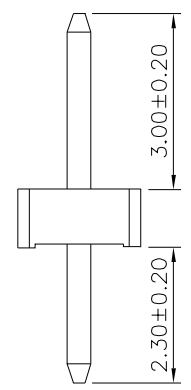


SPECIFICATION
 Current Rating:1 Amp
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstand Voltage:500V AC/Minute
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 RoHS Compliant

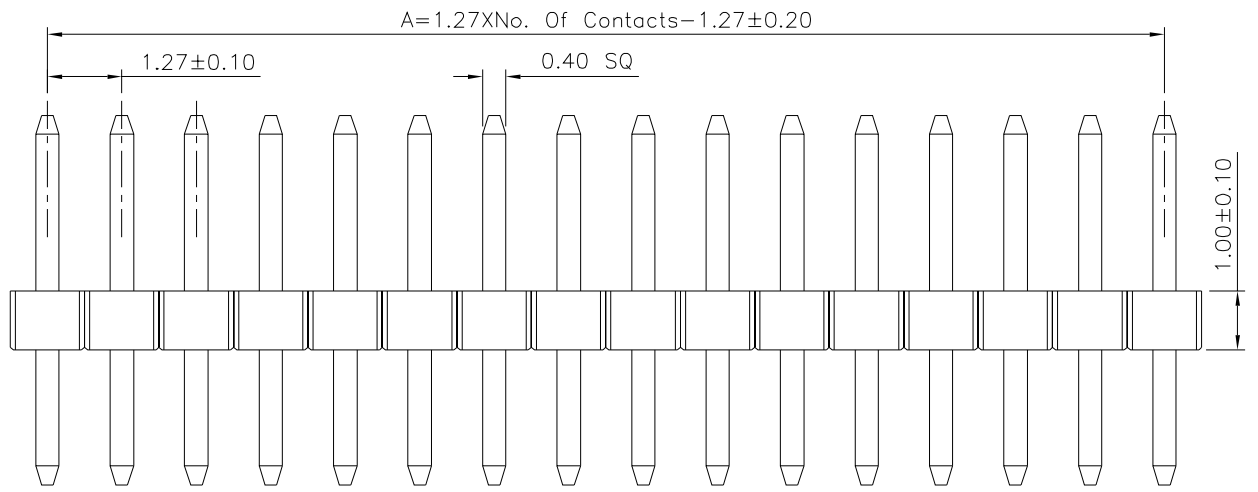

Recommended P.C.B. Layout

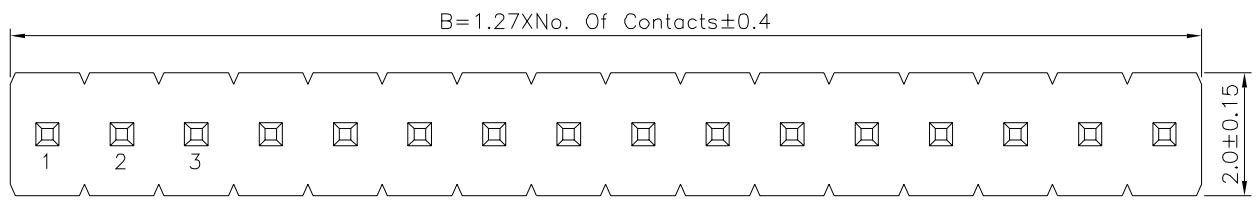

Pin	A	B	Pin	A	B
02	1.27	2.54	27	33.02	34.29
03	2.54	3.81	28	34.29	35.56
04	3.81	5.08	29	35.56	36.83
05	5.08	6.35	30	36.83	38.10
06	6.35	7.62	31	38.10	39.37
07	7.62	8.89	32	39.37	40.64
08	8.89	10.16	33	40.64	41.91
09	10.16	11.43	34	41.91	43.18
10	11.43	12.70	35	43.18	44.45
11	12.70	13.97	36	44.45	45.72
12	13.97	15.24	37	45.72	46.99
13	15.24	16.51	38	46.99	48.26
14	16.51	17.78	39	48.26	49.53
15	17.78	19.05	40	49.53	50.80
16	19.05	20.32	41	50.80	52.07
17	20.32	21.59	42	52.07	53.34
18	21.59	22.86	43	53.34	54.61
19	22.86	24.13	44	54.61	55.88
20	24.13	25.40	45	55.88	57.15
21	25.40	26.67	46	57.15	58.42
22	26.67	27.94	47	58.42	59.69
23	27.94	29.21	48	59.69	60.96
24	29.21	30.48	49	60.96	62.23
25	30.48	31.75	50	62.23	63.50
26	31.75	33.02			

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
23102		EMILY	
		CHECKED BY	
		HZF	
DRAWING BY		SONG	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 ANG.
 UNIT mm

NO.	REV.	DESCRIPTION	CHK	DATE
△	A0	NEW RELEASE	HZF	11/29/2013
		REVISIONS		