




SPECIFICATION
Current Rating:0.3A 6V DC
Withstand Voltage:500V AC For 1 Minute
Insulation Resistance:100 Megaohms Min. At 100V DC
Contact Resistance:70 Milliohms Max.(Initial)
Operating Force:200±100g
Life:10000 Cycles
Travel:2.0±0.3mm
RoHS Compliant

No.	Name	Material	Remark
1	Cover	Stainless Steel	No Plated
2	Stem	PA6T	_____
3	Clip	Phosphor Bronze	Silver Plated
4	Case	PA6T	_____
5	Terminal	Brass	Silver Plated

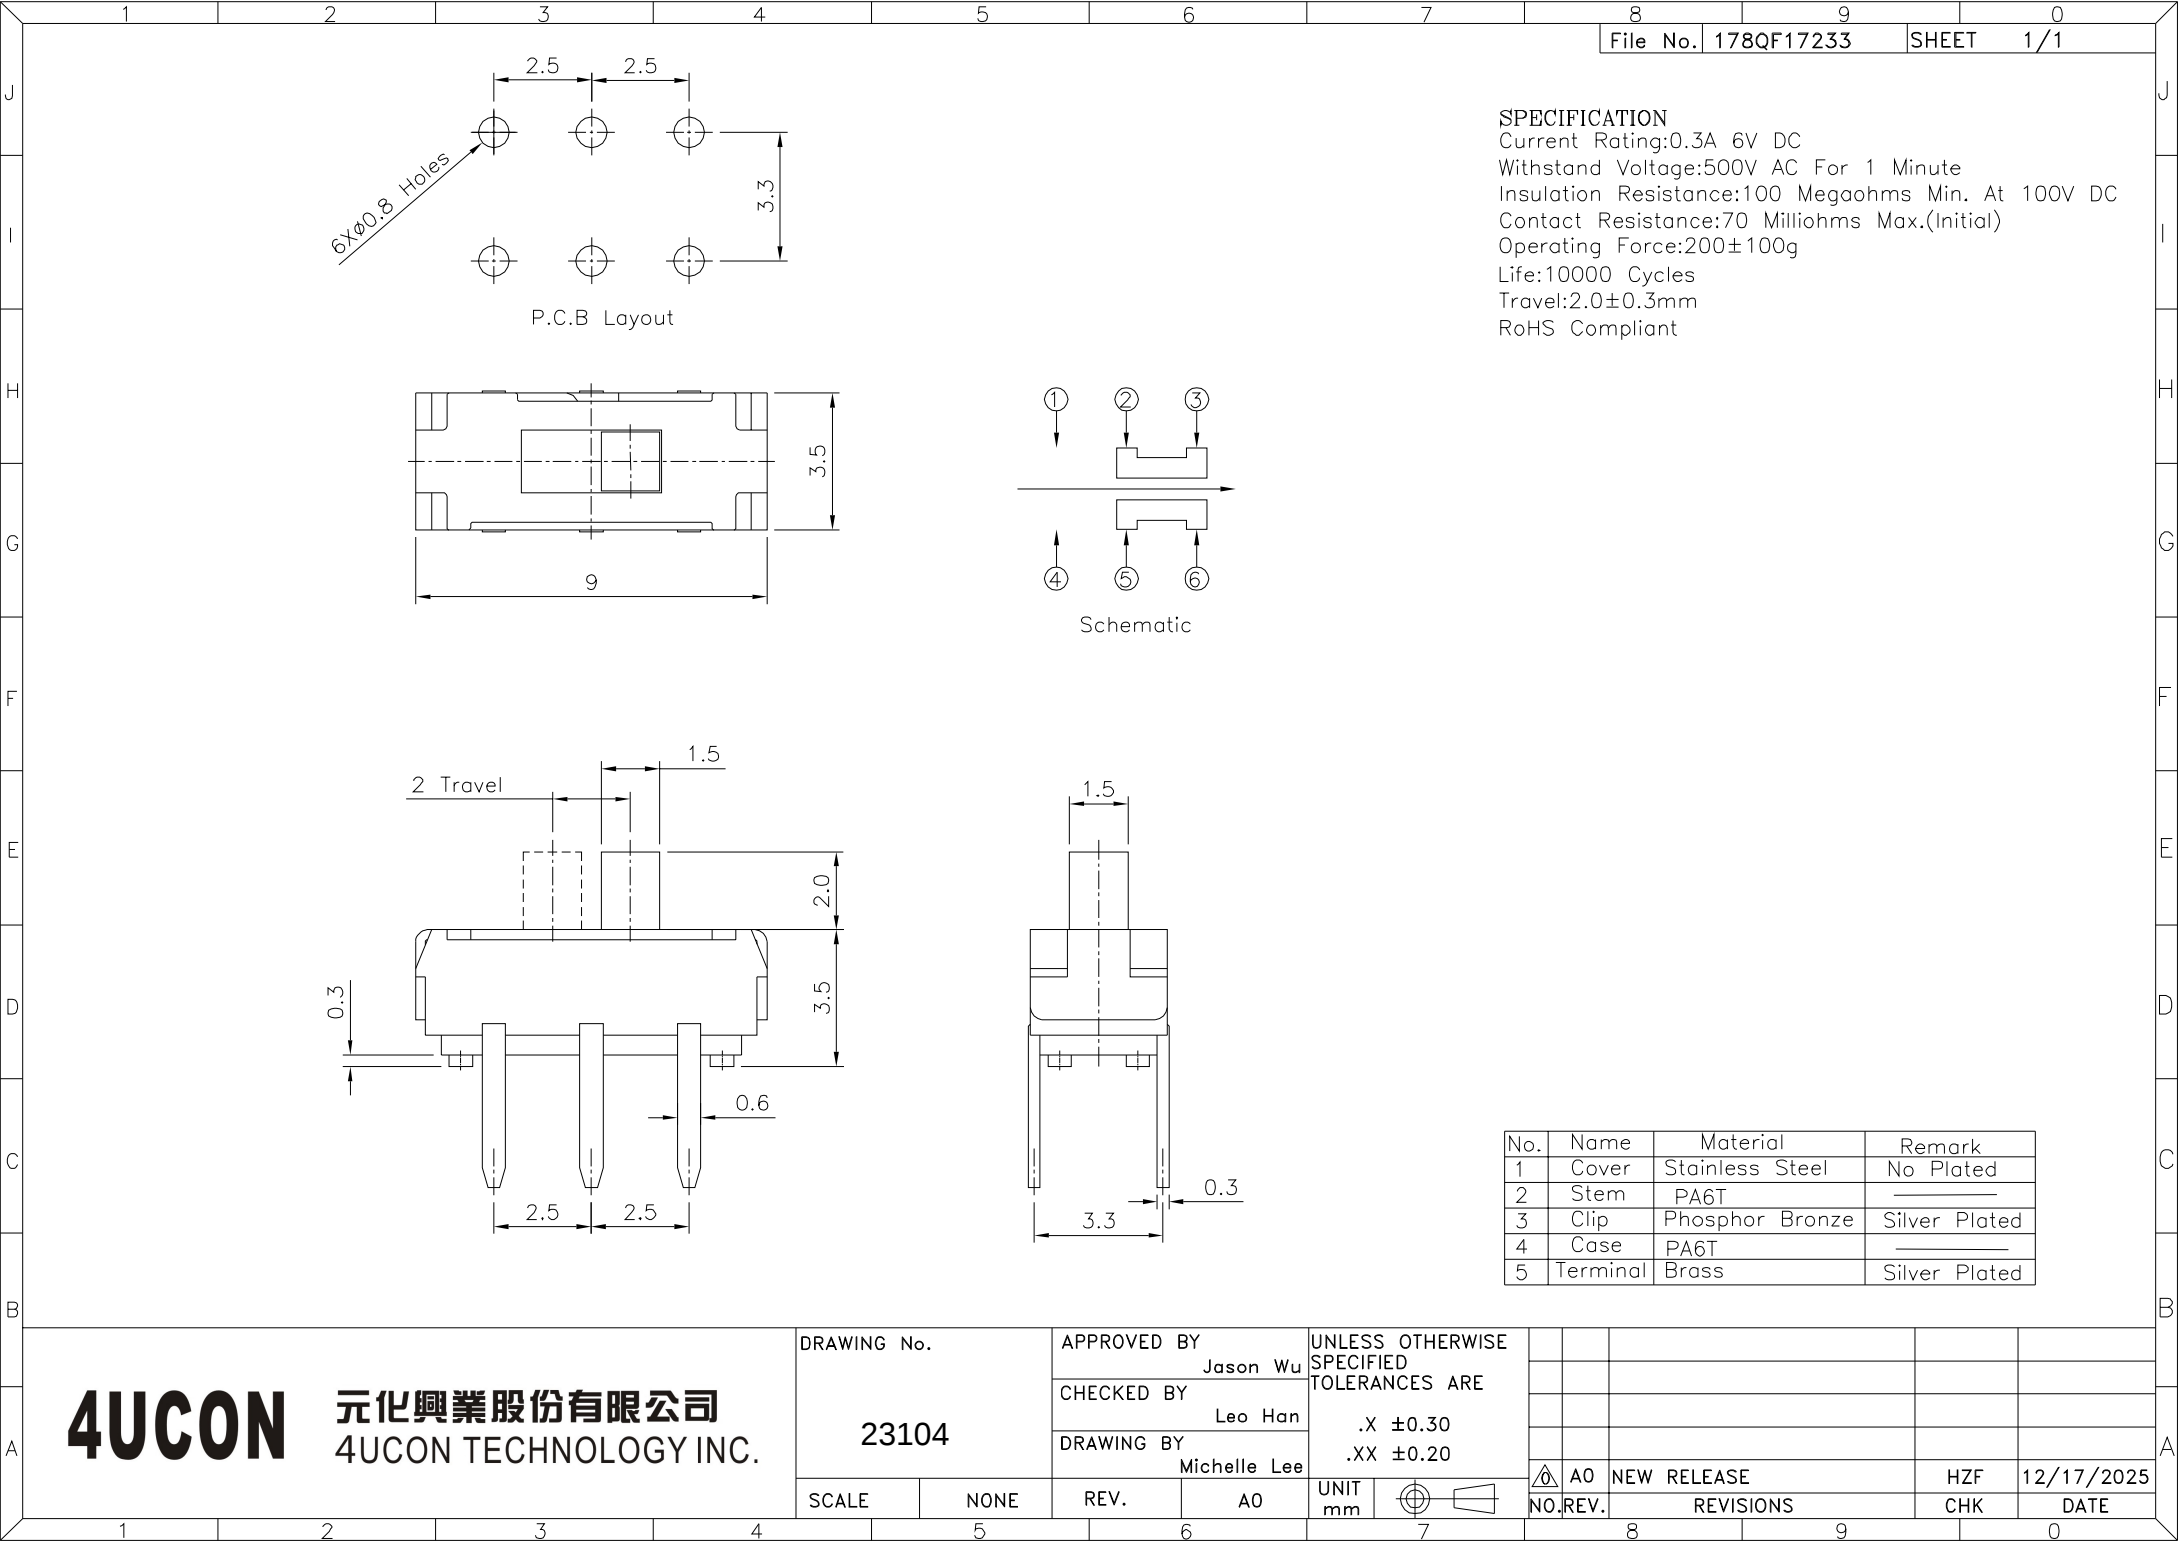