

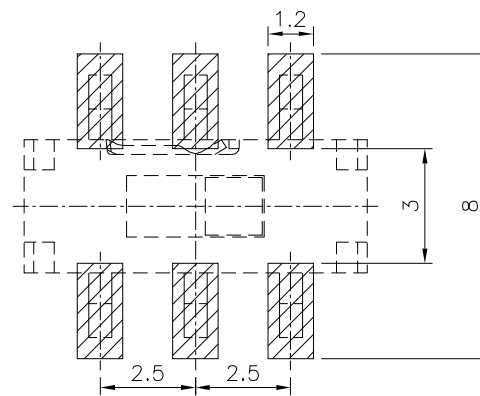
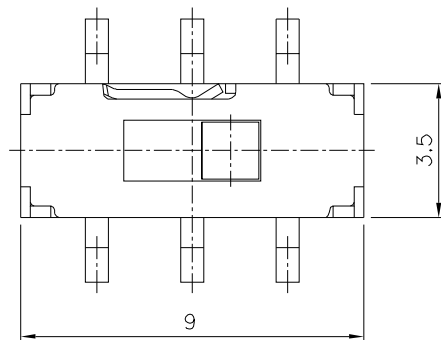



SPECIFICATION

Rating:0.3A 6V DC
 Withstand Voltage:500V AC For 1 Minute
 Insulation Resistance:100 Megaohms Min. At 100V DC
 Contact Resistance:70 Milliohms Max.(Initial)
 Operation Temperature:-20°C~+70°C
 Operating Force:200±100g
 Life:10000 Cycles
 Travel:2.0±0.3mm
 RoHS Compliant

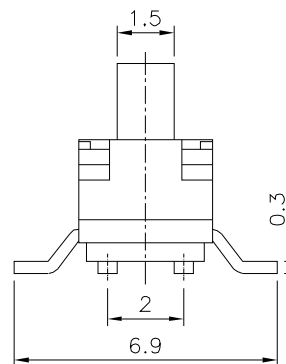

P.C.B Layout

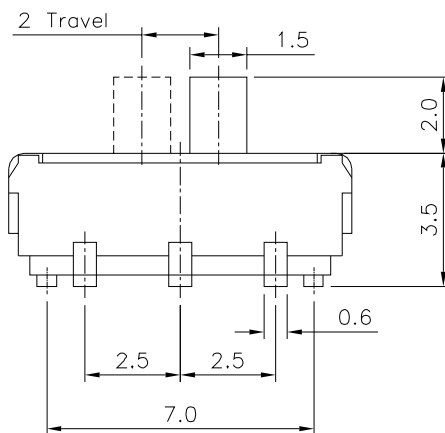

Schematic

No.	Name	Material	Remark
1	Cover	Stainless Steel	No Plated
2	Stem	PA6T	_____
3	Clip	Phosphor Bronze	Silver Plated
4	Case	PA6T	_____
5	Terminal	Brass	Silver Plated

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

23105

APPROVED BY
 Jason Wu

CHECKED BY
 Leo Han

DRAWING BY
 Michelle Lee

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.30

.XX ±0.20


SCALE

NONE

REV.

A0

UNIT
 mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

DATE

12/17/2025