

SPECIFICATION

Current Rating:3A

Withstand Voltage:1000V AC/Minute

Insulation Resistance:1000 Megaohms Min.

Contact Resistance:20 Milliohms Max.


Operation Temperature:-40°C~+105°C

Insulator:PA6T(UL94V-0),Black




Contact:Brass,Gold Flash Over Nickel

RoHS Compliant

*2X03~2X23P Available

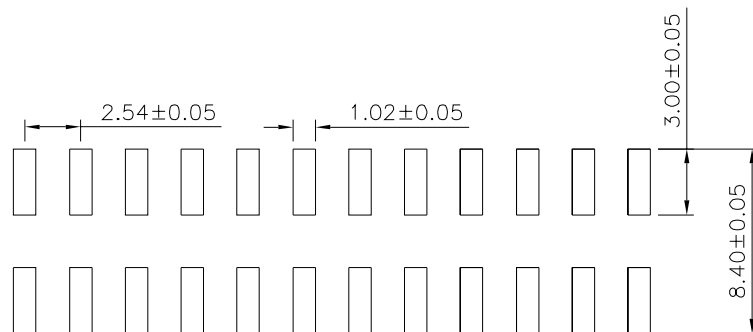

Recommended PCB Layout

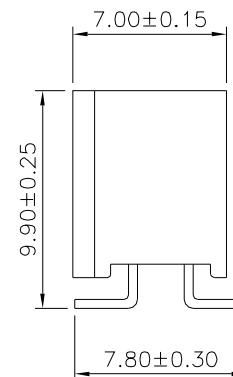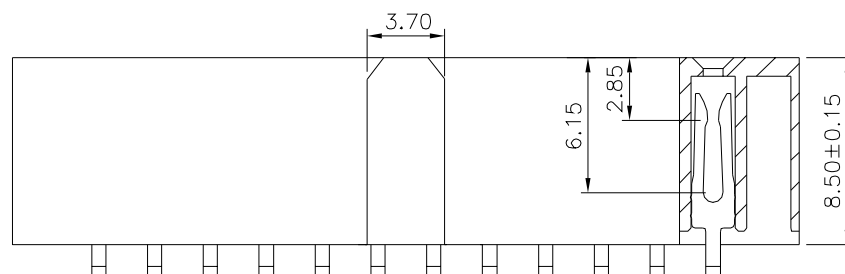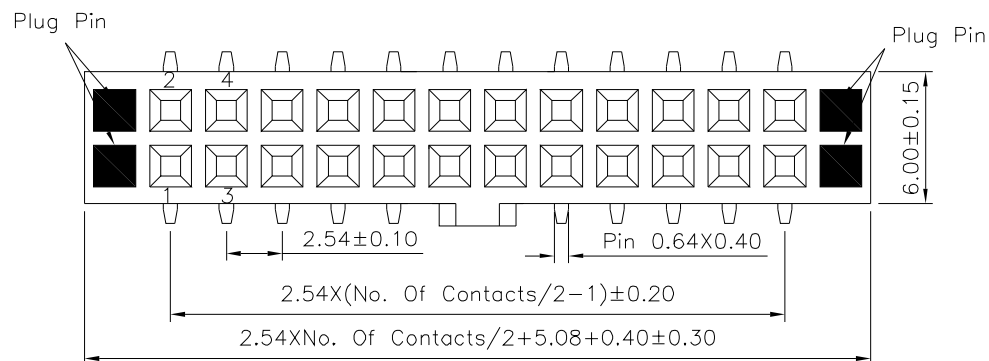

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

23123

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee

REV.


A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.30

.XX ±0.20

UNIT
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

12/25/2025

DATE