

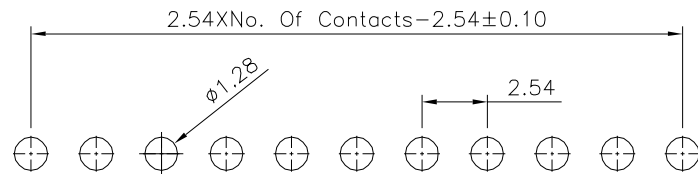



SPECIFICATION

Current Rating:3A/Contact Max.
 Insulation Resistance:1000 Megaohms At 100V
 Contact Resistance:4 Milliohms Max.
 Operation Temperature:-40°C~+105°C
 Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
 Clip(Contact 4 Finger):Beryllium Copper
 Gold Flash Over Nickel
 Insulator:PPS,Black
 RoHS Compliant

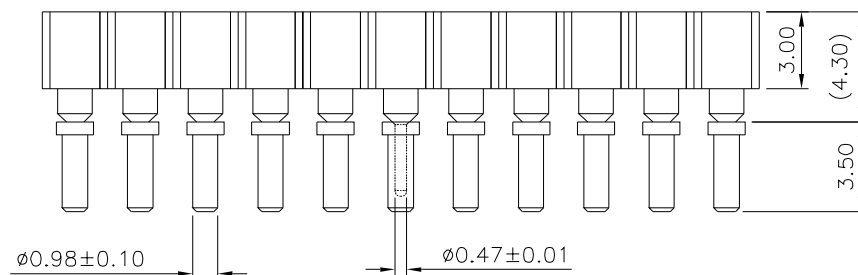

Recommended P.C.B Layout
 Tolerance±0.05

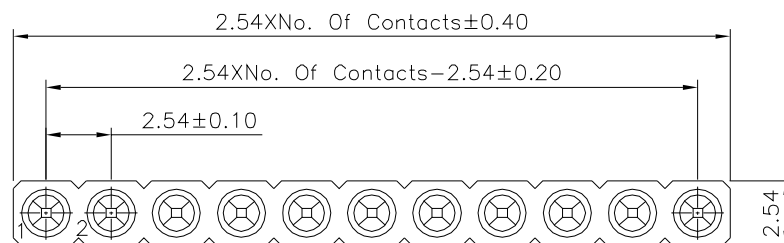

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

23128

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.38
 .XX ±0.25
 .XXX ±0.15
 ANG. ±5°

UNIT
 mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

DATE

HZF

11/25/2025