




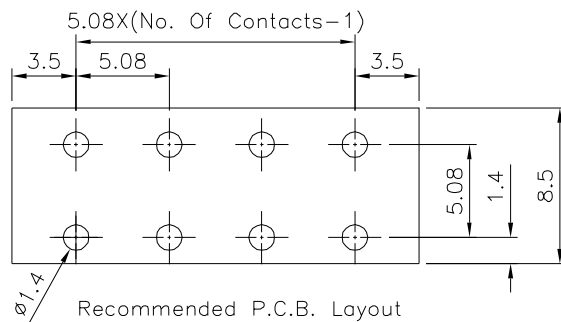

△ SPECIFICATION
 Current Rating: 16A/Way Max.
 Voltage Rating: 300V AC
 Withstanding Voltage: 2500V AC/Minute
 Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Insulator Body (Housing): Polyamide (UL94V-0), Green
 Solder Pin: Copper Alloy, Tin Plated
 RoHS Compliant

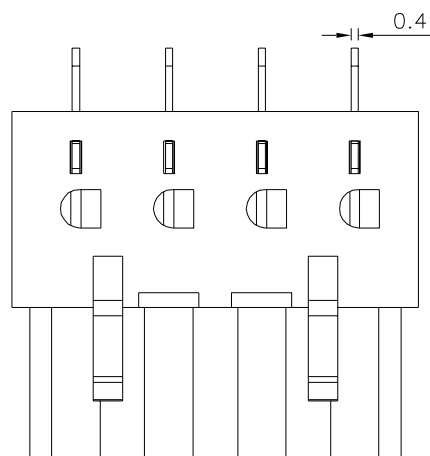

Note	
Length	Tolerance
30mm	± 0.30
30~60mm	± 0.40
60~120mm	± 0.50
120~220mm	± 0.60

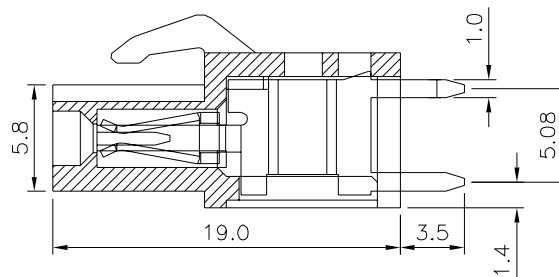

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

23135

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee

REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE △

X. ± 0.50


.X ± 0.40

.XX ± 0.30

ANG. $\pm 1^{\circ}$

UNIT

mm



△ A1

Modify Mata

HZF

07/30/2026

△ A0

NEW RELEASE

HZF

02/05/2017

NO. REV.

REVISIONS

CHK

DATE