

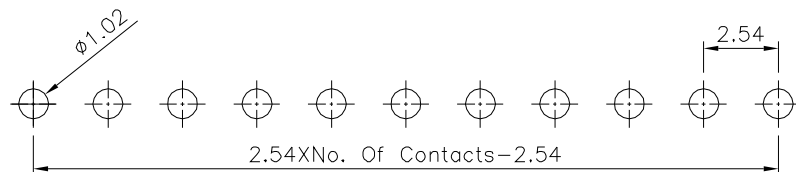
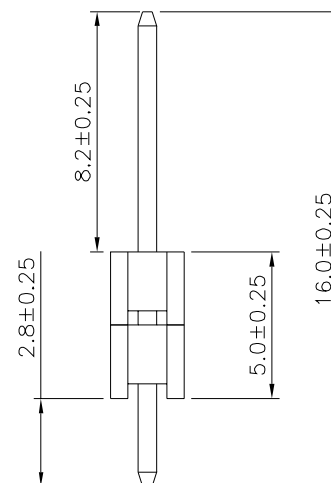


SPECIFICATION
 Current Rating:3A
 Withstand Voltage:1000V AC Min./Minute
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Operation Temperature:-40°C~+105°C
 Insulator:PA9T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

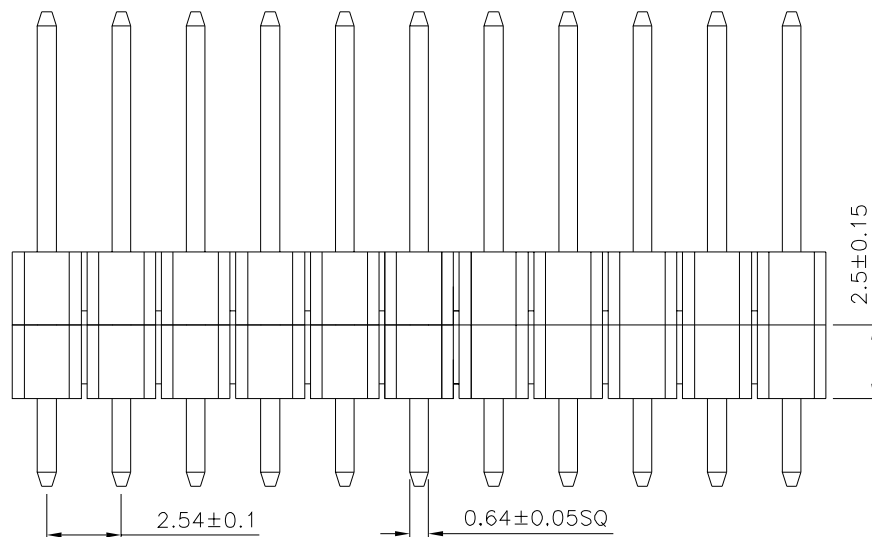

Recommend P.C.B Board Layout
 PCB Tolerance:±0.05(Top View)

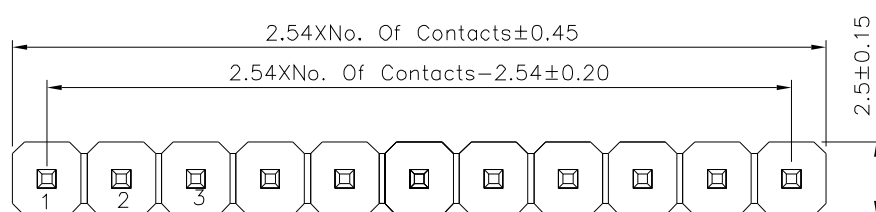

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

23137

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.30	X.* ±2"
.X ±0.25	.X.* ±1.5"
.XX ±0.20	.XX.* ±1.0"
.XXX ±0.15	.XXX.* ±0.5"

UNIT

mm

NO. REV.

REVISIONS

NO. REV.

REVISIONS

CHK

DATE

NO. REV.

REVISIONS

CHK

DATE

NO. REV.

REVISIONS

CHK

DATE

NO. REV.

REVISIONS

CHK

DATE

NO. REV.

REVISIONS

CHK

DATE

NO. REV.

REVISIONS

CHK

DATE

NO. REV.

REVISIONS

CHK

DATE