


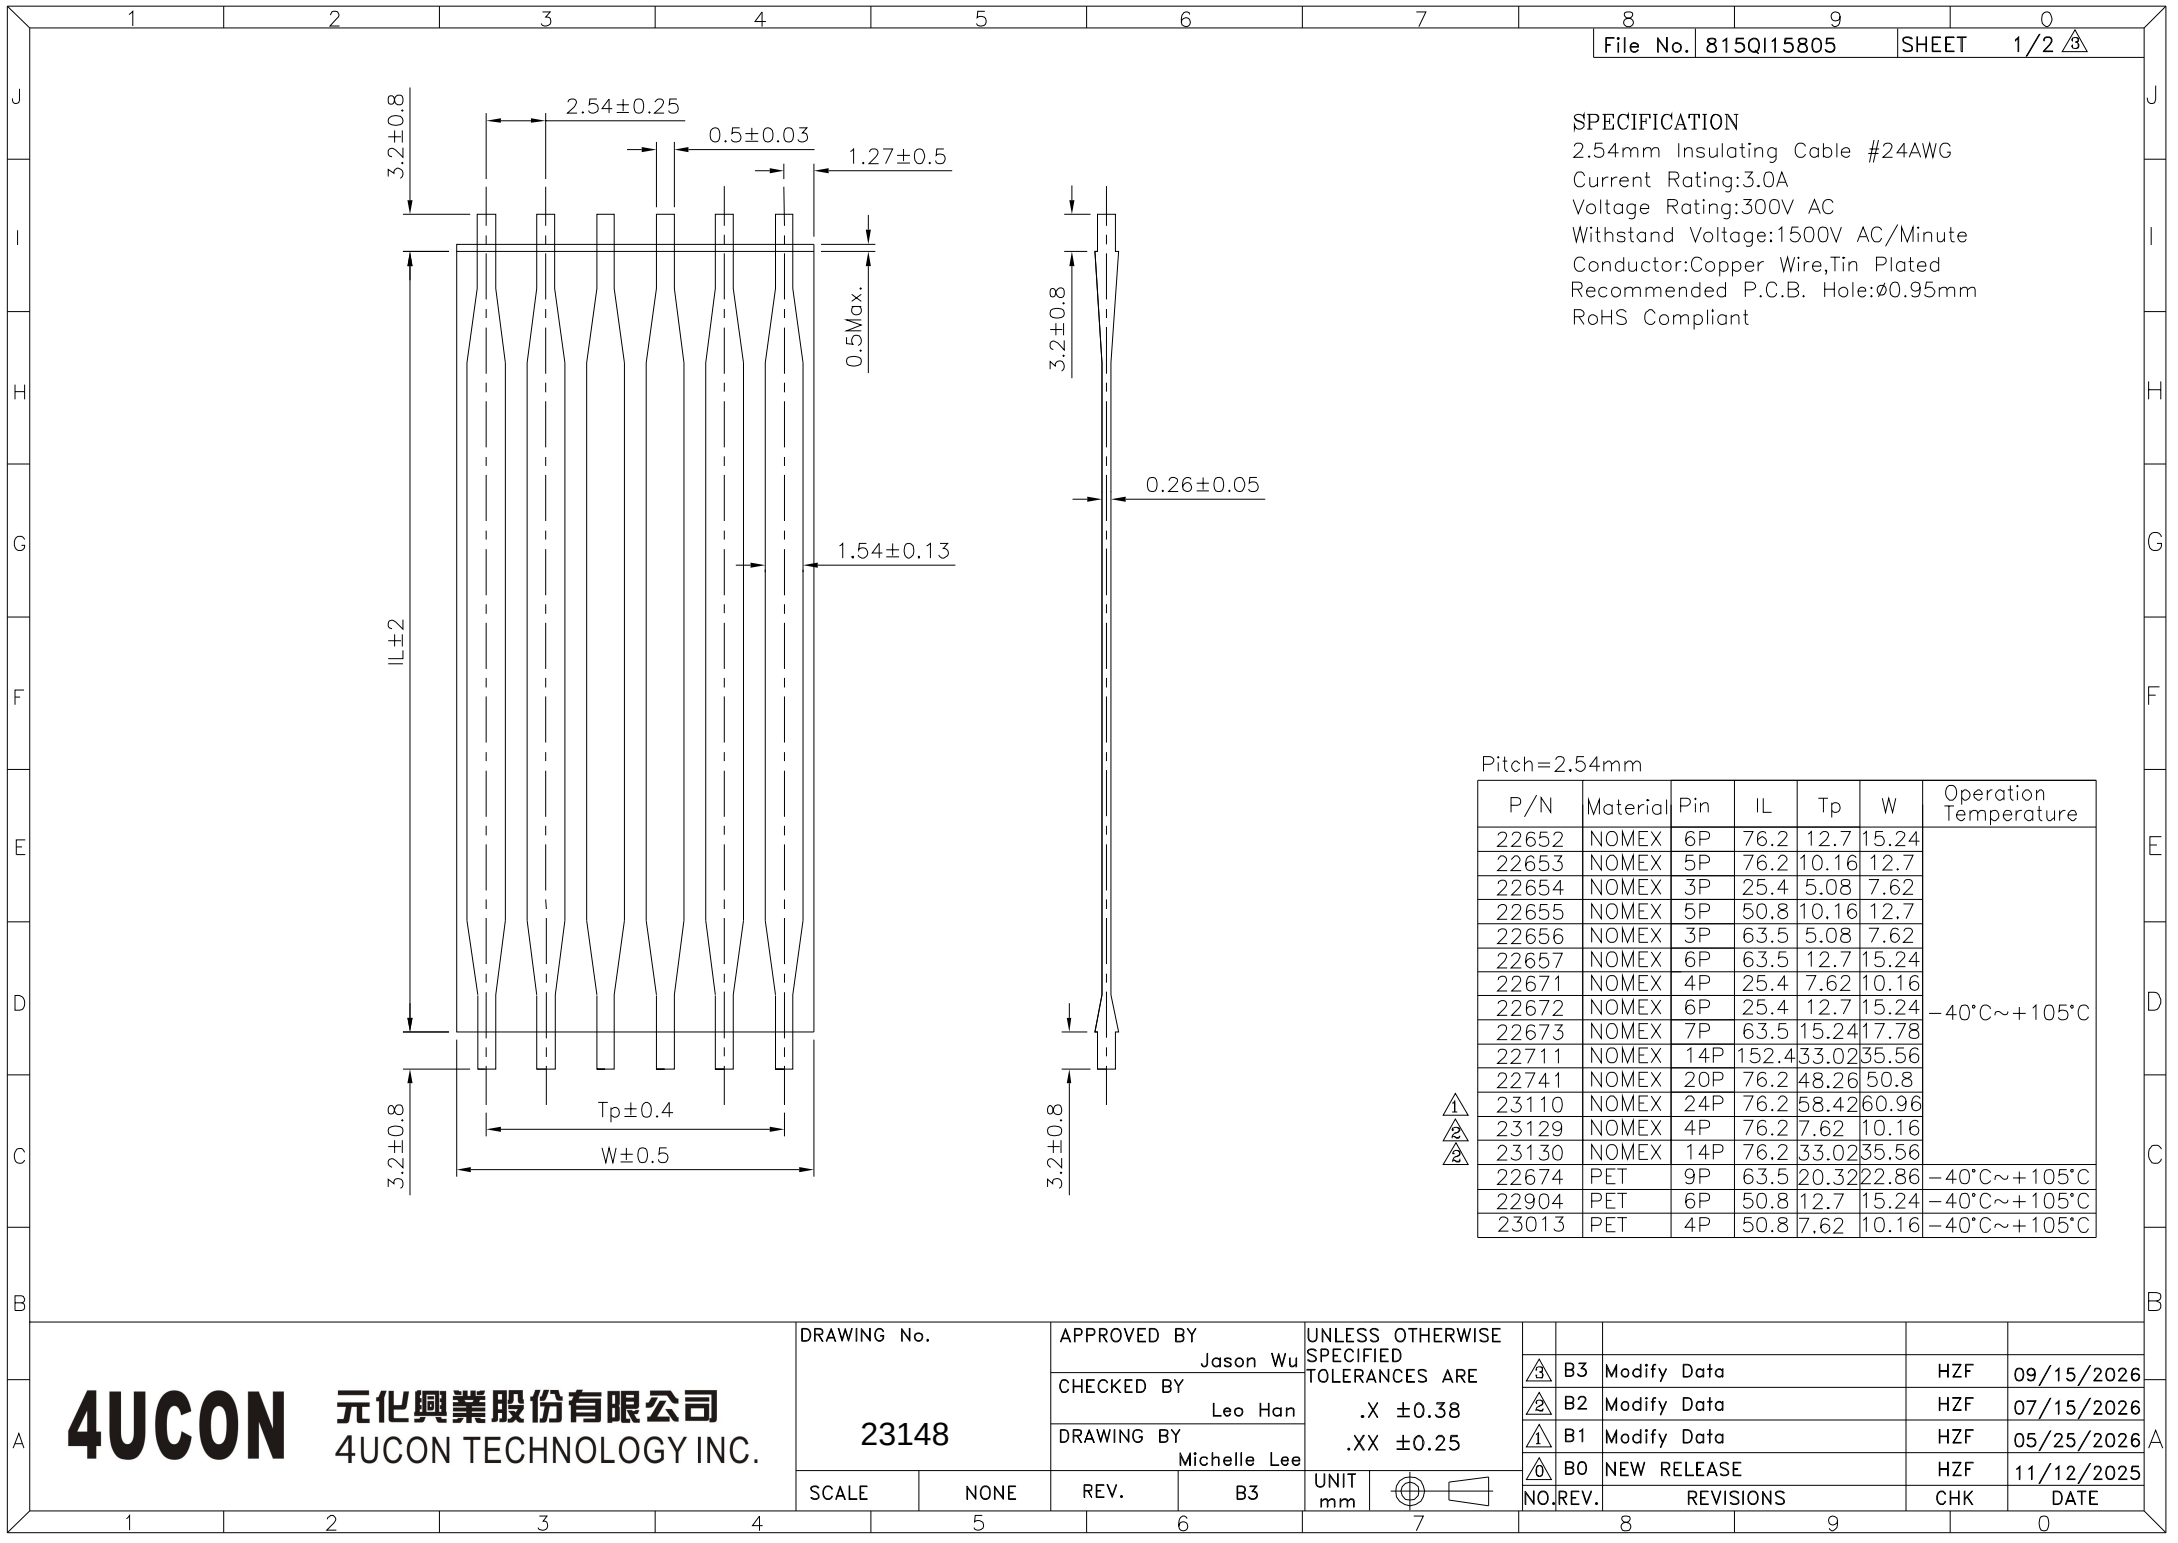


4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 23148		APPROVED BY Jason Wu		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25					
		CHECKED BY Leo Han				⚠ B3	Modify Data	HZF	09/15/2026
		DRAWING BY Michelle Lee				⚠ B2	Modify Data	HZF	07/15/2026
						⚠ B1	Modify Data	HZF	05/25/2026
					⚠ B0	NEW RELEASE	HZF	11/12/2025	
SCALE	NONE	REV.	B3	UNIT mm		NO. REV.	REVISIONS	CHK	DATE

SPECIFICATION

1.27mm Insulating Cable #28AWG
 Current Rating:1.6A
 Voltage Rating:200V AC
 Withstand Voltage:1050V AC/Minute
 Conductor:Tinned Coppe-Plated Steel Wire
 Recommended P.C.B. Hole:ø0.7mm
 RoHS Compliant

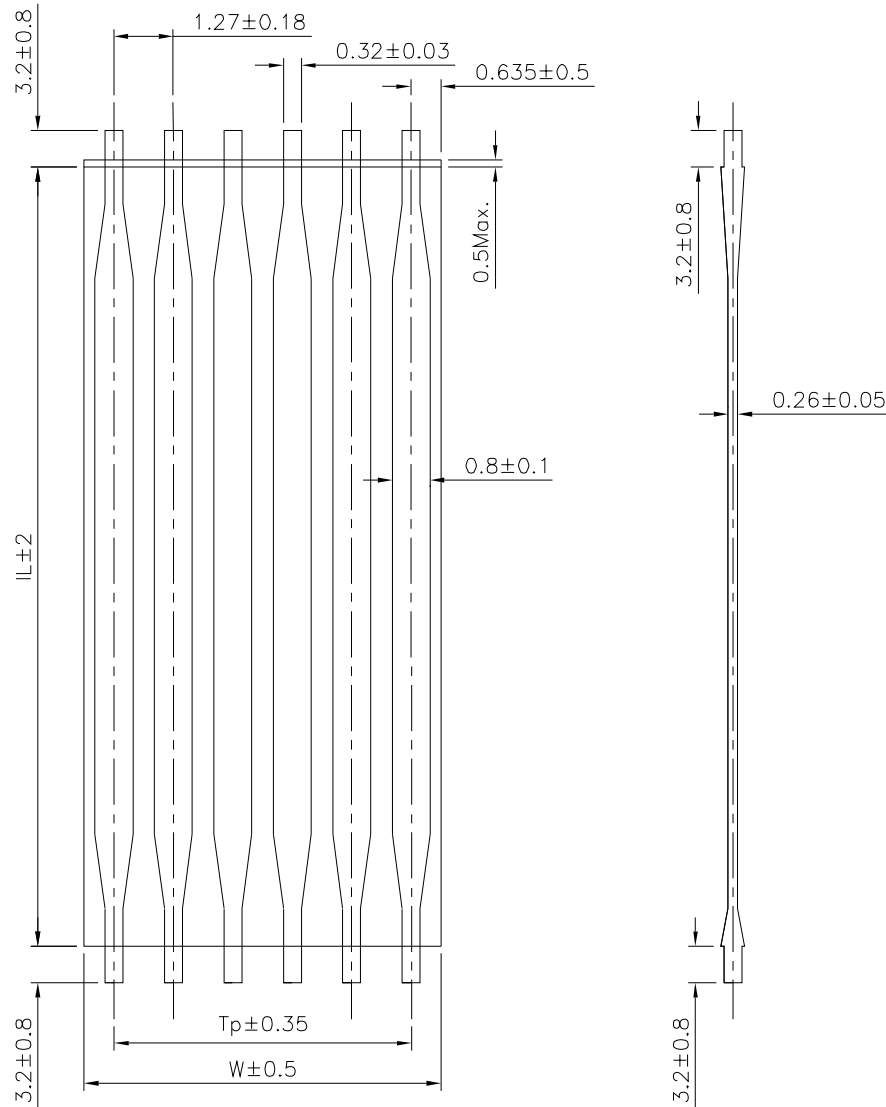

Pitch=1.27mm

P/N	Material	Pin	IL	Tp	W	Operation Temperature
23147	NOMEX	7P	25.4	7.62	8.89	-40°C~+105°C
23148	NOMEX	13P	25.4	15.24	16.51	

4UCON

元化興業股份有限公司

4UCON TECHNOLOGY INC.

DRAWING No.

23148

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee

REV.

B3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
	B3	Modify Data	HZF	09/15/2026
	B2	Modify Data	HZF	07/15/2026
	B1	Modify Data	HZF	05/25/2026
	B0	NEW RELEASE	HZF	11/12/2025