
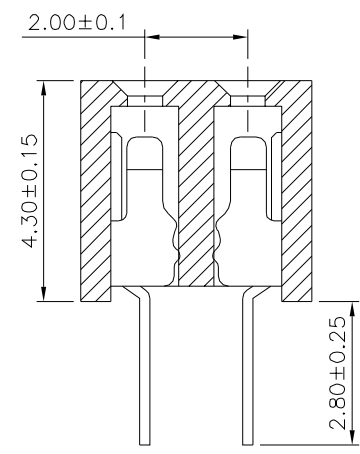
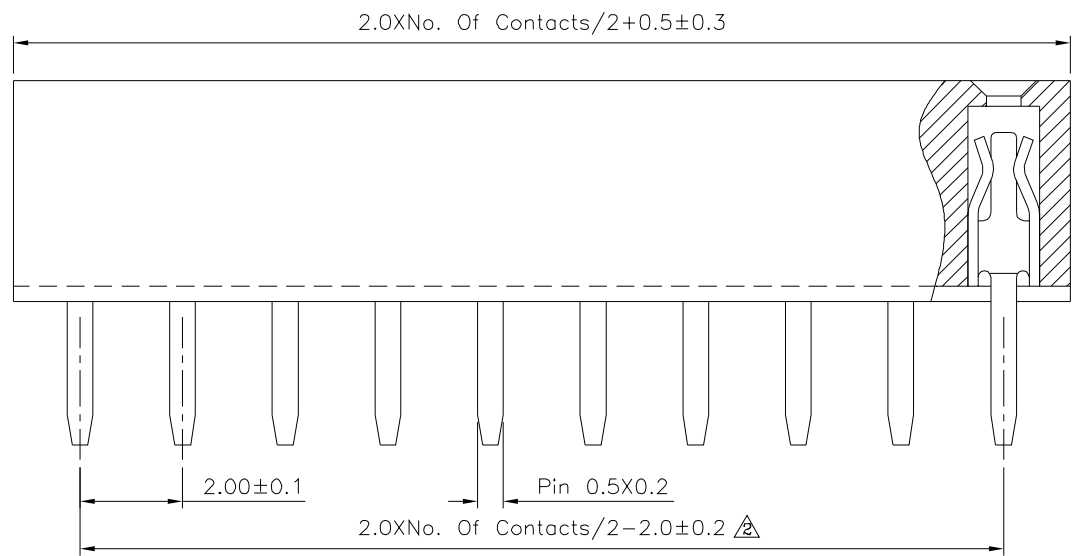


Recommended P.C.B. Layout

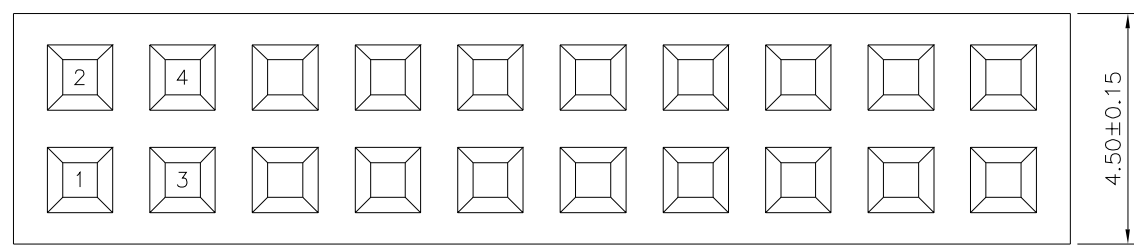

SPECIFICATION
 Current Rating:1.5 Amps
 Withstand Voltage:500V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature Range:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 ⚠ Contact:Phosphor Bronze,Gold Plated Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
00306		MEI	
		CHECKED BY	
		HZF	
DRAWING BY		CYP	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
X.	±0.25	X.*	±2°
.X	±0.20	.X*	±1.5°
.XX	±0.15	.XX*	±1°
.XXX	±0.10	.XXX*	±0.5°
UNIT	mm		
NO.	REV.	REVISIONS	CHK DATE
△2	A2	Modify Data	HZF 11/23/2016
△1	A1	Modify Data	HZF 04/17/2014
△0	A0	NEW RELEASE	HZF 12/11/2013