


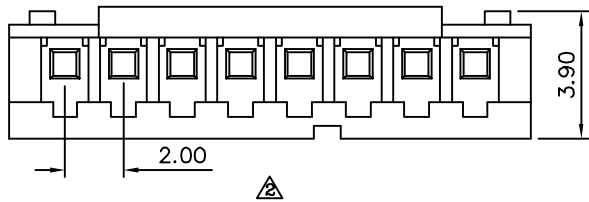
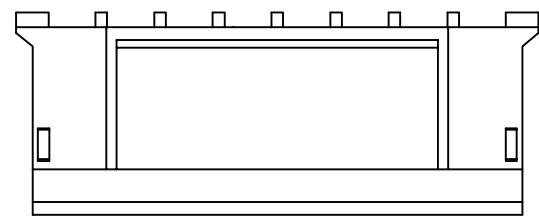


△ SPECIFICATION

Current Rating: 2A AC/DC
 Voltage Rating: 100V AC/Max.
 Operation Temperature: -25°C To +85°C
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Withstanding Voltage: 800V AC/Minute
 △ Insulator: PA66(UL94V-0), Black
 RoHS Compliant



2 Pin

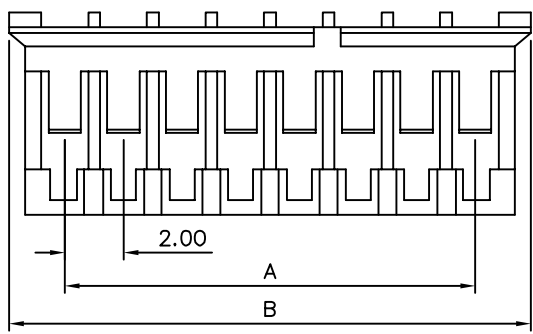

△ 3~16 Pin

Pin	A	B
2	2.0	5.8
3	4.0	7.8
4	6.0	9.8
5	8.0	11.8
6	10.0	13.8
7	12.0	15.8
8	14.0	17.8
9	16.0	19.8
10	18.0	21.8
11	20.0	23.8
12	22.0	25.8
13	24.0	27.8
14	26.0	29.8
15	28.0	31.8
16	30.0	33.8

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.3 .XX ±0.2 ANG.
01510		EMILY		
		CHECKED BY HZF		
		DRAWING BY CYP		
SCALE	NONE	REV.	A3	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A3		Modify Data	HZF	02/12/2015
△ A2		Modify Data	HZF	03/23/2010
△ A1		Modify Data	BECKY	2005/02/17
△ A0		NEW RELEASE		