

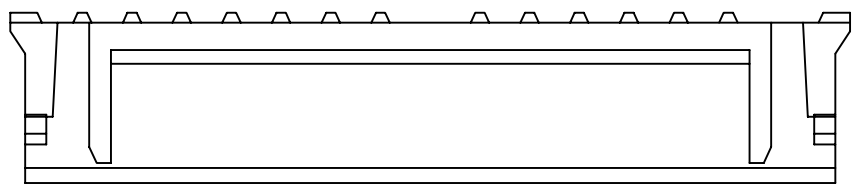
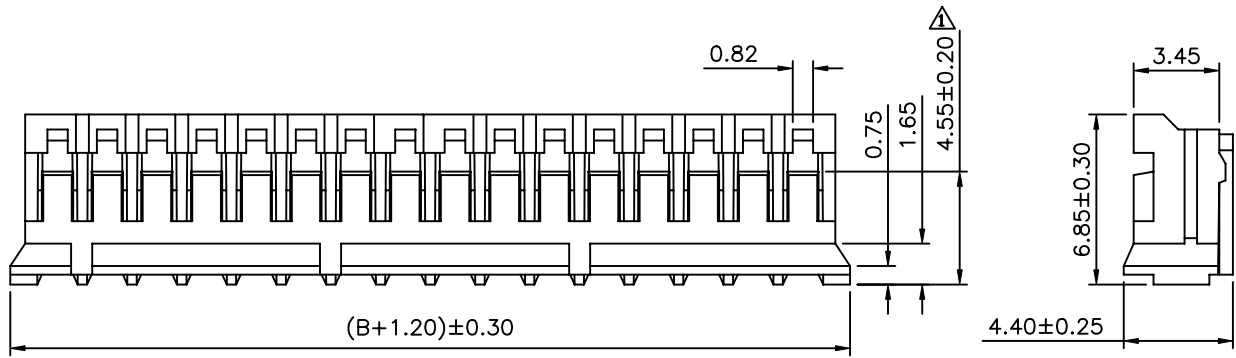



**△ SPECIFICATION**  
 Current Rating:2A AC/DC  
 Voltage Rating:100V AC/DC  
 Withstanding Voltage:800V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Insulator:PA66 UL94V-0,White  
 RoHS Compliant

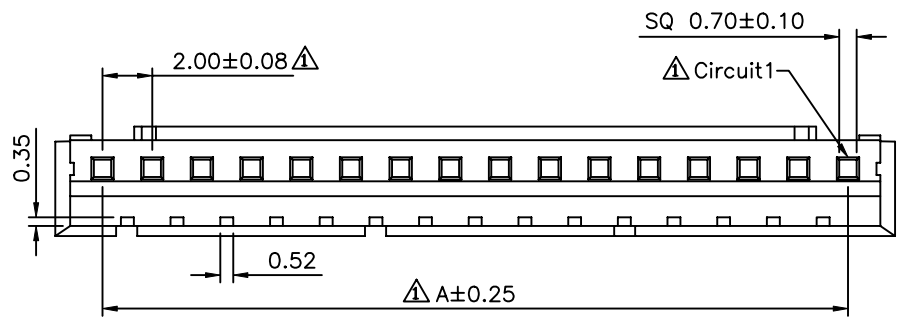

4~16Pin △



2Pin △



△ 3Pin

Pin	A	B
2	2.00	4.60
3	4.00	6.60
4	6.00	8.60
5	8.00	10.60
6	10.00	12.60
7	12.00	14.60
8	14.00	16.60
9	16.00	18.60
10	18.00	20.60
11	20.00	22.60
12	22.00	24.60
13	24.00	26.60
14	26.00	28.60
15	28.00	30.60
16	30.00	32.60

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 01521  
 SCALE NONE

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY XYH  
 REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.25 △  
 .XX ±0.20 .X\* ±2\*  
 .XXX ±0.10 .XX\* ±1\*  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	04/08/2009
△ A0		NEW RELEASE	BECKY	11/03/2004