


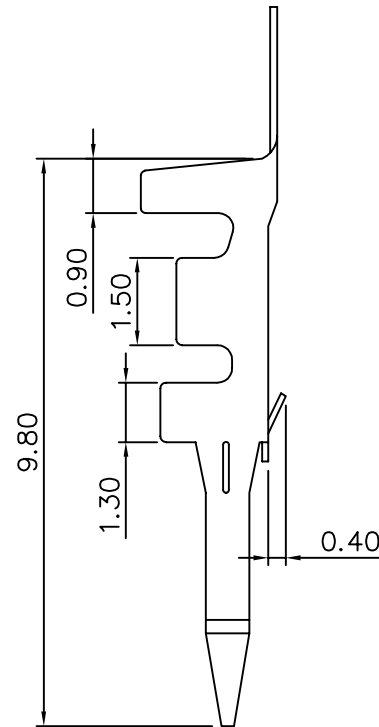


SPECIFICATIONS


Current Rating : AC ,DC 2A
 Voltage Rating : AC 250V DC
 Withstand Voltage : AC 800V/Min.
 Insulation Resistance;1000 Megohms Min.
 Temperature Range : -25°C To +85°C
 Contact Resistance : Initial Value/10Milliohms Max.
 After Environmental Testing/20Milliohms Max.
 Applicable PC Board Thickness:0.8-1.6mm
 Applicable Wires: AWG#24-#30
 Material: Brass
 Finish: Tin/Plated
 Thickness: 0.2mm

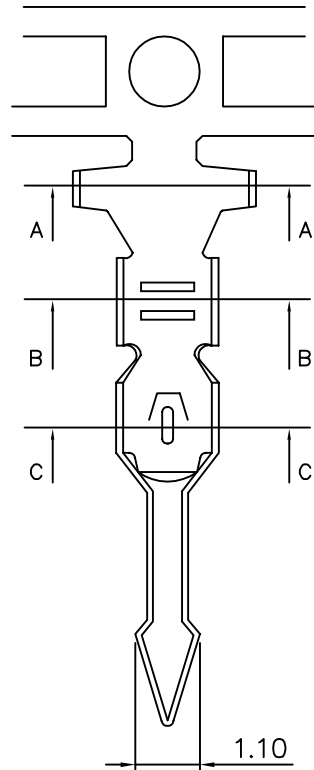

Section A-A



Section B-B



Section C-C

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

01737

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE


.X ±0.38

.XX ±0.25

ANG.

UNIT

mm



SCALE

NONE

REV.

A

AREA

REVISIONS

CHK

DATE