

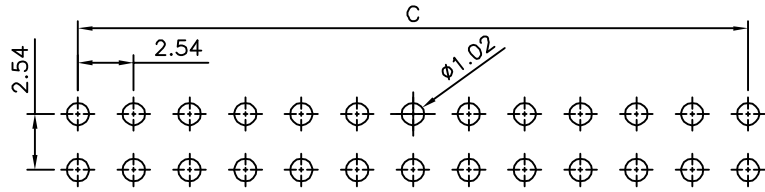
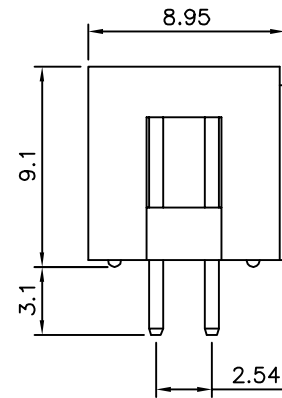


**SPECIFICATION**

Current Rating:3.0 Amp Max.  
 Withstand Voltage:1000V AC RMS For 1 Minute  
 Insulation Resistance:1000 Megohms Min. At 1000V DC  
 Operation Temperature:-55°C~+105°C  
 Housing:PBT(UL94V-0),Black  
 Terminal:Copper Alloy,Gold Flash  
 RoHS Compliant

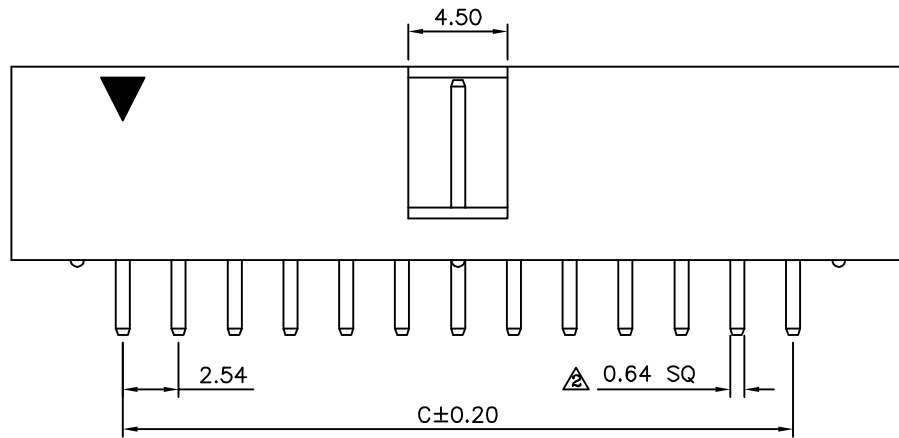

Recommended P.C.B. Layout(Top View)

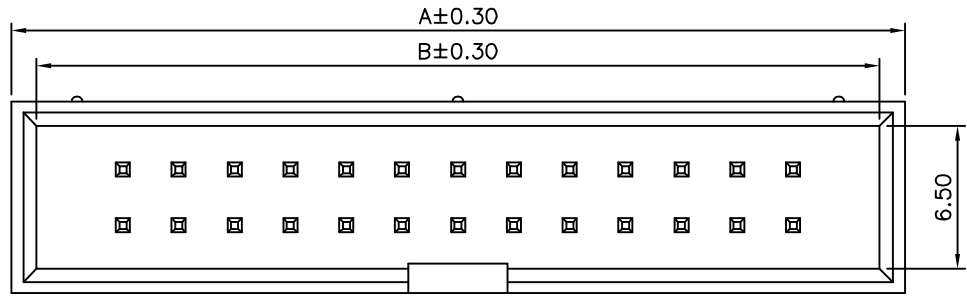

Pos.	A	B	C
06	15.24	12.94	5.08
08	17.78	15.48	7.62
10	20.32	18.02	10.16
12	22.86	20.56	12.70
14	25.40	23.10	15.24
16	27.94	25.64	17.78
20	33.02	30.72	22.86
24	38.10	35.80	27.94
26	40.64	38.34	30.48
30	45.72	43.42	35.56
34	50.80	48.50	40.64
40	58.42	56.12	48.26
44	63.50	61.20	53.34
50	71.12	68.82	60.96

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 03546

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY QQJ  
 REV. B2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.30  
 .XX ±0.20  
 .XXX ±0.10  
 ANG.

NO.	REV.	REVISIONS	CHK	DATE
△	B2	Modify Data	HZF	10/11/2010
△	B1	MODIFY DIM	HZF	07/15/2008
△	B0	NEW RELEASE	BECKY	06/20/2005

SCALE NONE

