File No.	432IC09801	SHEET	1/1

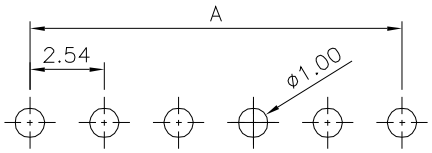

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

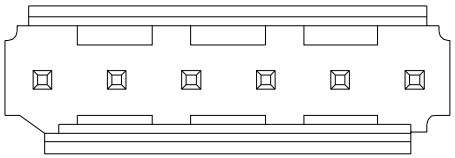

△2△1 2P~6P

△2 SPECIFICATION

△4 Voltage Rating:250V
Current Rating:3A
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−25°C~+85°C
Insulator:PA66(UL94V−0),Black
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

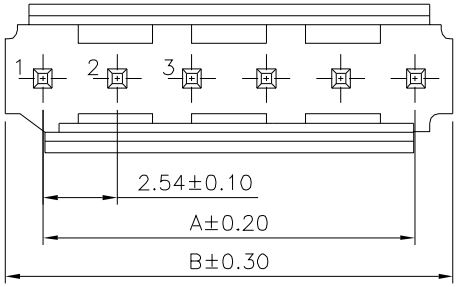

△2△1

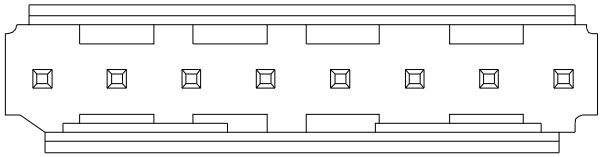

△2△1 7P~20P

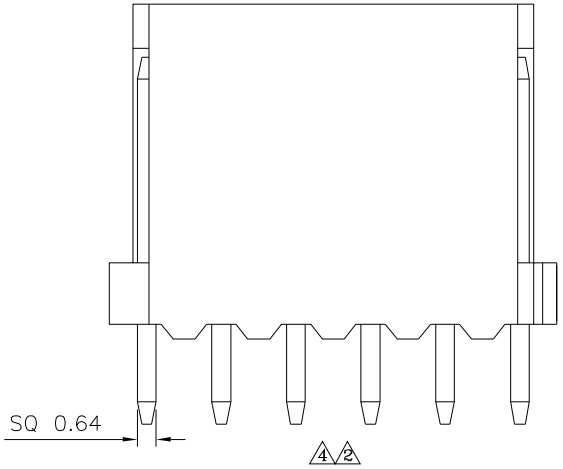

△4△2

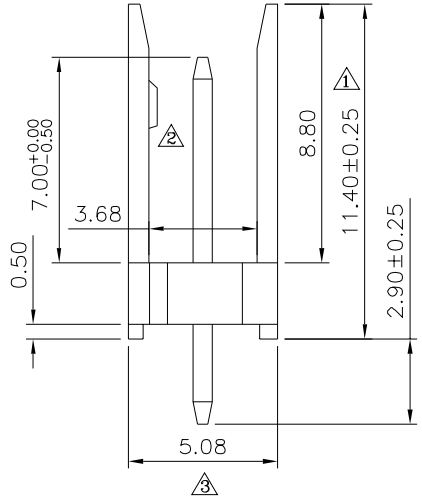

△4△2

Pin	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	08356
APPROVED BY	MEI
CHECKED BY	HZF
DRAWING BY	CYP
SCALE	NONE
REV.	A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△4	A4	Modify Data	HZF	03/09/2018
△3	A3	Modify Data	HZF	07/17/2014
△2	A2	Modify Data	HZF	05/25/2013
△1	A1	Modify Data	HZF	03/26/2012
△0	A0	NEW RELEASE	HZF	08/01/2011