File No.	432GC09806	SHEET	1/1

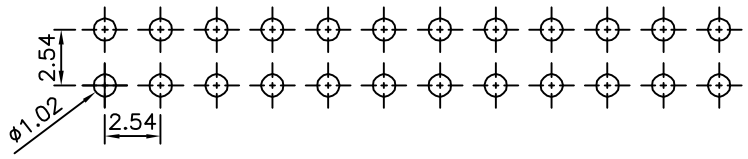

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

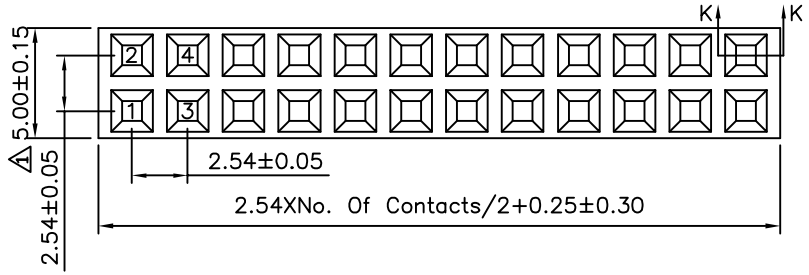

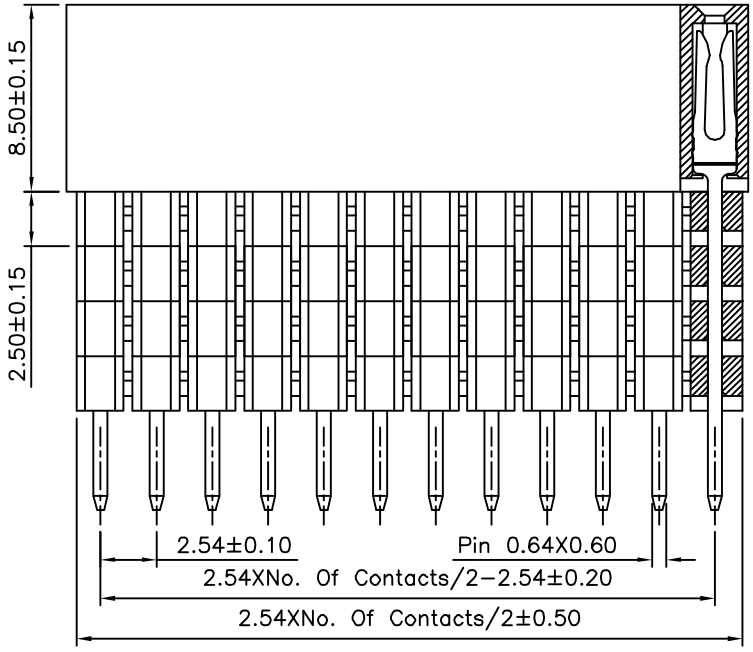

⚠ Section K−K

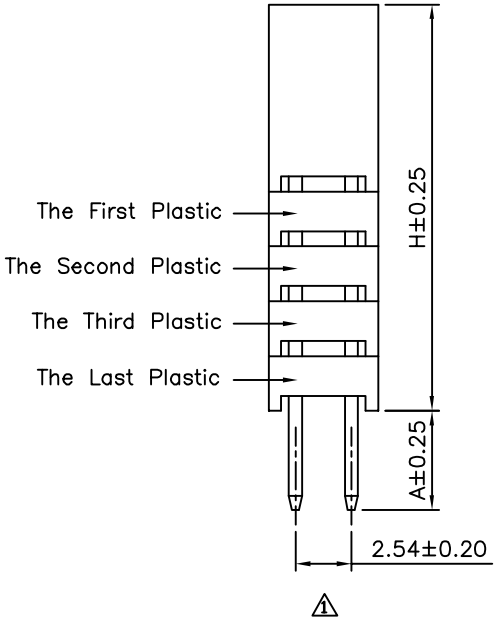

⚠1

SPECIFICATION

Current Rating:3.0 Amp
Withstand Voltage:1000V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Brass,Gold Plated Over Nickel
Insulator:PBT+30%G.F.(UL94V−0),Black
RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.05	2.30
0196	1	11.05	7.35
0196	1	11.05	12.2
0197	2	13.59	4.85
0197	2	13.59	9.65
0198	3	16.13	2.30
0198	3	16.13	7.10
⚠1 0199	4	18.6	4.60

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	08407		
APPROVED BY	MEI		
CHECKED BY	HZF		
DRAWING BY	CYP		
SCALE	NONE	REV.	B1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠1	B1	Modify Data	HZF	03/09/2016
⚠0	B0	NEW RELEASE	HZF	05/07/2014