
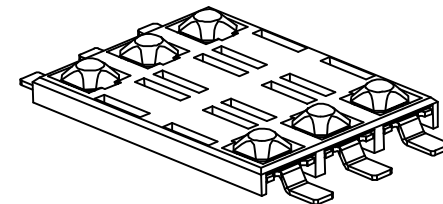
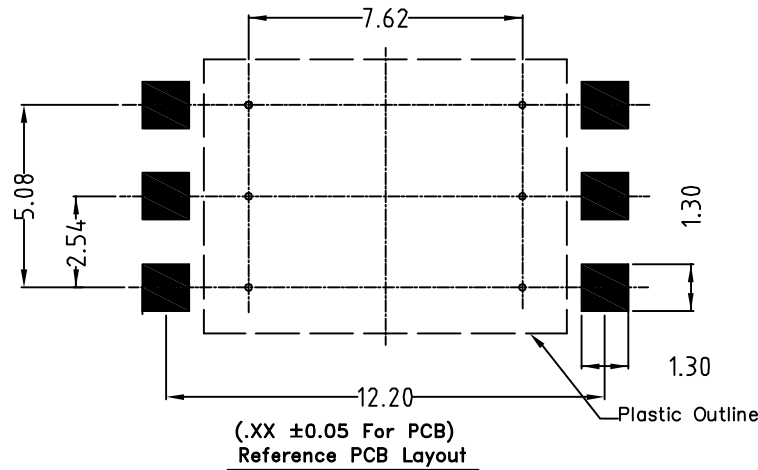
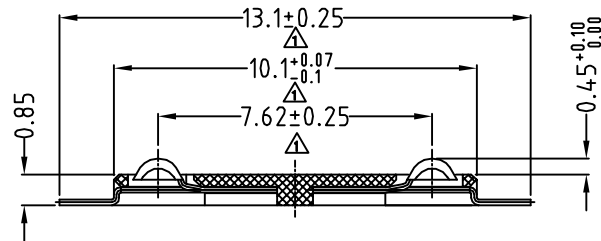



Specifications:

1. General Information
 - . Contact Principle : Friction Technology
 - . Mounting Type : SMT
 - . Data Contact Material : Copper Alloy
 - . Insulator Material : Thermoplastic UL94V-0
 - . Data Contacts Plating : Gold Plated Over Nickel
 2. Electrical Specification
 - . Contact Resistance : 50m Ohms Max.
 - . Insulator Resistance : 1000M Ohms Min.
 - . Dielectrical Withstanding Voltage: 500V AC
 - . Voltage Rating : 30V AC R.M.S. 1 Min.(Sea Level)
 - . Current Rating : 1A Max. 10uA Min.
 3. Mechanical Specification
 - . Contact Force : 0.2N~0.6N
 - . Durability : 10,000 Cycles Min.
 4. Environmental Specification
 - . Operating Temperature : -20°C~+70°C
 - . Operating Humidity : 20%~95% RH
 - . Solderability : Manual Soldering : 360°C 3 Sec. Max.
Vapor Phase : 215°C 30 Sec. Max.
IR Re-flow : 260°C 15 Sec. Max.
- .RoHS compliant

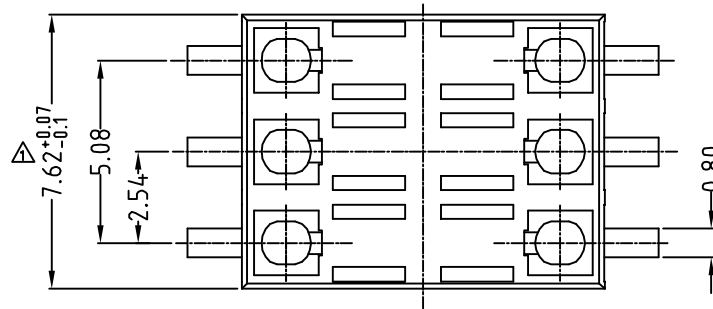

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
08965

APPROVED BY
MEI
CHECKED BY
CATHY
DRAWING BY
QXQ

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.38
.XX ±0.25
ANG. ±1°
UNIT mm

SCALE NONE

REV. A1

△	A1	ADD TOLERANCE	QXQ	02/22/2011
△	A0	NEW RELEASE	XSH	01/05/2006
NO.	REV.	REVISIONS	CHK	DATE