File No.	529DL04806	SHEET	1/1

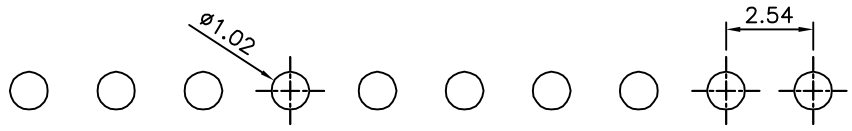

Recommended P.C.B. Layout

SPECIFICATION

Current Rating:3.0 Amps/Contact Max.
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms/Contact
Insulation Resistance:1000 Megaohms At 100V
Operating Temperature:−55°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V−0),Black
RoHS Compliant

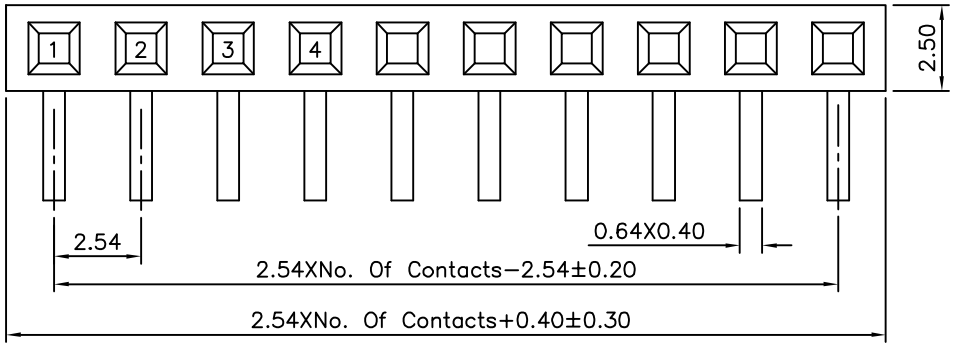

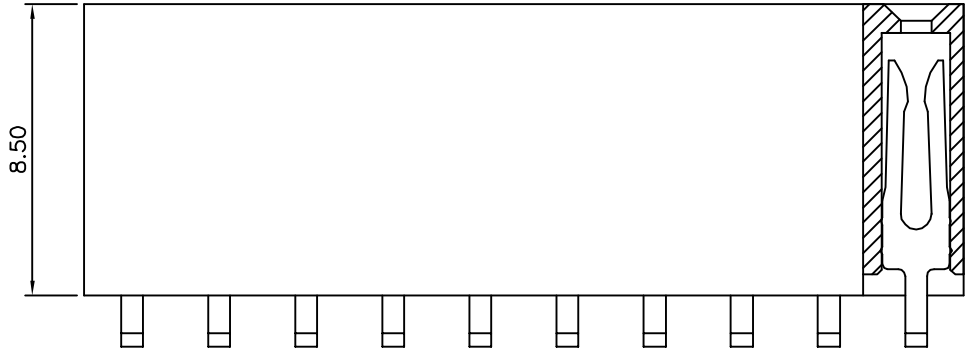

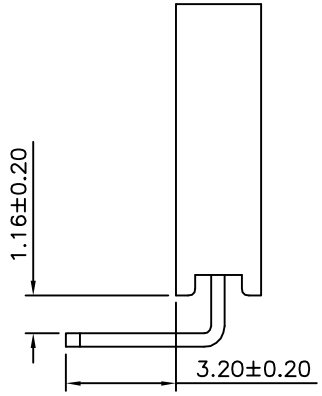

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	12899	APPROVED BY	EMILY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±5°
		CHECKED BY	HZF	
		DRAWING BY	YBL	
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	HZF	06/04/2013