

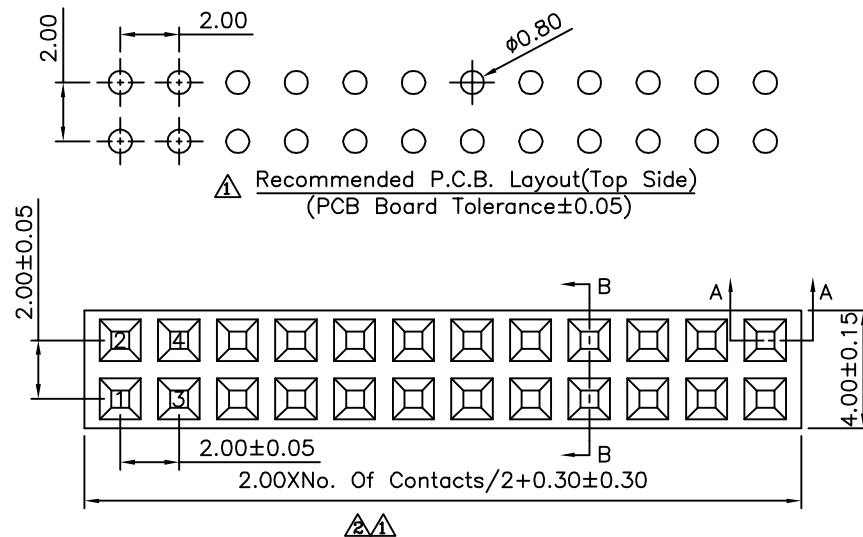


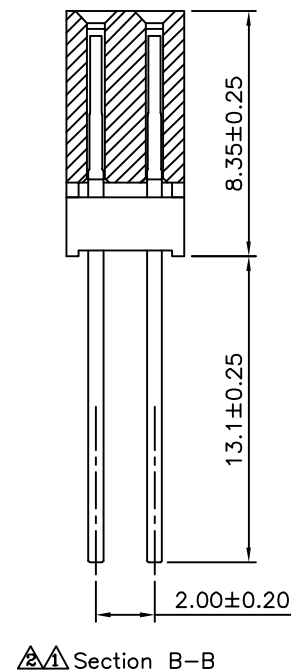

⚠ SPECIFICATION
 Current Rating:2.0 Amp
 Dielectric Withstanding:500V AC/DC
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Operating Temperature:-40°C~+105°C
 Contact:Phosphor Bronze,Gold Plated Over Nickel
⚠ Insulator:PA9T+30%GF,UL94V-0,Black
 RoHS Compliant

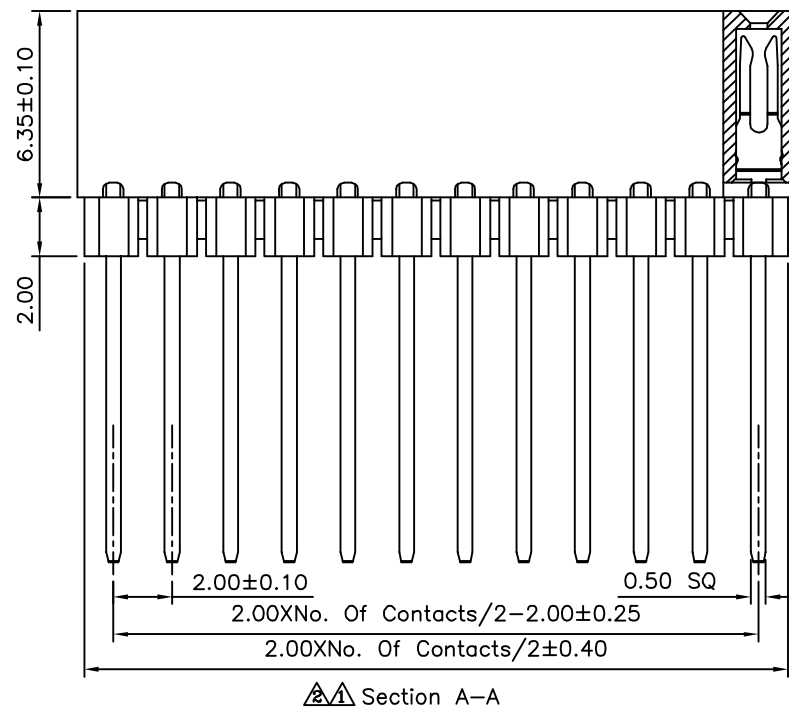

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

13428

SCALE	NONE
-------	------

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

SONG

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
$\triangle$	.X ± 0.40
	.XX ± 0.25
	.XXX ± 0.15
	ANG. $\pm 3^\circ$

UNIT	mm
------	----



	A2	Modify Data	HZF	10/12/2012
	A1	Modify Data	HZF	08/10/2010
	A0	NEW RELEASE	BECKY	03/01/2006
NO. REV.	REVISIONS		CHK	DATE