

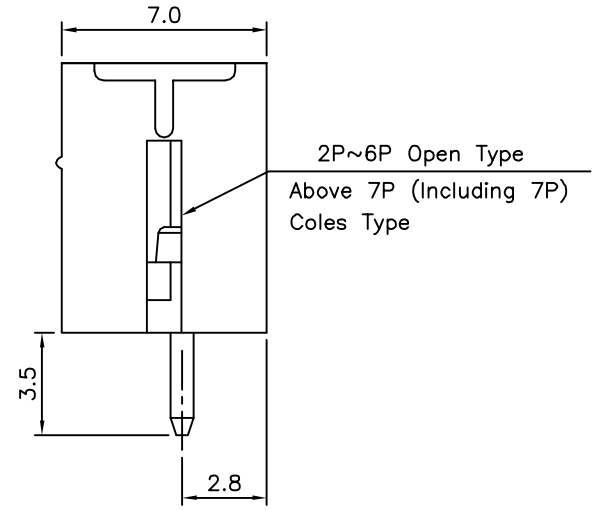


Recommended P.C.B. Layout

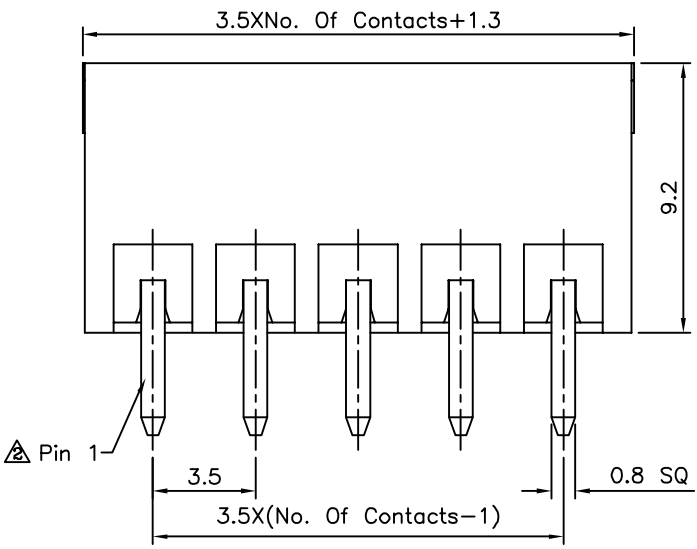

2P~6P Open Type  
Above 7P (Including 7P)  
Coles Type

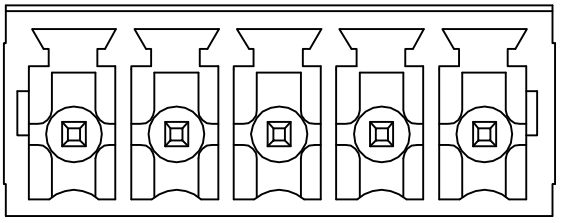

3/4

△ SPECIFICATION

Current Rating:12 Amp/Way Max.  
Voltage Rating:300V AC  
Withstanding Voltage:2500V AC For 1 Minute  
Test Time=60 Sec/1 PCS  
Operation Temperature:-40°C~+105°C  
Soldering Reliability:Test Temperature=250°C±10°C  
5 Seconds Max.  
Insulator Body(Housing):Polyamide+G.F.(UL94V-0)  
,Green  
Solder Pin:Copper Alloy,Tin Plated  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°	UNIT mm	
13757		EMILY				
SCALE		NONE				
REV.		A4		NO. REV.		

△ A4	Modify Data	HZF	05/28/2012
△ A3	Modify Data	HZF	11/23/2011
△ A2	Add Pin 1	HZF	11/22/2011
△ A1	Modify Data	HZF	10/14/2011
△ A0	NEW RELEASE	HZF	04/07/2009
REVISIONS		CHK	DATE