| File No. | 689 | SHEET | 1/1 |
|---|---|---|---|

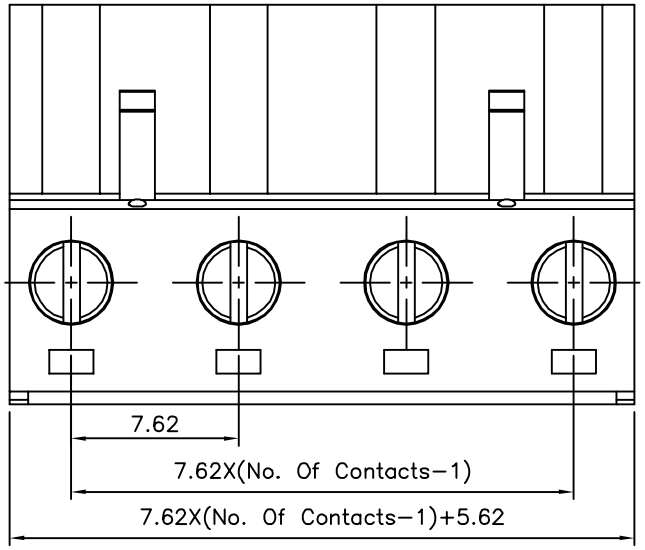


## ⚠1 SPECIFICATION

Current Rating:16 Amp/Way Max.
Voltage Rating:300V AC
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC(1 Minute)
Test Time=60 Sec/1 PCS
Wire Range:12~26 AWG
Operating Temperature:−40°C~+105°C
Torque:5.0 Kgf.cm/M3
Soldering Reliability:
Test Temperature=250°C±10°C,5s Max.
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Contact(Metal Housing):Copper Alloy,Nickel Plated
Wire Guard:Copper Alloy,Tin Plated
Insulator Body(Housing):Polyamide,UL94V−0,Green
RoHS Compliant

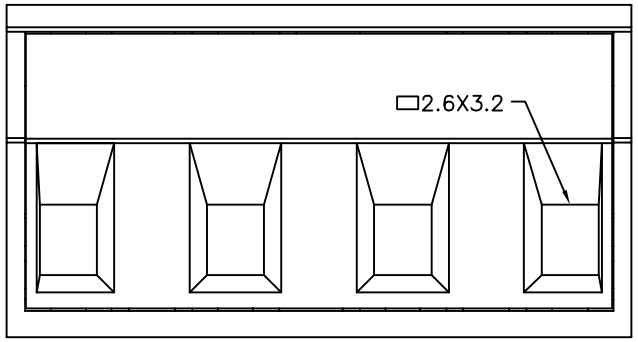


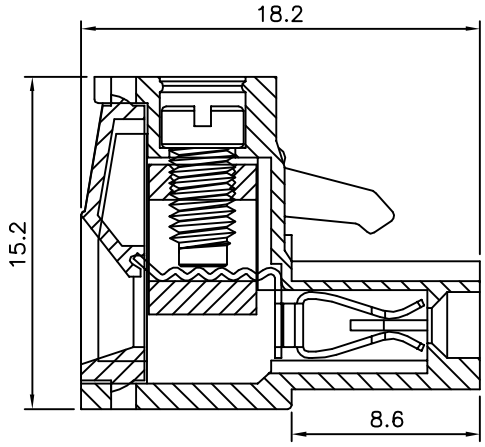


4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

| DRAWING No. | APPROVED BY | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |
|---|---|---|
| 13953 | MEI | X. ±0.30 |
| | CHECKED BY HZF | .X ±0.15 |
| | DRAWING BY GAO | .XX ±0.05 |
| | | ANG. ±1° |
| SCALE NONE | REV. A1 | UNIT mm |

| NO. | REV. | REVISIONS | CHK | DATE |
|---|---|---|---|---|
| ⚠1 | A1 | Modify Spec. | HZF | 03/12/2013 |
| ⚠0 | A0 | NEW RELEASE | HZF | 03/11/2010 |