

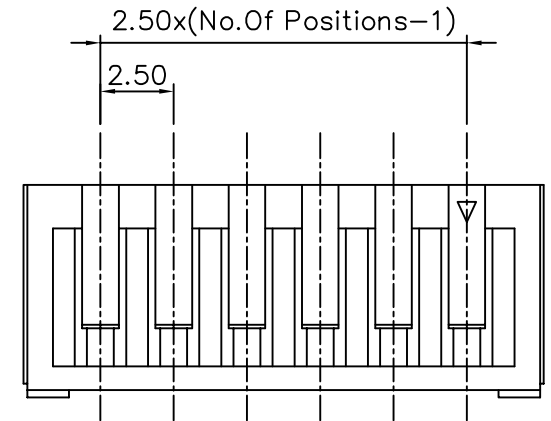


SPECIFICATIONS

Current Rating : AC ,DC 2A
 Voltage Rating : AC 250V DC
 Withstand Voltage : AC 800V/Min.
 Insulation Resistance;1000 Megohms Min.
 Temperature Range : -25°C To +85°C
 Contact Resistance : Initial Value/10Milliohms Max.
 After Environmental Testing/20Milliohms Max.
 Applicable PC Board Thickness:0.8-1.6mm
 Material : Nylon ,UL 94V-0

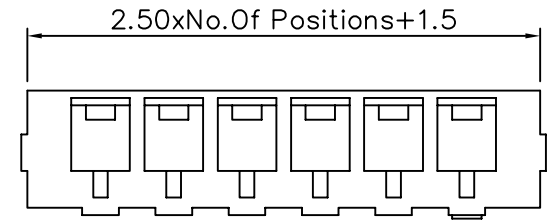

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.


DRAWING No.
 15691

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

SCALE NONE

REV. A



AREA	REVISIONS	CHK	DATE
------	-----------	-----	------