

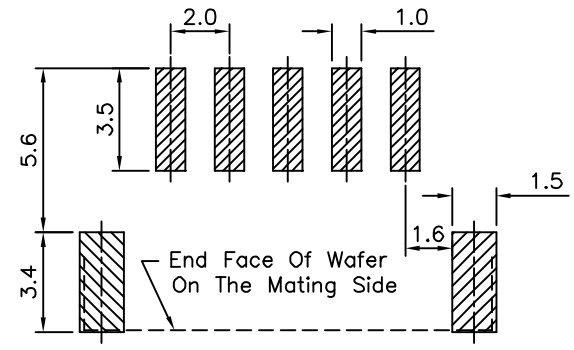
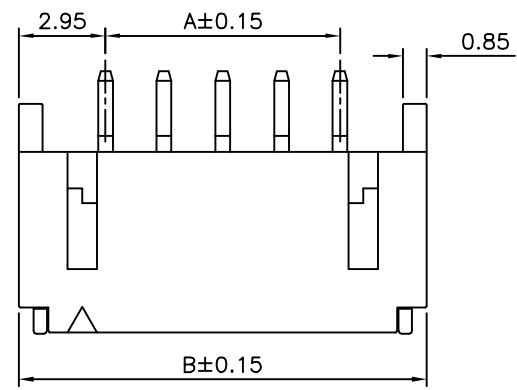
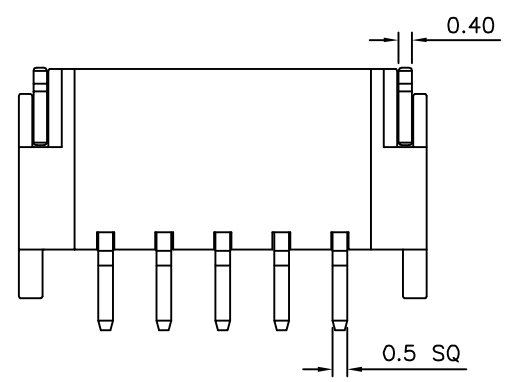


△ SPECIFICATION

Current Rating:2A AC/DC
 Voltage Rating:100V AC/DC
 Withstand Voltage:800V AC/Minute
 Contact Resistance:Initial Value 10 Milliohms Max.
 After Environmental Testing 20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-40°C~+85°C
 Applicable PC Board Thickness:0.8~1.6mm
 Insulator:PA6T(UL94V-0)
 △ Contact:Brass,Tin Plated Over Nickel
 RoHS Compliant

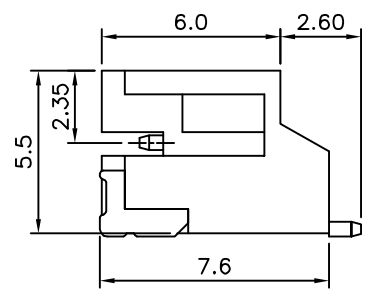

Recommended P.C.Board Layout △

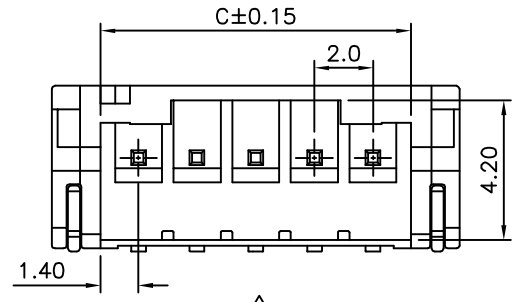



Pin	A	B	C
2	2.00	8.00	4.80
3	4.00	10.00	6.80
4	6.00	12.00	8.80
5	8.00	14.00	10.80
6	10.00	16.00	12.80
7	12.00	18.00	14.80
8	14.00	20.00	16.80
9	16.00	22.00	18.80
10	18.00	24.00	20.80
11	20.00	26.00	22.80
12	22.00	28.00	24.80
13	24.00	30.00	26.80
14	26.00	32.00	28.80
15	28.00	34.00	30.80
16	30.00	36.00	32.80

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △△ .X ±0.3 .XX ±0.2 ANG.
17313		EMILY		
		CHECKED BY HZF		
		DRAWING BY SONG		UNIT mm
SCALE	NONE	REV.	A2	


NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	10/04/2013
△A1		Modify Data	HZF	08/09/2012
△A0		NEW RELEASE	HZF	12/27/2007

SPECIFICATION
 Q'ty:1000 PCS/Reel
 RoHS Compliant

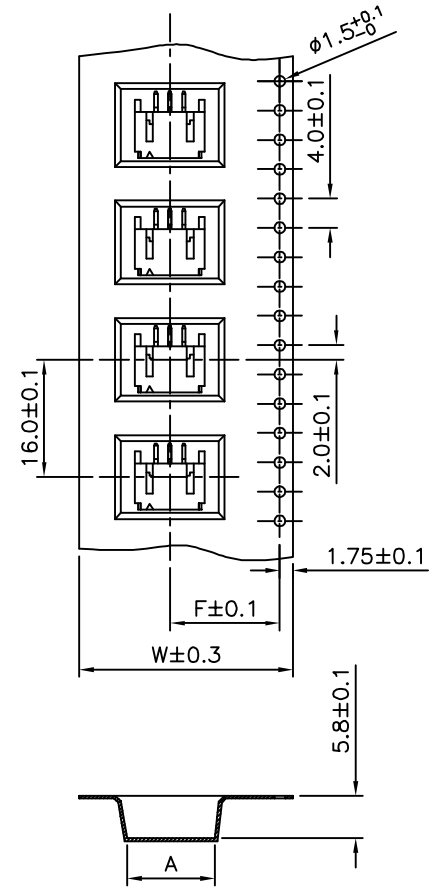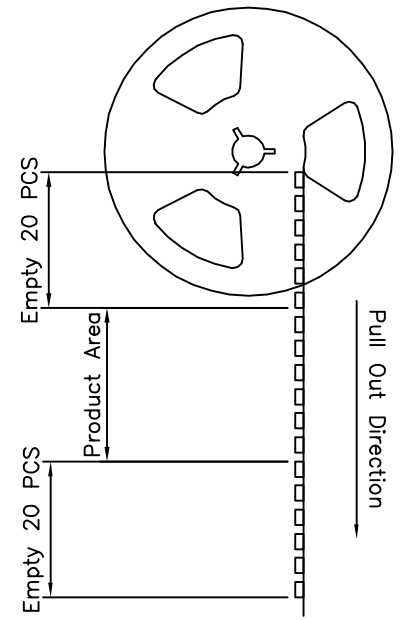

2~4P Contacts

$A = 2.0 \times (\text{No. Of Contacts} - 1) + 6.3$

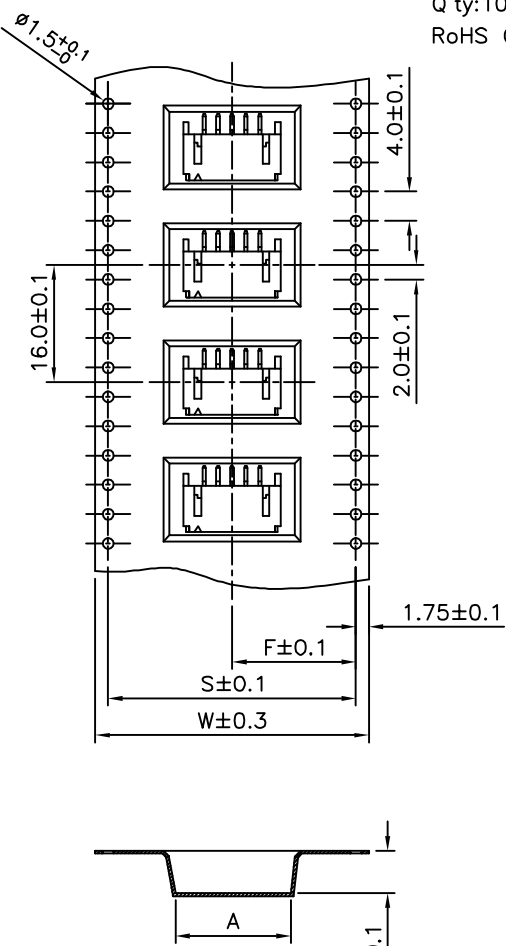

5~16P Contacts

Pin	W	F	S
2	24	11.5	
3	24	11.5	
4	24	11.5	
5	32	14.2	28.4
6	32	14.2	28.4
7	32	14.2	28.4
8	44	20.2	40.4
9	44	20.2	40.4
10	44	20.2	40.4
11	44	20.2	40.4
12	44	20.2	40.4
13	44	20.2	40.4
14	56	26.2	52.4
15	56	26.2	52.4
16	56	26.2	52.4

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15 ANG.
17313		EMILY		
		CHECKED BY HZF		
		DRAWING BY SONG		UNIT mm
SCALE	NONE	REV.	A2	

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	10/04/2013
△A1		Modify Data	HZF	08/09/2012
△A0		NEW RELEASE	HZF	12/27/2007