
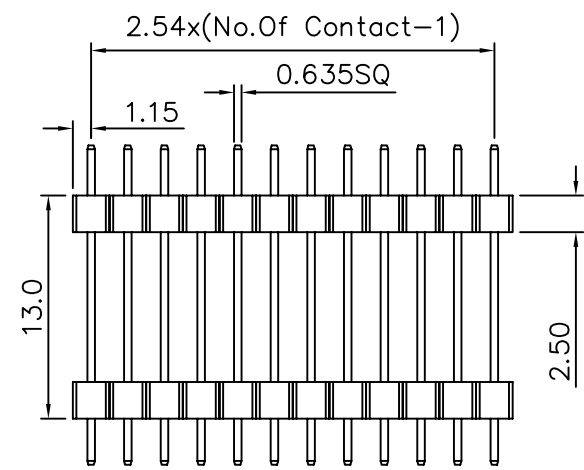



SPECIFICATIONS

Current Rating : 1AMP
 Insulation Resistance : 5000 Megohms Min. At DC 500V
 Contact Resistance : 20 Milliohms Max. At DC 100mA
 Operating Temperature : -55°C To +105°C
 Contact : Brass, Gold Flash
 Insulator : 30% Glass Filled PBT, UL 94V-0

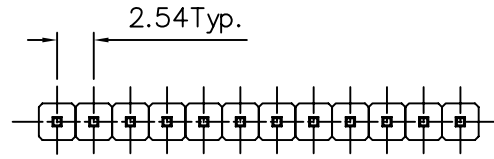

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 18670
 SCALE NONE

APPROVED BY MEI
 CHECKED BY BECKY
 DRAWING BY HZF
 REV. A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	BECKY	2004/06/17