





△ SPECIFICATION
 Current: 3A
 Withstanding Voltage: 1000V AC RMS
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -55°C~+105°C
 Housing: PBT(UL94V-0), Black
 Contact: Copper Alloys, Gold Plated
 No. Of Contacts: 2~40 Contacts
 RoHS Compliant

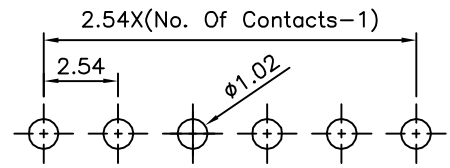

Recommended P.C.B. Layout

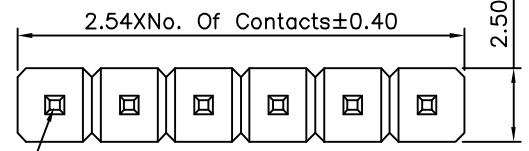

Pin 1

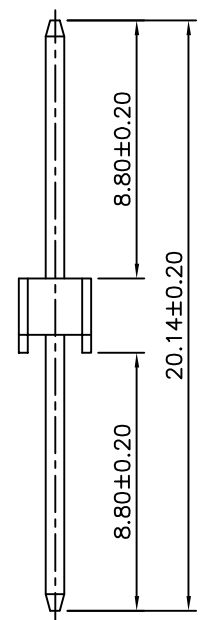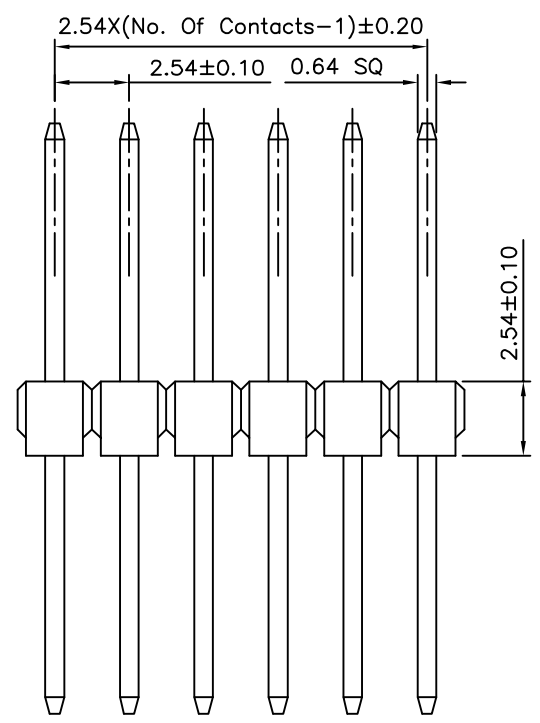

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5° |
| 19118 | | EMILY | | |
| | | CHECKED BY | | |
| | | HZF | | |
| | | DRAWING BY | | |
| | | SONG | | |
| SCALE | NONE | REV. | A1 | UNIT |
| | | | | mm |

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A1 | | Modify Data | HZF | 08/08/2011 |
| △ A0 | | NEW RELEASE | HZF | 02/05/2008 |