

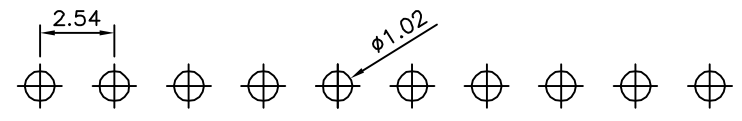
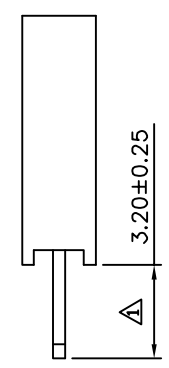


△ SPECIFICATION

Current Rating:3.0 Amp/Contact Max.
 Withstanding Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max./Contact
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operation Temperature:-55°C~+105°C
 Contact:Brass,Gold Plated Over Nickel
 Insulator:PBT(UL94V-0),Black
 RoHS Compliant

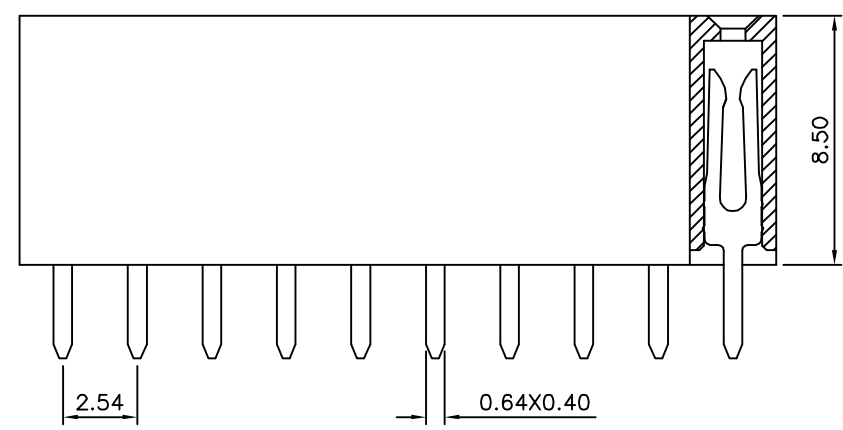

Recommended P.C.B. Layout

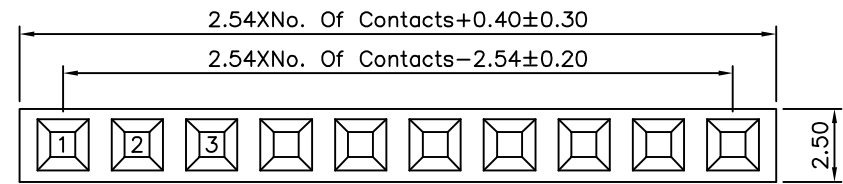

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±5°
19742		MEI		
		CHECKED BY		
		DRAWING BY	QQJ	
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	07/26/2010
△ A0		NEW RELEASE	HZF	03/04/2009