

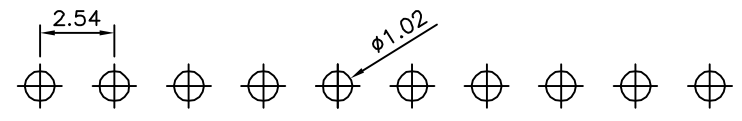
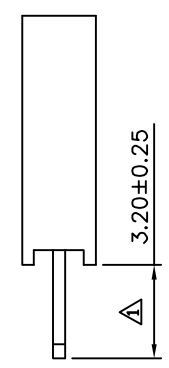


**△ SPECIFICATION**

Current Rating:3.0 Amp/Contact Max.  
 Withstanding Voltage:1000V AC/Minute  
 Contact Resistance:20 Milliohms Max./Contact  
 Insulation Resistance:1000 Megaohms Min. At 100V  
 Operation Temperature:-55°C~+105°C  
 Contact:Brass,Gold Plated Over Nickel  
 Insulator:PBT(UL94V-0),Black  
 RoHS Compliant

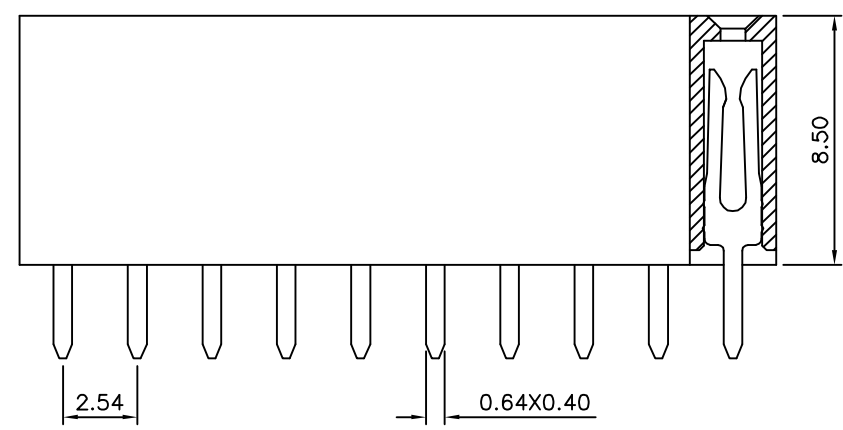

Recommended P.C.B. Layout

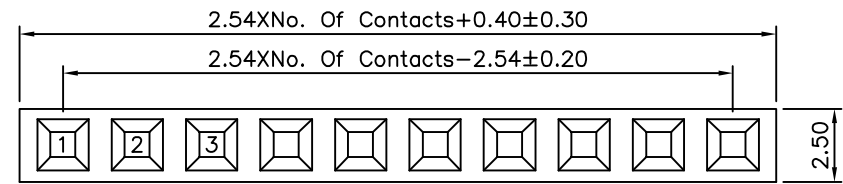

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

|             |      |                |    |  |
|-------------|------|----------------|----|--|
| DRAWING No. |      | APPROVED BY    |    | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br>X. ±0.50<br>.X ±0.30<br>.XX ±0.20<br>.XXX ±0.10<br>ANG. ±5° |
| 19743       |      | MEI            |    |  |
|             |      | CHECKED BY HZF |    |  |
|             |      | DRAWING BY QQJ |    |  |
| SCALE       | NONE | REV.           | A1 | UNIT mm  |

|      |      |             |     |            |
|------|------|-------------|-----|------------|
| NO.  | REV. | REVISIONS   | CHK | DATE       |
| △ A1 |      | Modify Data | HZF | 07/26/2010 |
| △ A0 |      | NEW RELEASE | HZF | 03/04/2009 |