

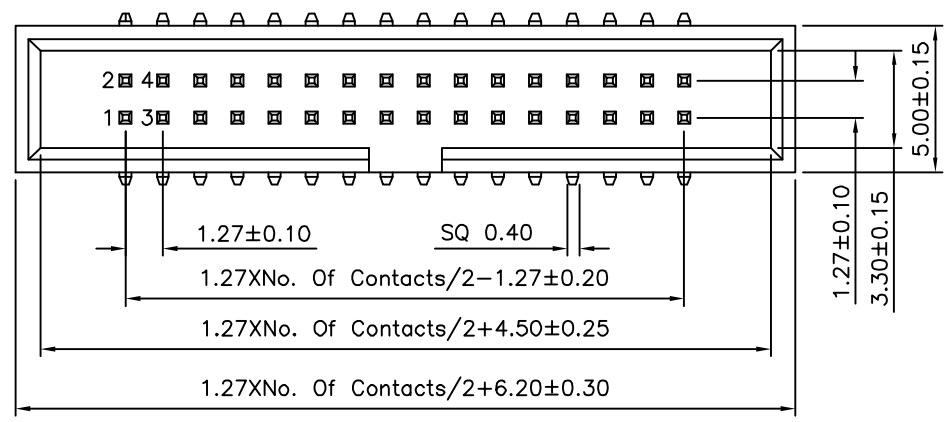


△ Recommended P.C.B. Layout (Top Side)
(PCB Board Tolerance ±0.05)

△ SPECIFICATION
 Current Rating: 1 Amp
 Withstanding Voltage: 500V AC/DC
 Insulation Resistance: 1000 Megaohms Min.
 Contact Resistance: 20 Milliohms Max.
 Operation Temperature: -40°C ~ +105°C
 △ Insulator: PA9T+30%G.F.(UL94V-0), Black
 Contact: Brass, Gold Plated Over Nickel
 RoHS Compliant

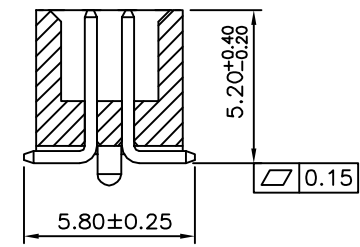

△

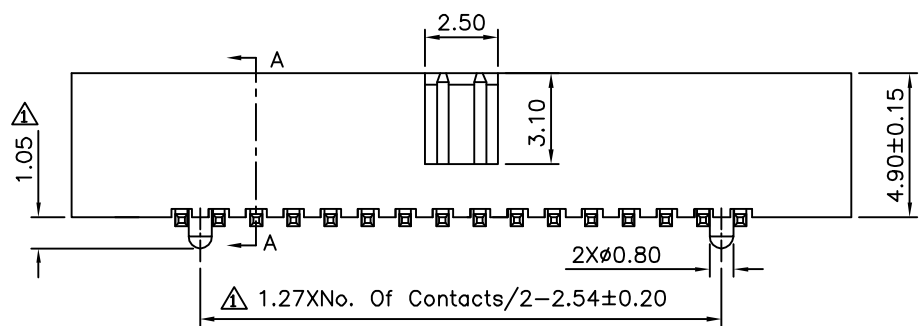

△ Section A-A

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.40 △ .XX ±0.25 △ .XXX ±0.15 ANG. ±3°
20317		MEI		
		CHECKED BY	HZF	
		DRAWING BY	SONG	
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Spec.	HZF	11/19/2012
△ A1		Modify Data	HZF	11/02/2011
△ A0		NEW RELEASE	HZF	10/15/2007