
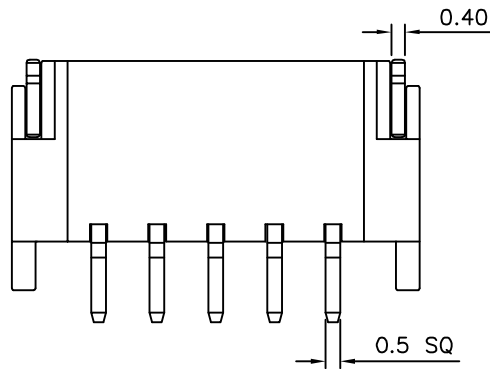
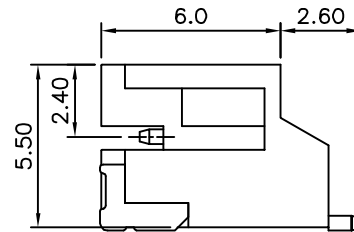
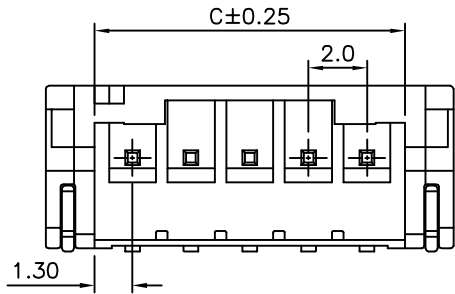
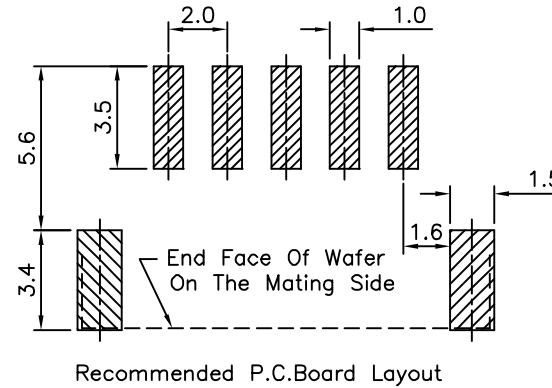


**△ SPECIFICATION**

Current Rating:2A AC/DC  
 Voltage Rating:100V AC/DC  
 Withstand Voltage:800V AC/Minute  
 Contact Resistance:Initial Value 10 Milliohms Max.  
 After Environmental Testing 20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Temperature Range:-40°C~+85°C  
 Applicable PC Board Thickness:0.8~1.6mm  
 Insulator:PA6T(UL94V-0)  
 Contact:High Strength Brass,Tin Plated Over Nickel  
 RoHS Compliant

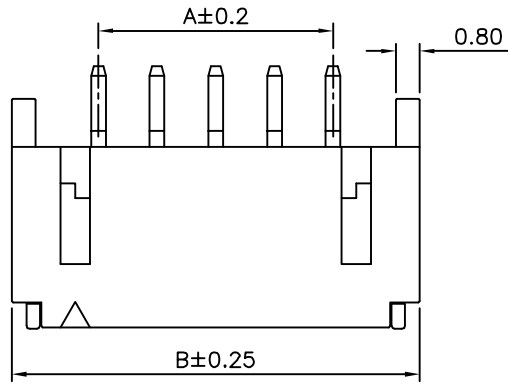

△ Pin	A	B	C
2	2.00	7.90	4.80
3	4.00	9.90	6.80
4	6.00	11.90	8.80
5	8.00	13.90	10.80
6	10.00	15.90	12.80
7	12.00	17.90	14.80
8	14.00	19.90	16.80
9	16.00	21.90	18.80
10	18.00	23.90	20.80
11	20.00	25.90	22.80
12	22.00	27.90	24.80
13	24.00	29.90	26.80
14	26.00	31.90	28.80
15	28.00	33.90	30.80
16	30.00	35.90	32.80

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 20519

APPROVED BY  
 EMILY  
 CHECKED BY  
 HZF  
 DRAWING BY  
 SONG

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 △ .X ±0.35  
 .XX ±0.25  
 ANG.

SCALE NONE REV. A1 UNIT mm

NO. REV. REVISIONS CHK DATE

△ A1 Modify Data HZF 08/09/2012  
 △ A0 NEW RELEASE