


SPECIFICATION

Current Rating: When Applying Current Only To Signal Terminals:
 1.0A (For Terminal No. 2, 3 And 4)
 When Applying Current Only To Power Terminals:
 1.8A (For Terminal No. 1 And 5)
 0.5A (For Terminal No. 2, 3 And 4)

Voltage Rating: 30V AC
 Insulation Resistance: 100 Megaohms At 100V DC
 Dielectric Withstanding Voltage: 100V RMS AC For 1 Minute
 Contact Resistance: 30 Milliohms Max.
 Operating Temperature: -30°C ~ +80°C
 Housing: LCP (UL94V-0), Black
 Contact: C2680, Gold Flash Over Nickel
 Shell: Stainless Steel, Tin Plated Over Nickel
 RoHS Compliant

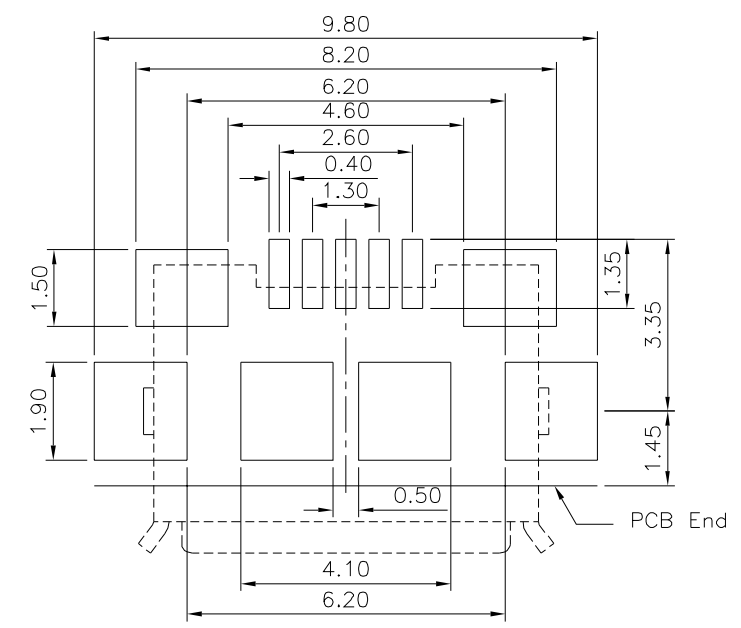

Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 X.* ±5° .X ±0.25 .X.* ±2° .XX ±0.15 .XX.* ±1°	
20696		MEI			
		CHECKED BY	HZF		
		DRAWING BY	CYP		
SCALE	NONE	REV.	A3	UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
△A3		Modify Data	HZF	07/11/2016
△A2		Modify Data	HZF	07/15/2015
△A1		Modify Data	HZF	06/23/2015
△A0		NEW RELEASE	HZF	05/21/2014