
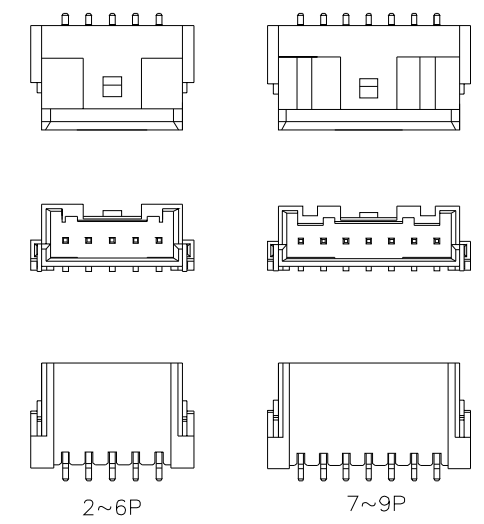

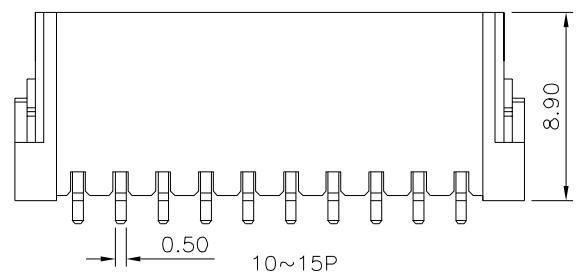
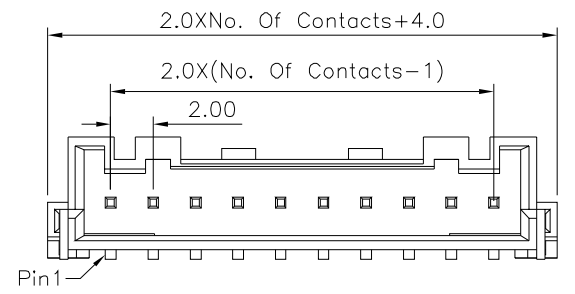


SPECIFICATION
 Current Rating:3A AC/DC Max.
 Voltage Rating:250V AC/DC
 Dielectric Withstanding Voltage:800V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Ambient Temperature Range:-25°C~+85°C
 Insulator:PA6T(UL94V-0),Nature
 Contact:Brass,Tin Plated
 Solder Tab:Brass,Tin Plated
 No. Of Contacts:2~15 Positions
 RoHS Compliant

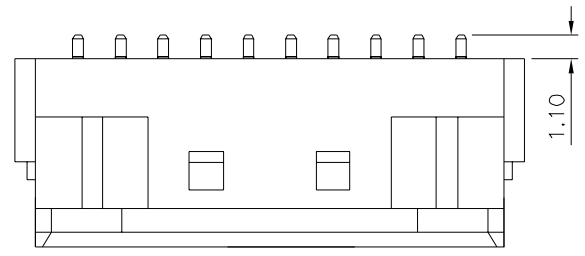

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 .XXX ±0.10
20974		MEI		
		CHECKED BY HZF		
		DRAWING BY CYP		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	DESCRIPTION	CHK	DATE
△A0		NEW RELEASE	HZF	06/28/2016
		REVISIONS		