File No.	182HA11217	SHEET	1/1

SPECIFICATION

Current: 3A
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Withstanding Voltage: 1000V AC RMS
Operation Temperature: −55°C~+105°C
Housing: PA6T,UL94V−0,Black
Contact: Brass,Gold Flash Over Nickel
No. Of Contacts:02~40 Contacts
RoHS Compliant

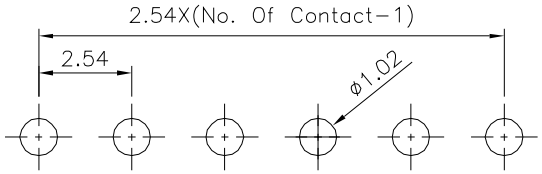

Recommended P.C.B. Layout

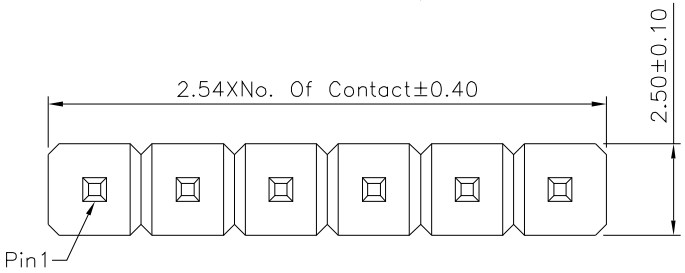

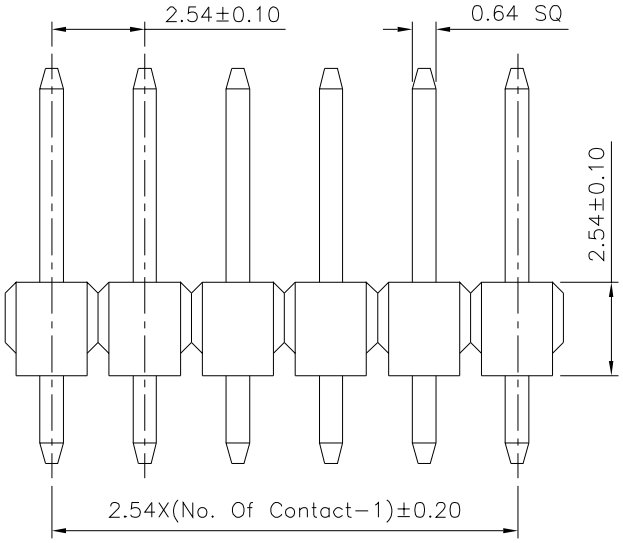

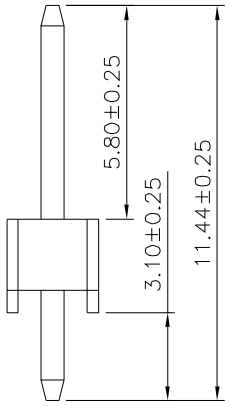

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	21141		
APPROVED BY	MEI		
CHECKED BY	HZF		
DRAWING BY	CYP		
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.38
.XX ±0.25
ANG. ±5°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	HZF	07/11/2016